

ESTABLISHED 1870

REGATTA YACHT PAINT

ACTIVE INGREDIENTS
Cuprous Oxide
(copper as metallic 35.3%)
INERT INGREDIENTS


41.0%
59.0%
100.0%

"FINEST
FOR
FIBERGLASS"

VINYLTEX 65
FAST BLUE ANTI-FOULING

CAUTION: KEEP OUT OF
REACH OF CHILDREN. SEE BACK
PANEL FOR OTHER CAUTIONS

1 U.S. GALLON
3.785 LITERS

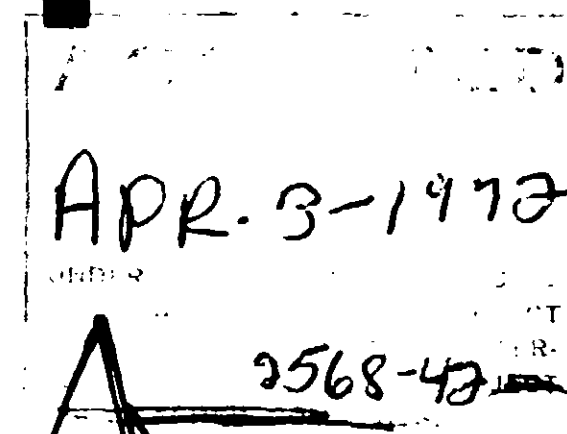

ANALYSIS

Cuprous Oxide	41.0%
Titanium Dioxide	7.6%
Phthalocyanine Blue	2.4%
Vinyl Resin, Rosin	23.5%
Aromatic Hydrocarbons	9.5%
Ketones	14.1%
Tri Cresyl Phosphate	1.9%
	100.0%

EPA Reg. No. 2568-42

MANUFACTURED BY

BALTIMORE COPPER PAINT CO.

BALTIMORE, MD. 21230

NEW YORK, N.Y. 10038

ISHED 1870

REGATTA PAINT

LYLTEX 65
ANTI-FOULING


ON: KEEP OUT OF
LDREN. SEE BACK
OTHER CAUTIONS

GALLON
LITERS

ACTURED BY

PPER PAINT CO.

NEW YORK, N.Y. 10038

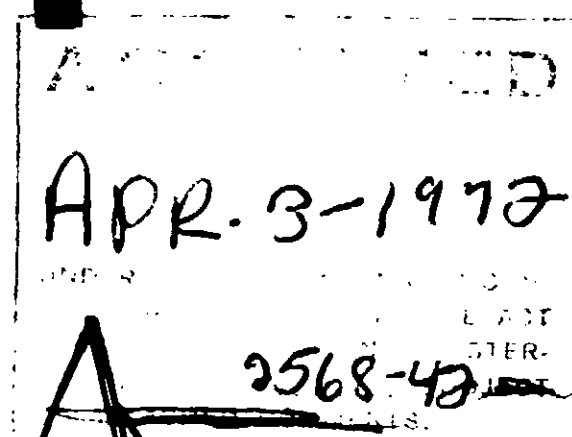

ANALYSIS

Cuprous Oxide	41.0%
Titanium Dioxide	7.6%
Phthalocyanine Blue	2.4%
Vinyl Resin, Rosin	23.5%
Aromatic Hydrocarbons	9.5%
Ketones	14.1%
Tri Cresyl Phosphate	1.9%

EPA Reg. No. 2568-42 100.0%

VINYLTEX 65 FAST BLUE ANTI-FOULING

Outstanding Anti-Fouling Protection . . . the ultimate in a fast, hard, racing surface for wood, fibreglass or metal.

DIRECTIONS — WOODEN HULLS. Apply directly to dry bare wood, thinning the first coat 10% with Regatta Vinyltex 54 Solvent. Apply other coats full body, replacing solvent lost by evaporation with Regatta Vinyltex 54 Solvent. Brush, spray or roll a full wet coat so the Anti-Fouling paint will flow together eliminating any pin-holes or "holidays". Use at least 3 coats. Flow on with minimum brushing to prevent dissolving and working up undercoats.

STEEL and ALUMINUM HULLS. Prepare surface with Regatta Vinyltex 50 Wash Primer and four coats Regatta Vinyltex 53 Zinc Chromate Anti-Corrosive or three coats of Regatta Epoxydur Black. Apply at least two coats of Regatta Vinyltex 65 Anti-Fouling Fast Blue.

FIBREGLASS HULLS. Sand thoroughly with medium grit paper and wash with 3830 Fibreglass Solvent Wash to remove all traces of mold release agent. For added insurance of good adhesion, a coat of REGATTA Fibreglass Primer may be applied next. Then, apply two coats of Vinyltex 65 Anti-Fouling Fast Blue.

SPRAYING. Thin 10% with Regatta Vinyltex 54 Solvent for spraying. Wash Equipment with Regatta Vinyltex 54 Solvent.

DRYING TIME. Allow 1 hour between coats and at least 4 hours between the final coat and launch.

WARNING! FLAMMABLE! Keep away from heat, sparks and open flame. CONTAINS COMPOUNDS THAT MAY BE FATAL IF SWALLOWED. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Do not breathe vapor or spray mist. Do not get in eyes, or on clothing. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. KEEP OUT OF REACH OF CHILDREN. Use with adequate ventilation. Do not take internally. DO NOT REUSE CONTAINER. DESTROY WHEN EMPTY.