

ESTABLISHED 1870

REGATTA YACHT PAINT

3017

FAF RED

Fiberglass Anti-Fouling

**CAUTION: KEEP OUT OF
REACH OF CHILDREN. SEE BACK
PANEL FOR OTHER CAUTIONS.**

1 U.S. GALLON
3.785 LITERS

MANUFACTURED BY

BALTIMORE COPPER PAINT CO.

BALTIMORE, MD. 21230

NEW YORK, N.Y. 10038


ACTIVE INGREDIENTS

Cuprous Oxide	45.9%
(Copper as Metal 3.0%)	
Bis (Tributyltin) Oxide	1.4%
INERT INGREDIENTS	52.7%
	100.0%

ANALYSIS

PIGMENT—64.8%	
Cuprous Oxide	45.9%
Iron Oxide	6.9%
Inert Extenders	12.0%
VEHICLE—35.2%	
Processed Rosin	16.1%
Coumarone-Indene Resin	4.6%
Bis (tributyltin) Oxide	1.4%
Aromatic Hydrocarbons	6.8%
Mineral Spirits	5.9%
Additives	0.3%
Total	100.0%

E.P.A. Reg. No. 2568-44

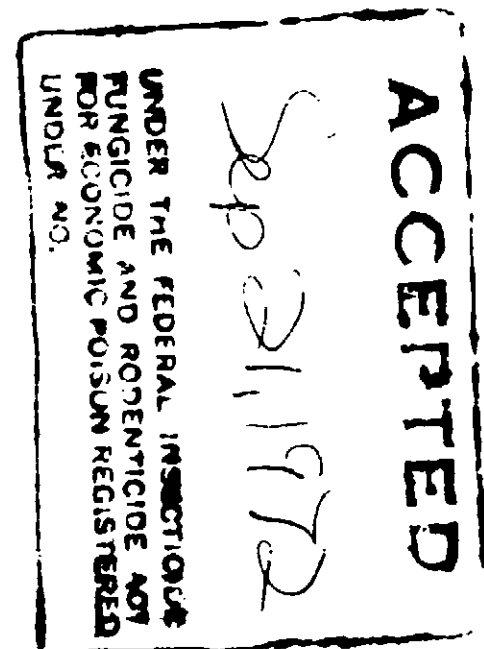

FAF has been
glass. However,
primed metal in
condition.

Stir thoroughly
wood—allow it to
dry. It is not advised
to spray gun with
more than 10% R

Fiberglass. Apply
down carefully.
Solvent Wash
gel-coat.

An alternate
Wash and 33%
necessity of
Wood. Apply


Metal. Apply
REGATTA 36

Previously Co
3802 Xylol Sol

**CAUTION! CO
FLAME. CONT
any interior s
sills, toys, cr
vapor or spray
OUT OF REACH
or on clothing
with soap and
Keep container
container. Do**


REGATTA PAINT

ing

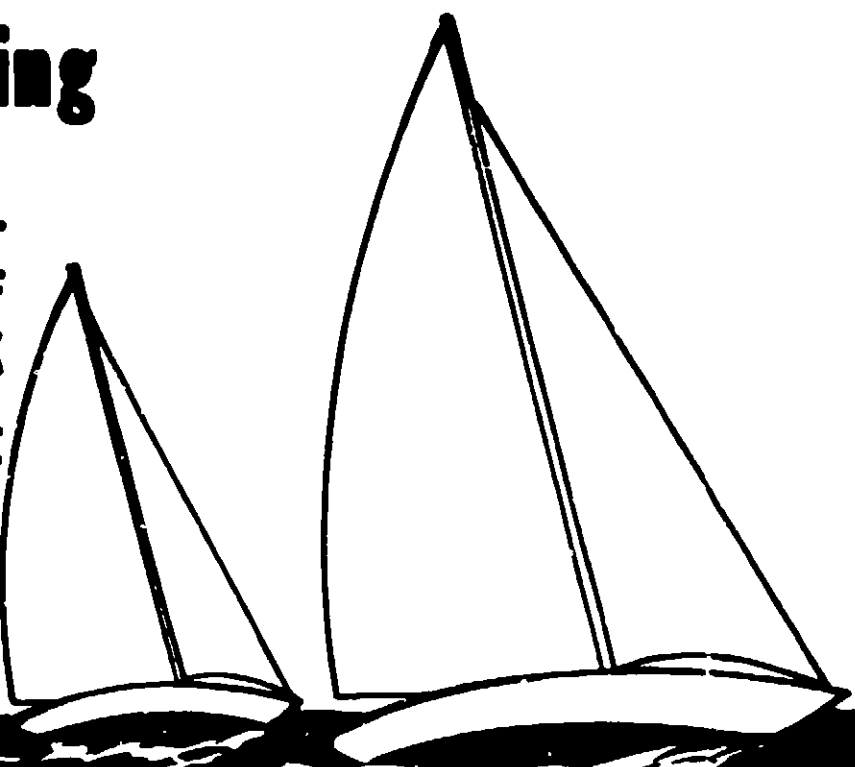

R PAINT CO.

NEW YORK, N.Y. 10038

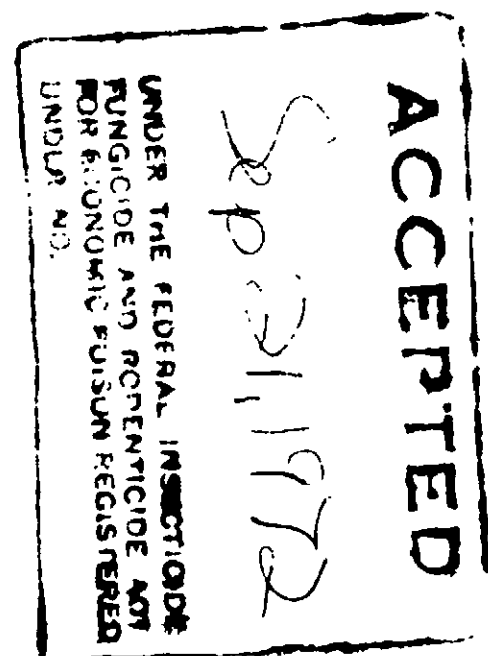

Resin	45.0%
Solvents	6.9%
St. 2%	12.0%
Colophony-Indene Resin	16.1%
Ala (tributyltin) Oxide	4.6%
Aromatic Hydrocarbons	1.4%
Mineral Spirits	6.9%
Additives	5.9%
	0.3%

Total 100.0%

E.P.A. Reg. No. 2568-44

FAF has been formulated using modern resins, selected for maximum adhesion to fibre-glass. However, it will give completely satisfactory results when used on wood, properly primed metal or over most types of a previous season's anti-fouling paint that is in good condition.

DIRECTIONS

Stir thoroughly both before and during application. Apply at least two coats—three on bare wood—allowing 4 to 6 hours drying time between coats and between final coat and launch. It is not advisable to delay launch more than 3 days after final coat. Apply by brush, roller, or spray gun. Ordinarily thinning is not necessary, but where it is desired, add not more than 10% REGATTA #3800 Thinner.

SURFACE PREPARATION

Fibreglass. Sand the bottom thoroughly, using medium grit (about #100) paper. Wipe down carefully with REGATTA 3830 Fibreglass Solvent Wash. Use generous quantities of Solvent Wash and clean rags in order to remove the wax-like substance from the fibreglass gel-coat.

An alternate method of surface preparation is to use REGATTA 3840 Fibreglass Pre-Prime Wash and 3351 Fibreglass No-Sand Primer according to directions, thereby avoiding the necessity of sanding.

Wood. Apply three coats of FAF directly to bare wood.

Metal. Apply one coat of REGATTA Vinyltex 50/51 Wash Primer followed by two coats of REGATTA 3630/3631 Epoxydur Black Mastic.

Previously Coated Surfaces. Sand thoroughly, then wipe down with #3800 Thinner or 3802 Xylol Solvent.

CAUTION! COMBUSTIBLE! DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COMPOUNDS HARMFUL OR FATAL IF SWALLOWED. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist. Wash thoroughly after handling and before eating or smoking. **KEEP OUT OF REACH OF CHILDREN.** May be absorbed through skin. Do not get in eyes, on skin or on clothing. In case of contact, immediately remove contaminated clothing and wash with soap and water. Wash contaminated clothing before reuse. Causes skin irritation.

Keep container closed when not in use. Use with adequate ventilation. Do not reuse empty container. Destroy it by perforating or crushing. Burn or discard in a safe place.