

ESTABLISHED 1870

REGATTA YACHT PAINT

3022

BALTOGUARD BLUE

Anti-Fouling

**CAUTION: KEEP OUT OF
REACH OF CHILDREN. SEE BACK
PANEL FOR OTHER CAUTIONS.**

1 U.S. GALLON
3.785 LITERS

MANUFACTURED BY

BALTIMORE COPPER PAINT CO.

BALTIMORE, MD. 21230

NEW YORK, N.Y. 10038

ACTIVE INGREDIENTS	
Cuprous Oxide*	46.27%
Tributyltin Fluoride	0.91%
2-(Ethylamino)-4-(Isopropylamino)- 6-(Methylthio)-s-Triazine	0.33%
INERT INGREDIENTS	52.49%
*(Copper as metal 41.88%)	

100.00%

ANALYSIS	
PIGMENT 60.07%	
Cuprous Oxide	46.27%
Tributyltin Fluoride	0.91%
2-(Ethylamino)-4-(Isopropylamino)- 6-(Methylthio)-s-Triazine	0.33%
Zinc Oxide	2.90%
Titanium Dioxide, Type II	5.57%
Phthalocyanine Blue, IX-D	1.04%
Inert Pigment	3.05%
VEHICLE 39.93%	
Chlorinated Rubber	7.65%
Rosin	3.88%
Tricresyl Phosphate	2.61%
Aromatic Hydrocarbons	25.16%
Additives	0.63%

100.00%

EPA Reg. No. 2568-51

Baltoguard is
fibreglass, pr
is in good co

Stir thorough
4 to 6 hours
more than 3
is not necess:

FIBREGLASS:
down careful
Solvent Wash
gel-coat.

An alternate
Wash and 33
necessity of s

WOOD: Apply


METAL: Appl
REGATTA 36:

PREVIOUSLY
Solvent.

**CAUTION! CO
FLAME. CON**
on any interio
sills, toys, cr
vapor or spra
OUT OF REA
skin or on c
wash with so:

Keep contain
empty contain
Do not conta

REGATTA ANTIFOULING PAINT BLUE

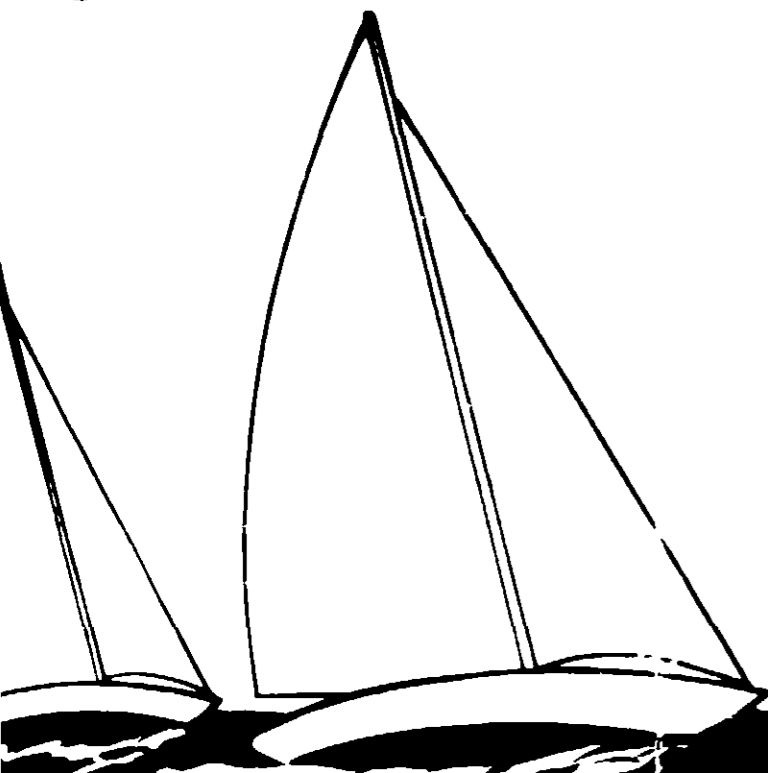

ANALYSIS

PIGMENT 60.07%

Cuprous Oxide	46.27%
Tributyltin Fluoride	0.91%
2-(Ethylamino)-4-(Isopropylamino)- 6-(Methylthio)-s-Triazine	0.33%
Zinc Oxide	2.90%
Titanium Dioxide, Type II	5.57%
Phthalocyanine Blue, IX-D	1.04%
Inert Pigment	3.05%

VEHICLE 39.93%

Chlorinated Rubber	7.65%
Rosin	3.88%
Tricresyl Phosphate	2.61%
Aromatic Hydrocarbons	25.18%
Additives	0.63%
100.00%	

EPA Reg. No. 2568-51

Baltoguard is an anti-fouling paint based on Chlorinated Rubber. It may be used on wood, fiberglass, properly primed metal or most types of previously-sealed anti-fouling paint that is in good condition.

DIRECTIONS

Stir thoroughly both before and during application. Apply at least two coats, allowing 4 to 6 hours drying time between final coat and launch. It is not advisable to delay launch more than 3 days after final coat. Apply by brush, roller, or spray gun. Ordinarily thinning is not necessary, but where it is desired, add not more than 10% Regatta 3802 Xylol Solvent.

SURFACE PREPARATION

FIBREGLASS: Sand the bottom thoroughly, using medium grit (about #100) paper. Wipe down carefully with REGATTA 3830 Fibreglass Solvent Wash. Use generous quantities of Solvent Wash and clean rags in order to remove the wax-like substance from the fibreglass gel-coat.

An alternate method of surface preparation is to use REGATTA 3840 Fibreglass Pre-Prime Wash and 3351 Fibreglass No-Sand Primer according to directions, thereby avoiding the necessity of sanding.

WOOD: Apply three coats Baltoguard directly to bare wood. Allow 4-6 hours between coats.

METAL: Apply one coat of REGATTA Vinyltex 50/51 Wash Primer followed by two coats of REGATTA 3630/3631 Epoxydur Black Mastic.

PREVIOUSLY COATED SURFACES: Sand thoroughly, then wipe down with 3802 Xylol Solvent.

CAUTION! COMBUSTIBLE! DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COMPOUNDS HARMFUL OR FATAL IF SWALLOWED. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist. Wash thoroughly after handling and before eating or smoking. KEEP OUT OF REACH OF CHILDREN. May be absorbed through skin. Do not get in eyes, on skin or on clothing. In case of contact, immediately remove contaminated clothing and wash with soap and water. Wash contaminated clothing before reuse. Causes skin irritation.

Keep container closed when not in use. Use with adequate ventilation. Do not reuse empty container. Destroy it by perforating or crushing. Burn or discard in a safe place. Do not contaminate water by cleaning equipment or disposal of waste.

PAINT CO.

NEW YORK, N.Y. 10038