


1 U.S. GALLON
3.785 LITERS

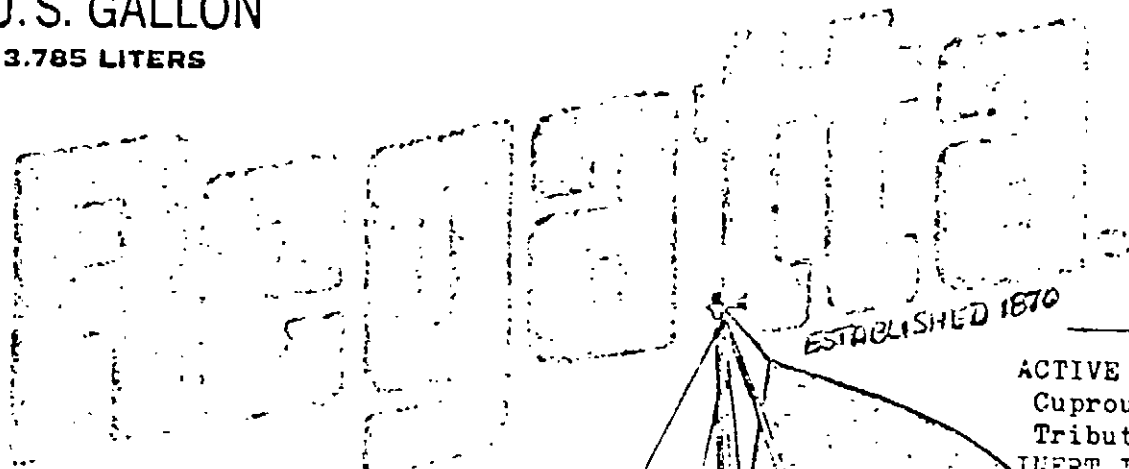

ESTABLISHED 1870

BEST DOCUMENT AVAILABLE

3035 Baltotox Blue
Anti-fouling

ACTIVE INGREDIENTS
Cuprous Oxide (Copper as metal 30.31%)
Tributyltin Fluoride
INERT INGREDIENTS

ANALYSIS
PIGMENT 50.29%
Copper Phthalocyanine Blue (IX-A)
Titanium Dioxide (Type II)
Zinc Oxide
Tributyltin Fluoride
Cuprous Oxide
Inert Pigment
VEHICLE 49.71%
Chlorinated Rubber
Rosin
Tricresyl Phosphate
Aromatic Hydrocarbons
Additives

WARNING: This product is highly toxic. Do not use for other purposes. Keep out of the reach of children.



PUBLISHED 1970

ACTIVE INGREDIENTS

Cuprous Oxide (Copper as metal 30.31%) 33.48%

Tributyltin Fluoride 1.91%

INERT INGREDIENTS

64.61%

100.00%

ANALYSIS

PIGMENT 50.29%

Copper Phthalocyanine Blue (IX-A) 1.45%

Titanium Dioxide (Type II) 7.25%

Zinc Oxide 3.92%

Tributyltin Fluoride 1.91%

Cuprous Oxide 33.48%

Inert Pigment 2.28%

VEHICLE 49.71%

Chlorinated Rubber 8.07%

Rosin 5.87%

Tricresyl Phosphate 2.67%

Aromatic Hydrocarbons 31.43%

Additives 1.61%

100.00%

REGATTA 3802 is a two-part paint for Chlorinated Rubber. It may be used on wood, fiberglass, and metal. It is a type of protective seasonal anti-fouling paint that is easy to apply.

DIRECTIONS

Apply REGATTA 3802 before and during application. Apply at least two coats—allowing 4-6 hours between coats. It is not advisable to delay launch until the second coat is applied. Apply by brush, roller, or spray gun. Ordinarily thinning is not necessary, but where it is desired, add not more than 10% Regatta 3802 Xylol Solvent.

SURFACE PREPARATION

FIBREGLASS: Sand the bottom thoroughly, using medium grit (about #100) paper. Wipe down carefully with REGATTA 3830 Fibreglass Solvent Wash. Use generous quantities of Solvent Wash and clean rags in order to remove the wax-like substance from the fibreglass surface.

An alternate method of surface preparation is to use REGATTA 3840 Fibreglass Pre-Prime Wash and 3851 Fibreglass Fair Sand Primer according to directions, thereby avoiding the necessity of sanding.

WOOD: Apply three coats, but guard directly to bare wood. Allow 4-6 hours between coats.


METAL: Apply one coat of REGATTA Vinyltex 50 51 Wash Primer followed by two coats of REGATTA 3630 3631 Epoxy/Flex Mastic.

PREVIOUSLY COATED SURFACES: Sand thoroughly, then wipe down with 3802 Xylol Solvent.

CAUTION! COMBUSTIBLE! DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COMPOUNDS HARMFUL OR FATAL IF SWALLOWED. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist. Wash thoroughly after handling and before eating or smoking. **KEEP OUT OF REACH OF CHILDREN.** May be absorbed through skin. Do not get in eyes, on skin or on clothing. In case of contact, immediately remove contaminated clothing and wash with soap and water. Wash contaminated clothing before reuse. Causes skin irritation.

Keep container closed when not in use. Use with adequate ventilation. Do not reuse empty container. Destroy, if by perforating or crushing. Burn or discard in a safe place. Do not contaminate water by cleaning equipment or disposal of waste.

BEST DOCUMENT AVAILABLE

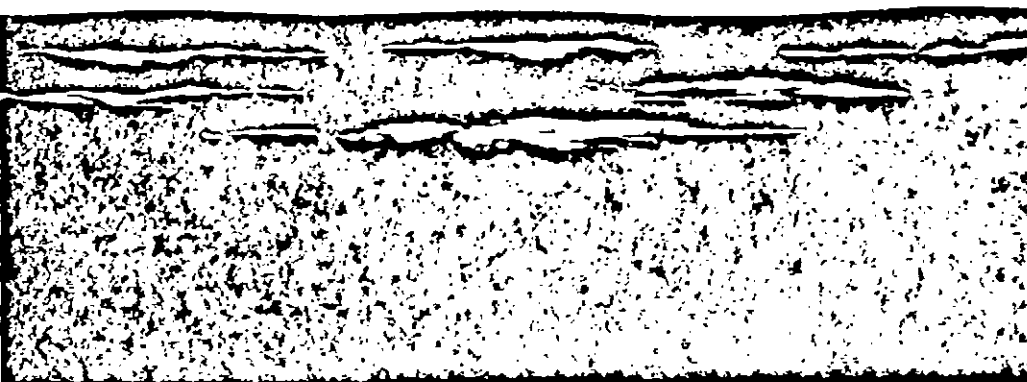


1 U.S. GALLON
3.785 LITERS



3049 Baltoguard Green with TBTF

BEST DOCUMENT AVAILABLE

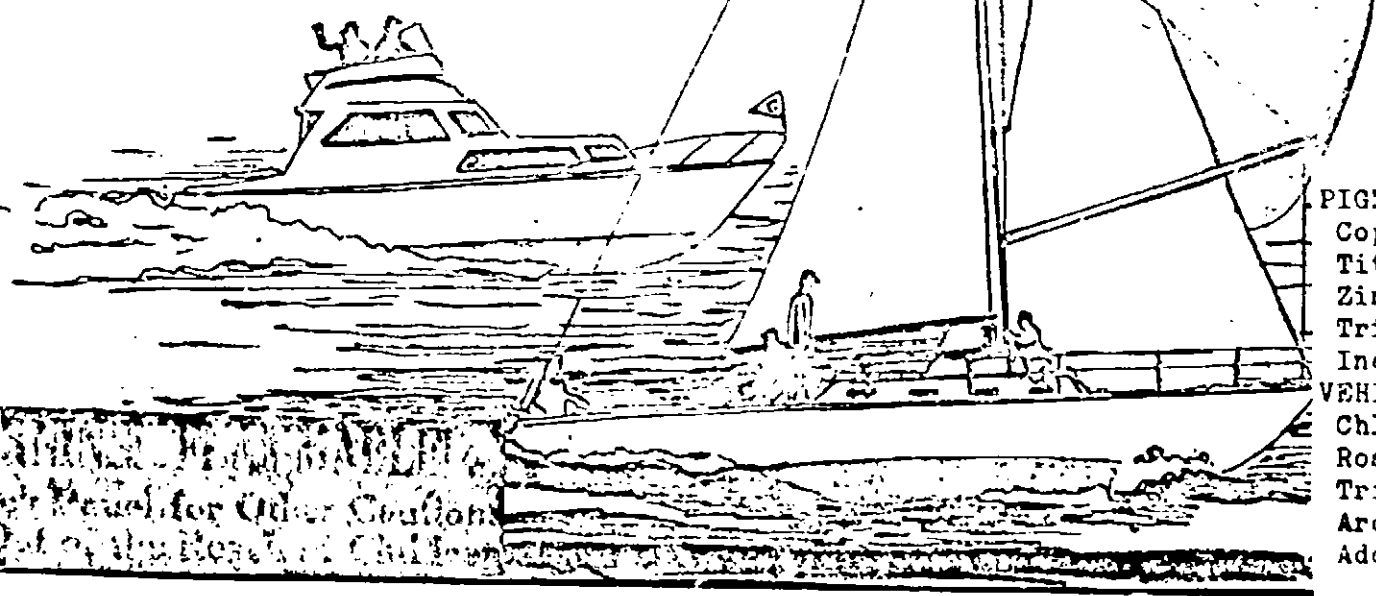

ACTIVE INGREDIENTS
Tributyltin Fluoride
INERT INGREDIENTS

ANALYSIS
PIGMENT 29.36%
Copper Phthalocyanine Green (IX-B)
Titanium Dioxide (Type II)
Zinc Oxide
Tributyltin Fluoride
Inert Pigment
VEHICLE 70.64%
Chlorinated Rubber
Rosin
Tricresyl Phosphate
Aromatic Hydrocarbons
Additives

Keep Out of the Reach of Children