


ESTABLISHED 1870

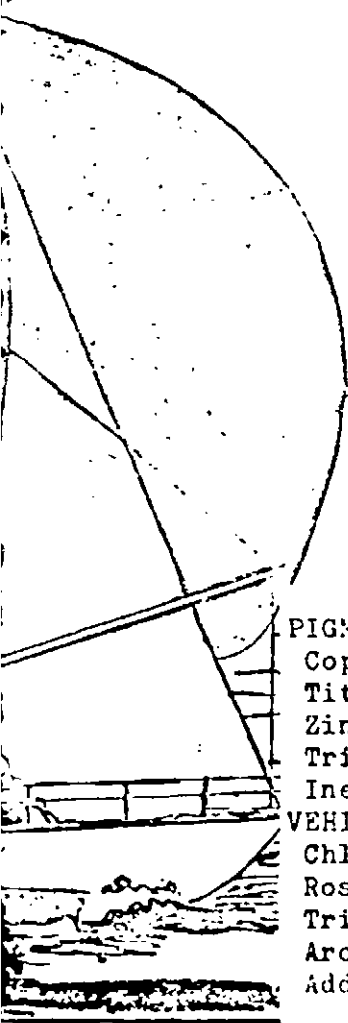

REGATTA

2568-57

Baltoguard is an anti-fouling paint based on Chlorinated Rubber. It may be used on wood, fibreglass, properly primed metal or most types of previous seasons anti-fouling paint that is in good condition.

DIRECTIONS

Stir thoroughly both before and during application. Apply at least two coats—allowing 4 to 6 hours drying time between final coat and launch. It is not advisable to delay launch more than 3 days after final coat. Apply by brush, roller, or spray gun. Ordinarily thinning is not necessary, but where it is desired, add not more than 10% Regatta 3802 Xylol Solvent.

SURFACE PREPARATION

FIBREGLASS: Sand the bottom thoroughly, using medium grit (about #100) paper. Wipe down carefully with REGATTA 3830 Fibreglass Solvent Wash. Use generous quantities of Solvent Wash and clean rags in order to remove the wax-like substance from the fibreglass gel-coat.

An alternate method of surface preparation is to use REGATTA 3840 Fibreglass Pre-Prime Wash and 3851 Fibreglass No Sand Primer according to directions, thereby avoiding the necessity of sanding.

WOOD: Apply three coats of Baltoguard directly to bare wood. Allow 4-6 hours between coats.

METAL: Apply one coat of REGATTA Vinyltex 50 51 Wash Primer followed by two coats of REGATTA 3630 3631 Epoxydur Base Mastic.

PREVIOUSLY COATED SURFACES: Sand thoroughly, then wipe down with 3802 Xylol Solvent.

CAUTION! COMBUSTIBLE! DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COMPOUNDS HARMFUL OR FATAL IF SWALLOWED. Do not apply on any interior surfaces of a dwelling or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist. Wash thoroughly after handling and before eating or smoking. **KEEP OUT OF REACH OF CHILDREN.** May be absorbed through skin. Do not get in eyes, on skin or on clothing. In case of contact, immediately remove contaminated clothing and wash with soap and water. Wash contaminated clothing before reuse. Causes skin irritation.

Keep container closed when not in use. Use with adequate ventilation. Do not reuse empty container. Destroy it by perforating or crushing. Burn or discard in a safe place. Do not contaminate water by cleaning equipment or disposal of waste.

BEST DOCUMENT AVAILABLE

ACTIVE INGREDIENTS

Tributyltin Fluoride	12.56%
INERT INGREDIENTS	87.44%
	<u>100.00%</u>

ANALYSIS

PIGMENT 29.36%	
Copper Phthalocyanine Green (IX-B)	3.09%
Titanium Dioxide (Type II)	7.21%
Zinc Oxide	5.15%
Tributyltin Fluoride	12.56%
Inert Pigment	1.35%
VEHICLE 70.64%	
Chlorinated Rubber	11.47%
Rosin	8.35%
Tricresyl Phosphate	3.79%
Aromatic Hydrocarbons	44.75%
Additives	2.28%
	<u>100.00%</u>



1 U.S. GALLON

3.785 LITERS




3047 Baltoguard Red with TBTF

BEST DOCUMENT AVAILABLE

ACTIVE INGREDIENTS
Tributyltin
INERT INGREDIENTS

BEST DOCUMENT AVAILABLE

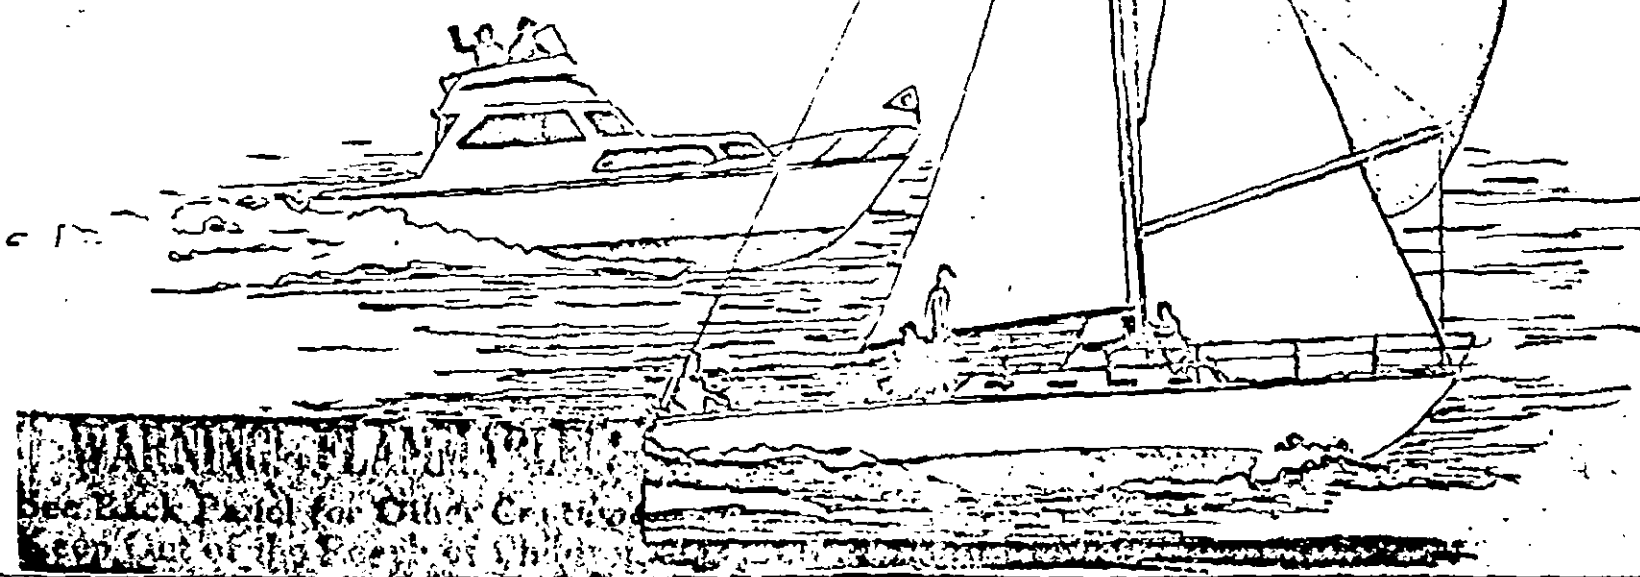

ANALYSIS
PIGMENT 30.12%
B.O.N. Maroon (III-C-8)
Molybdate Orange
Zinc Oxide
Inert Pigment
Tributyltin Fluoride
VEHICLE 69.88%
Chlorinated Rubber
Rosin
Tricresyl Phosphate
Aromatic Hydrocarbons
Additives