


12565-59

ESTABLISHED 1870

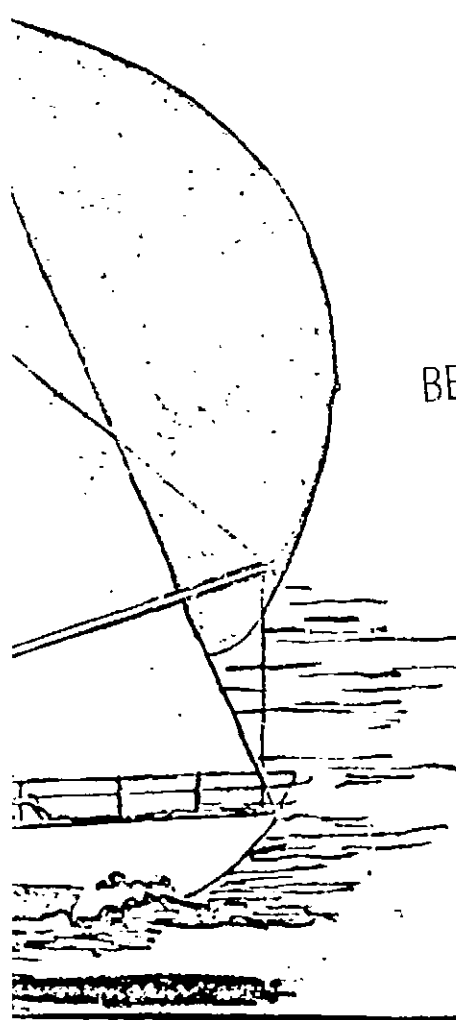

BEST DOCUMENT AVAILABLE

ACTIVE INGREDIENTS	
Tributyltin	12.42%
INERT INGREDIENTS	87.58%
	<u>100.00%</u>

ANALYSIS	
PIGMENT 30.12%	
B.O.N. Maroon (III-C-8)	3.06%
Molybdate Orange	8.20%
Zinc Oxide	5.10%
Inert Pigment	1.34%
Tributyltin Fluoride	12.42%
VEHICLE 69.88%	
Chlorinated Rubber	11.34%
Rosin	8.26%
Tricresyl Phosphate	3.75%
Aromatic Hydrocarbons	44.27%
Additives	2.26%
	<u>100.00%</u>

Baitoguard is an anti-fouling paint based on Chlorinated Rubber. It may be used on wood, fiberglass, properly primed metal or most types of previous seasons anti-fouling paint that is in good condition.

DIRECTIONS

Stir thoroughly both before and during application. Apply at least two coats—allowing 4 to 6 hours drying time between final coat and launch. It is not advisable to delay launch more than 3 days after final coat. Apply by brush, roller, or spray gun. Ordinarily thinning is not necessary, but where it is desired, add not more than 10% Regatta 3802 Xylol Solvent.

SURFACE PREPARATION

FIBREGLASS: Sand the bottom thoroughly, using medium grit (about #100) paper. Wipe down carefully with REGATTA 3630 Fibreglass Solvent Wash. Use generous quantities of Solvent Wash and clean rags in order to remove the wax-like substance from the fibreglass gelcoat.

An alternate method of surface preparation is to use REGATTA 3840 Fibreglass Pre-Prime Wash and 3351 Fibreglass Solvent Primer according to directions, thereby avoiding the necessity of sanding.

WOOD: Apply three coats Baitoguard directly to bare wood. Allow 4-6 hours between coats.

METAL: Apply one coat of REGATTA Wash Primer 50-51 Wash Primer followed by two coats of REGATTA 3630 3631 Epoxycoat Wash Primer.

PREVIOUSLY COATED SURFACES: Sand thoroughly, then wipe down with 3802 Xylol Solvent.

CAUTION! COMBUSTIBLE! DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. CONTAINS COMPOUNDS HARMFUL OR FATAL IF SWALLOWED. Do not apply on any interior surfaces of a dwelling or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist. Wash thoroughly after handling and before eating or smoking. **KEEP OUT OF REACH OF CHILDREN.** May be absorbed through skin. Do not get in eyes, on skin or on clothing. In case of contact, immediately remove contaminated clothing and wash with soap and water. Wash contaminated clothing before reuse. Causes skin irritation.

Keep container closed when not in use. Use with adequate ventilation. Do not reuse empty container. Destroy it by perforating or crushing. Burn or discard in a safe place. Do not contaminate water by cleaning equipment or disposal of waste.



1 U.S. GALLON
3.785 LITERS

ESTABLISHED 1870

3026 Baltotox Green
Anti-Fouling

BEST DOCUMENT AVAILABLE

ACTIVE INGREDIENTS
Cuprous Oxide (Copper as metal 29.35%) 3
Tributyltin Fluoride
INERT INGREDIENTS 6

ANALYSIS
PIGMENT 51.87%
Copper Phthalocyanine Blue (IX-A)
Titanium Dioxide (Type II)
Chrome Yellow
Zinc Oxide
Tributyltin Fluoride
Cuprous Oxide
Inert Pigment
VEHICLE 48.13%
Chlorinated Rubber
Rosin
Tricresyl Phosphate
Aromatic Hydrocarbons
Additives

STAPLING INSTRUCTIONS
See back of box for instructions
Keep Out of Reach of Children