



HEALTH	3
FLAMABILITY	3
ENVIRONMENTAL HAZARD	1
PROTECTIVE EQUIPMENT	X

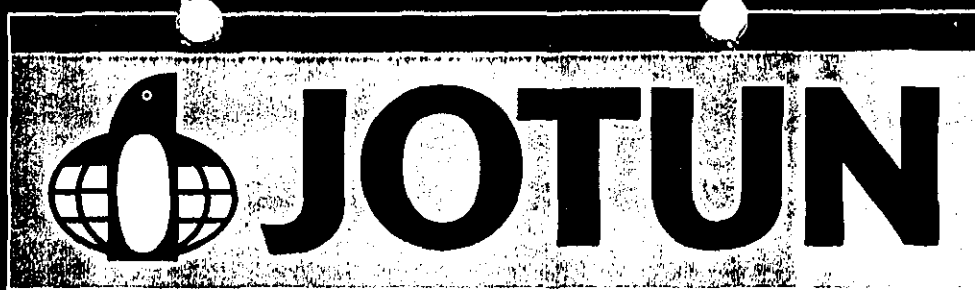

WARNING

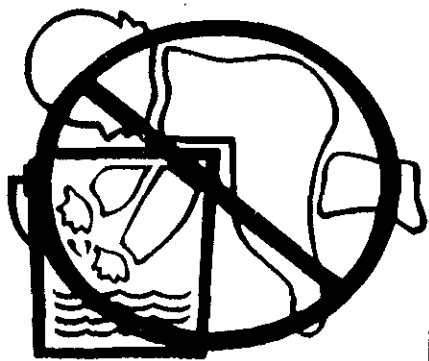

Children can fall into bucket and drown

Keep children away from buckets with even a small amount of water

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

**COASTAL
SUPER SERVICE ANTI-FOULING
59R7
RED**

ACTIVE INGREDIENT: CUPROUS OXIDE.....	47.61%
INERT INGREDIENTS:	52.39%
.....	100.00%

CONTAINS PETROLEUM DISTILLATES

FOR COMMERCIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING.

NOT SOLD FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102.

KEEP OUT OF REACH OF CHILDREN

WARNING! SEE PRECAUTIONS ELSEWHERE ON LABEL (FR-22)

NET CONTENTS 5-GAL. (18.927 LITERS)

2568-92

1/30/2000

Page 183

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS (SR-1)**

WARNING!

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH THE SKIN.

AVOID CONTACT WITH EYES, SKIN AND CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS, AND A HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE VAPORS OR SPRAY MIST. WHEN USED IN ENCLOSED AREAS, SPRAYING PAINT OR SANDING BOAT SURFACES, WEAR APPROPRIATE, PROPERLY FITTED RESPIRATOR (NIOSH/MSHA APPROVED) DURING AND AFTER APPLICATION UNLESS AIR MONITORING DEMONSTRATES VAPOR/MIST LEVELS ARE BELOW APPLICABLE LEVELS.

ENVIRONMENTAL HAZARDS: THIS MATERIAL IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL.

PHYSICAL OR CHEMICAL HAZARDS: FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME. FOLLOW RESPIRATOR MANUFACTURER'S DIRECTIONS FOR USE. REMOVE CONTAMINATED CLOTHING AND WASH BEFORE RE-USE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.

STATEMENT OF PRACTICAL TREATMENT: IF SWALLOWED: DRINK PROMPTLY A LARGE QUANTITY OF MILK, EGG WHITES, GELATIN SOLUTION OR, IF THESE ARE NOT AVAILABLE, DRINK LARGE QUANTITIES OF WATER. AVOID ALCOHOL. GET MEDICAL ATTENTION. IF IN EYES: FLUSH WITH PLENTY OF WATER. GET MEDICAL ATTENTION. IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION. IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH-TO-MOUTH. GET MEDICAL ATTENTION.

DIRECTIONS FOR USE: IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

ANTI-FOULING PAINT FOR METAL BOTTOMS: TO CONTROL THE ATTACHMENT OF MARINE FOULING, IE., BARNACLES, GRASS, ALGAE, ETC., ON STEEL BOTTOMS IN SALT AND BRACKISH WATER WHICH WOULD SUSTAIN SUCH GROWTH. NOT RECOMMENDED FOR USE ON ALUMINUM. A MINIMUM OF TWO COATS IS RECOMMENDED FOR BEST PERFORMANCE.

SURFACE PREPARATION: BEFORE APPLICATION OF ANTI-FOULING, ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, RUST, LOOSE PAINT, SALT RESIDUES, AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTI-CORROSIVE BARRIER COATS.

MIXING: BEFORE USE POWER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.


APPLICATION: APPLY BY BRUSH, ROLL OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95°F.) AIRLESS SPRAY OR REGULAR COLD SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSSHATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.

THINNING: NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER 7-T-33, XYLENE.

DRY TIME: AT 70°F. AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE REFLOATING.

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
D.O.T. HAZARD IDENTIFICATION NUMBER: UN 1263

REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

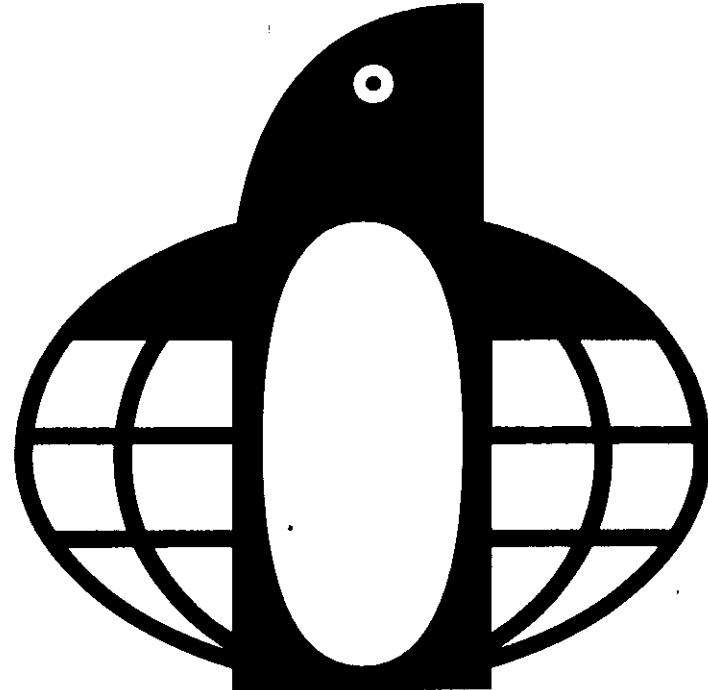

JOTUN

**THE VOC OF THIS PAINT IS 389.5 GRAMS/LITER (3.25 LBS./GAL.)
SR-6 (6-87)**

**59R7
E.P.A. REG. NO. 2568-92
E.P.A. EST. NO. 2568-TX-2**

**JOTUN PAINTS, INC.
1401 SEVERN STREET
BALTIMORE, MARYLAND 21230**

MEDICAL EMERGENCY NUMBER: 1-888-345-5732

343



ACCEPTED

JAN 20 2000

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. *2568-92*

STORAGE AND DISPOSAL

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. KEEP CONTAINER CLOSED WHEN NOT IN USE, IN CASE OF SPILLAGE, ADSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

PESTICIDE DISPOSAL: PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDE, SPRAY MIXTURE OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL: TRIPLE RINSE, (OR EQUIVALENT). THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES.

393