

JOTUN

2568-93

HEALTH	3
FLAMMABILITY	3
REACTIVITY	1
PROTECTIVE EQUIPMENT	X

D.O.T. SHIPPING NAME: PAINT
 D.O.T. HAZARD CLASS: UN1263
 D.O.T. HAZARD IDENTIFICATION NUMBER: FLAMMABLE LIQUID

60A2000
 E.P.A. REG. NO.: 2568-93
 E.P.A. EST. NO.: 002568-LA-001

Jotun Paints, Inc.
 9203 Highway 23
 Belle Chasse, LA 70037

STORAGE AND DISPOSAL

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. KEEP CONTAINER CLOSED WHEN NOT IN USE. IN CASE OF SPILLAGE, ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDE, SPRAY MIXTURE OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL

TRIPLE RINSE (OR EQUIVALENT) THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES.

HYDRO-CLEAN ANTI-FOULING LOW VOC 60A2000 RED

ACTIVE INGREDIENT: CUPROUS OXIDE.....44.59%
 INERT INGREDIENTS:.....55.41%
100.00%

KEEP OUT OF THE REACH OF CHILDREN.

WARNING

CONTAINS PETROLEUM DISTILLATES.

FOR COMMERCIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING.

NOT SOLD FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102.

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

Net 5 Gallons (18.925 Liters)

12-12-2002



1/2

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

WARNING

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH THE SKIN.

AVOID CONTACT WITH EYES, SKIN AND CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS, AND A HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE VAPORS OR SPRAY MIST. WHEN USED IN ENCLOSED AREAS, SPRAYING PAINT OR SANDING BOAT SURFACE, WEAR APPROPRIATE, PROPERLY FITTED RESPIRATOR (NIOSH/MSHA APPROVED) DURING AND AFTER APPLICATION (UNLESS AIR MONITORING DEMONSTRATES VAPOR/MIST LEVELS ARE BELOW APPLICABLE LEVELS).

ENVIRONMENTAL HAZARDS

THIS MATERIAL IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL.

PHYSICAL OR CHEMICAL HAZARDS
DO NOT USE OR STORE NEAR HEAT OR OPEN FLAME.

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: HOLD EYELIDS OPEN AND FLUSH WITH A STEADY, GENTLE STREAM OF WATER FOR 15 MINUTES. GET MEDICAL ATTENTION.
IF SWALLOWED: CALL A DOCTOR OR GET MEDICAL ATTENTION. DO NOT INDUCE VOMITING. DO NOT LIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. AVOID ALCOHOL. IF ON SKIN WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION IF IRRITATION PERSISTS. IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING, GIVE ARTIFICIAL RESPIRATION PREFERABLY MOUTH TO MOUTH. GET MEDICAL ATTENTION.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

ANTIFOULING FOR METAL BOTTOMS:

TO CONTROL THE ATTACHMENT OF MARINE FOULING, IE., BARNACLES, GRASS, ALGAE, ETC. ON STEEL BOTTOMS IN SALT AND BRACKISH WATER WHICH WOULD SUSTAIN SUCH GROWTH. NOT RECOMMENDED FOR USE ON ALUMINUM. A MINIMUM OF TWO COATS IS RECOMMENDED FOR BEST PERFORMANCE.

SURFACE PREPARATION:

BEFORE APPLICATION OF ANTI-FOULING, ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, RUST, LOOSE PAINT, SALT RESIDUES AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTICORROSIVE BARRIER COATS. FOLLOW RESPIRATOR MANUFACTURER'S DIRECTIONS FOR USE. REMOVE CONTAMINATED CLOTHING AND WASH CLOTHING BEFORE RE-USE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, OR USING TOBACCO.

MIXING

BEFORE USE POWER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.

APPLICATION:


APPLY BY BRUSH, ROLL, OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95 F) AIRLESS SPRAY OR REGULAR COLD SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSS HATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.

THINNING:

NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER 7-T-33, XYLENE.

DRYING TIME:


AT 70 F AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE REFLOATING. REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

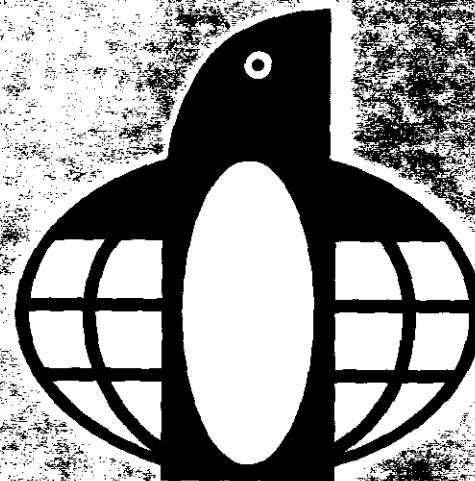

JOTUN

THE VOC OF THIS PAINT IS 330 GRAMS/LITER (2.75 LBS./GAL.).
MEDICAL EMERGENCY NUMBER: 1-800-424-9300

WARNING

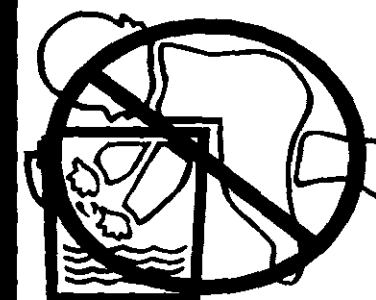

Children can fall into bucket and drown

Keep children away from buckets with even a small amount of water

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

2/2