

2568-93

5/14/2009

1/3



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON D.C., 20460

OFFICE OF
PREVENTION, PESTICIDES AND
TOXIC SUBSTANCES

ST Technical Associates, LLC
c/o for Jotun Paints
5 Rogers Avenue
Milford, CT 06460-6095

MAY 14 2009

Attention: Patricia Turley
Regulatory Manager

Subject: Antifouling Hydroclean Low VOC
EPA Reg. No. 2568-93
Amendment Application Date: February 12, 2009

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. The Agency has no objection to your request to revising your product label. A stamped label is enclosed for your records.

If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510C)

BATCH 51118419 DOM 02/01/2009

Health	3
Fire hazard	3
Reactivity	1
Protective Equipment	C

D.O.T. SHIPPING NAME: PAINT


D.O.T. HAZARD CLASS: FLAMMABLE LIQUID

D.O.T. HAZARD IDENTIFICATION NUMBER: UN1263

60A2000

**E.P.A. REG. NO.: 2568-93
E.P.A. EST. NO.: 002533-LA-001**

**Join Paints, Inc.
9203 Highway 23
Belle Chasse, LA 70037**

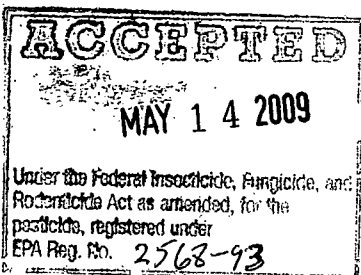

STORAGE AND DISPOSAL

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. KEEP CONTAINER CLOSED WHEN NOT IN USE. IN CASE OF SPILLAGE, ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDE, SPRAY MIXTURE OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

**CONTAINER DISPOSAL
NONREFILLABLE CONTAINER**

DO NOT REUSE OR REFILL THIS CONTAINER. OFFER FOR RECYCLING IF AVAILABLE. TRIPLE RINSE CONTAINER PROMPTLY AFTER EMPTYING. TRIPLE RINSE AS FOLLOWS: EMPTY THE REMAINING CONTENTS INTO APPLICATION EQUIPMENT OR A MIX TANK AND DRAIN FOR 10 SECONDS AFTER THE FLOW BEGINS TO DRIP. FILL THE CONTAINER 1/10TH FULL WITH THINNER AND RECAP. SHAKE FOR 10 SECONDS. POUR RINSATE INTO APPLICATION EQUIPMENT OR A MIX TANK OR STORE RINSATE FOR LATER USE OR RECYCLING. DRAIN FOR 10 SECONDS AFTER THE FLOW BEGINS TO DRIP. REPEAT THIS PROCEDURE TWO MORE TIMES. THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES.

**ANTI-FOULING
HYDROCLEAN LOW VOC
RED
60A2000**

ACTIVE INGREDIENT: CUPROUS OXIDE.....	44.59%*
INERT INGREDIENTS.....	55.41%**
	100.00%

* METALLIC COPPER EQUIVALENT: 39.60%

**CONTAINS PETROLEUM DISTILLATES, XYLENE, OR XYLENE RANGE AROMATIC SOLVENTS

KEEP OUT OF THE REACH OF CHILDREN.

WARNING

FOR COMMERCIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING.

NOT SOLD FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102

SEE SIDE PANEL FOR FIRST AID AND ADDITIONAL PRECAUTIONARY STATEMENTS

Net 20 LITERS (5.28 GALLONS)

W/2

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

WARNING

CAUSES EYE IRRITATION.
HARMFUL IF ABSORBED THROUGH SKIN.

AVOID CONTACT WITH EYES, SKIN AND CLOTHING. WEAR PROTECTIVE CLOTHING, SLEEVED COTTON SHIRT, LONG PANTS, AND HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE VAPORS OR SPRAY MIST. WHEN USED IN ENCLOSED AREAS, SPRAYING PAINT OR SANDING BOAT SURFACE. WEAR APPROPRIATE PROPERLY FITTED RESPIRATOR (NIOSH/MSHA APPROVED) DURING AND AFTER APPLICATION UNLESS AIR MONITORING DEMONSTRATES VAPOR/MIST LEVELS ARE BELOW APPLICABLE LEVELS.


REMOVE AND WASH CONTAMINATED CLOTHING BEFORE REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, CHEWING GUM, USING TOBACCO OR USING THE WASHROOM.

ENVIRONMENTAL HAZARDS

THIS MATERIAL IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL.

PHYSICAL OR CHEMICAL HAZARDS

COMBUSTIBLE. DO NOT USE OR STORE NEAR HEAT OR OPEN FLAME.

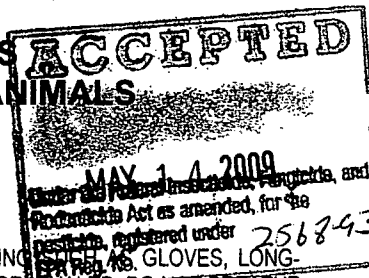

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

ANTIFOULING FOR METAL BOTTOMS

TO CONTROL THE ATTACHMENT OF MARINE FOULING, IE., BARNACLES, GRASS, ALGAE, TUBE WORMS, MUSSELS, AND SNAILS ON HULLS OF BOATS AND VESSELS IN SALT, BRACKISH AND FRESH WATER WHICH WOULD SUSTAIN SUCH GROWTH. NOT RECOMMENDED FOR USE ON ALUMINUM. A MINIMUM OF TWO COATS OF THIS PRODUCT IS RECOMMENDED FOR BEST PERFORMANCE.

SURFACE PREPARATION

BEFORE APPLICATION OF ANTIFOULING, ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, RUST, LOOSE PAINT, SALT RESIDUES AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTI-CORROSIVE BARRIER COATS.

MIXING

BEFORE USE, POWER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.

APPLICATION

APPLY BY BRUSH, ROLL, OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95°F) AIRLESS SPRAY OR REGULAR COLD SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSSHATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.

THINNING

NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER 7-T-33, XYLENE.

DRYING TIME

AT 70°F AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE IMMERSION.

REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

**THE VOC OF THIS PAINT IS
330 GRAMS/LITER (2.75 LBS/GAL).**

FIRST AID	
IF IN EYES:	HOLD EYES OPEN AND RINSE SLOWLY AND GENTLY FOR 15-20 MINUTES. REMOVE CONTACT LENSES, IF PRESENT, AFTER THE FIRST 5 MINUTES, AND THEN CONTINUE RINSING. CALL A POISON CONTROL CENTER OR DOCTOR FOR TREATMENT ADVICE.
IF SWALLOWED:	IMMEDIATELY CALL A POISON CONTROL CENTER OR DOCTOR. DO NOT INDUCE VOMITING UNLESS TOLD TO DO SO BY A POISON CONTROL CENTER OR DOCTOR. DO NOT GIVE ANY LIQUID TO THE PERSON. DO NOT GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.
IF ON SKIN OR CLOTHING:	TAKE OFF CONTAMINATED CLOTHING. RINSE SKIN IMMEDIATELY WITH PLENTY OF WATER FOR 15-20 MINUTES. CALL A POISON CONTROL CENTER OR DOCTOR FOR TREATMENT ADVICE.
IF INHALED:	MOVE PERSON TO FRESH AIR. IF PERSON IS NOT BREATHING, CALL 911 OR AN AMBULANCE, THEN GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH-TO-MOUTH IF POSSIBLE. CALL A POISON CONTROL CENTER OR DOCTOR FOR FURTHER TREATMENT ADVICE.
OTHER:	HAVE THE PRODUCT CONTAINER OR LABEL WITH YOU WHEN CALLING A POISON CONTROL CENTER OR DOCTOR, OR GOING FOR TREATMENT.
MEDICAL EMERGENCY NUMBER: 1-800-424-9300	
NOTE TO PHYSICIAN Contains petroleum distillate - vomiting may cause aspiration pneumonia.	

3/2