


HEALTH	2
FLAMABILITY	3
	1
PROTECTIVE EQUIPMENT	X



JOTUN

WARNING

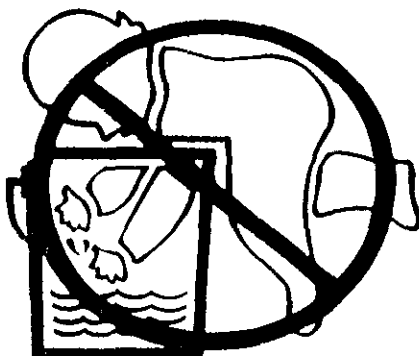

Children can fall into bucket and drown

Keep children away from buckets with even a small amount of water

Ninos pueden caer adentro de el balde y ahogarse
 Retire los ninos de los baldes, aunque solamente tengan un poco agua

RESTRICTED USE PESTICIDE

DUE TO TOXICITY TO AQUATIC ORGANISMS, INCLUDING SHELLFISH, FOR SALE ONLY TO CERTIFIED COMMERCIAL APPLICATORS AND FOR USE ONLY BY CERTIFIED COMMERCIAL APPLICATORS, OR BY PERSONS UNDER THE DIRECT SUPERVISION OF AN ON-SITE (AT THE WORK SITE) CERTIFIED COMMERCIAL APPLICATOR.

SEAMATE HB 33 ANTI-FOULING 65A2000 RED

ACTIVE INGREDIENT: TRIBUTYL TIN METHACRYLATE (AS PART OF POLYMER)	11.52%
ACTIVE INGREDIENT: CUPROUS OXIDE	34.05%
INERT INGREDIENT:	54.43%
	100.00%
TOTAL TIN CONTENT:	4.08%

CONTAINS PETROLEUM DISTILLATES

KEEP OUT OF REACH OF CHILDREN

DANGER

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NET CONTENTS 5-GAL. (18.927 LITERS)

2568-94

160/2000

page 183

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS & DOMESTIC ANIMALS

DANGER!

CORROSIVE. CAUSES SKIN BURNS. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS, AND A HAT. CAUSES EYE IRRITATION. MAY BE FATAL IF SWALLOWED. HARMFUL IF ABSORBED THROUGH THE SKIN OR INHALED. THIS PRODUCT MAY BE A DERMAL SENSITIZER. AVOID CONTACT WITH SKIN, EYES, OR CLOTHING. AVOID BREATHING VAPOR, SPRAY MIST, DUST OR CHIPS FROM SANDING. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING OR SMOKING. USE WITH ADEQUATE VENTILATION.

WHILE SPRAYING PAINT OR SANDING BOAT SURFACE, WEAR A RESPIRATOR JOINTLY APPROVED BY THE MINING ENFORCEMENT AND SAFETY ADMINISTRATION AND THE NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH.

PHYSICAL OR CHEMICAL HAZARDS: FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

DIRECTIONS FOR USE: IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING. IT IS UNLAWFUL TO USE THIS PRODUCT ON NON-ALUMINUM HULLED VESSELS LESS THAN 82 FEET (25 METERS) IN LENGTH (ON DECK), EXCEPT FOR THE OUTBOARD MOTOR OR LOWER DRIVE UNIT OF SUCH VESSEL.

USERS MUST COMPLY WITH ALL APPLICABLE OSHA REQUIREMENTS.

SEAMATE HB33 IS AN ANTI-FOULING PAINT OF THE SELF POLISHING VARIETY. IT MAY BE APPLIED BY BRUSH, ROLLER OR SPRAY TO STEEL VESSELS OPERATING IN FRESH AND/OR SALT WATER AND SUBJECT TO ATTACK BY BARNACLES, ALGAE, TUBE WORMS AND OTHER FOULING ORGANISMS.

SURFACE PREPARATION: CLEAN SURFACE THOROUGHLY OF GREASE, OIL, LOOSE PAINT, DIRT, MILDEW, RUST, SCALE OR ANY OTHER FOREIGN MATERIAL.

FOR INDUSTRIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING. NOT FOR RESIDENTIAL USE. NOT SOLD FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102

THE VOC OF THIS PAINT IS 388 GRAMS/LITER (3.24 LBS./GAL.)

65A2000

E.P.A. REG. NO. 2568-94

E.P.A. EST. NO. 2568-TX-2

JOTUN PAINTS, INC.
1401 SEVERN STREET
BALTIMORE, MARYLAND 21230

STATEMENT OF PRACTICAL TREATMENT: IF SWALLOWED, DRINK PROMPTLY A LARGE QUANTITY OF WATER. AVOID ALCOHOL. GET MEDICAL ATTENTION. IF IN EYES: FLUSH WITH PLENTY OF WATER. GET MEDICAL ATTENTION. IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION IF IRRITATION PERSISTS. IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING GIVE ARTIFICIAL RESPIRATION, PREFERABLE MOUTH-TO-MOUTH. GET MEDICAL ATTENTION.

NOTE TO PHYSICIAN: PROBABLE MUCOSAL DAMAGE MAY CONTRAINDICATE THE USE OF GASTRIC LAVAGE.

ENVIRONMENTAL HAZARDS: THIS PESTICIDE IS TOXIC TO AQUATIC ORGANISMS INCLUDING FISH AND SHELLFISH. DO NOT APPLY DIRECTLY TO WATER. DO NOT ALLOW CHIPS AND DUST, GENERATED DURING PAINT REMOVAL TO ENTER WATER.

PRIMING: A JOTUN PRIMER MUST BE APPLIED TO BARE NEWLY SANDBLASTED, OR POROUS SURFACES BEFORE PAINTING.

ALWAYS APPLY PAINT TO A DRY SURFACE.


STIR PAINT THOROUGHLY FROM THE BOTTOM.

"FOR FURTHER USE AND DIRECTIONS, SEE THE TECHNICAL DATA BULLETIN."

IMPORTANT: IF IT IS NECESSARY TO PAINT UNDER UNUSUAL CONDITIONS, CALL YOUR JOTUN REPRESENTATIVE FOR TECHNICAL SERVICE.

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: FLAMMABLE LIQUID
D.O.T. HAZARD IDENTIFICATION NUMBER: UN 1263

2
3

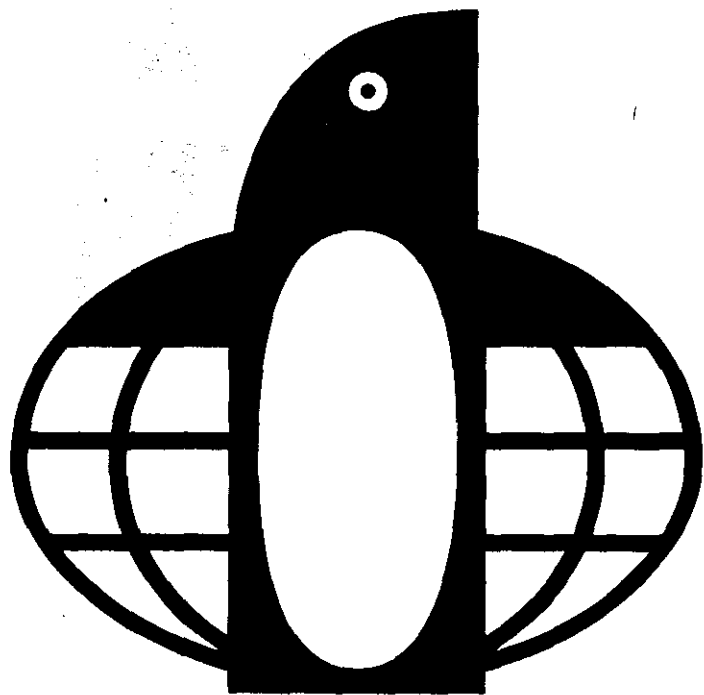

JOTUN

ACCEPTED
JAN 20 2000
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 2568-94

STORAGE AND DISPOSAL

STORAGE: KEEP CONTAINER CLOSED WHEN NOT IN USE. IN CASE OF SPILLAGE, ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

PESTICIDE DISPOSAL:

1.) PAINT CHIPS, SPENT ABRASIVES, AND ANY OTHER WASTE MATERIALS FROM REMOVAL OF OLD PAINT MUST BE DISPOSED OF IN A SANITARY LANDFILL (OR IF REQUIRED BY FEDERAL, STATE OR LOCAL REGULATIONS, HANDLED AS A HAZARDOUS WASTE).

2.) IF POSSIBLE, USE ALL OF THE CONTENTS BY APPLICATION ACCORDING TO LABEL INSTRUCTIONS. MANAGE EXCESS PAINT, RINSATE, AND OTHER APPLICATION WSTES IN ACCORDANCE WITH FEDERAL, STATE, AND LOCAL REQUIREMENTS. CONSULT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, NEAREST EPA REGIONAL OFFICE, OR THE RCRA/SUPERFUND HOTLINE (800) 424-9346 FOR WASTE DISPOSAL GUIDANCE.

CONTAINER DISPOSAL: TRIPLE RINSE CONTAINER IF INTENDED FOR RECYCLING OR RECONDITIONING. EMPTY PAINT CONTAINERS WITH SMALL AMOUNTS OF DRIED RESIDUE MUST BE DISPOSED OF IN A SANITARY LANDFILL (OR IF REQUIRED BY FEDERAL, STATE, OR LOCAL REGULATIONS, HANDLED AS A HAZARDOUS WASTE).

MEDICAL EMERGENCY NUMBER: 1-888-345-5732

3
2
3