

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

MAY 17 2001

Jotun Paints, Inc.
9203 Highway 23
Belle Chasse, LA 70037

Attention: Carol Rosler
Regulatory Manager

Subject: Sea Prince Antifouling Red 60A3000 RED
EPA Registration No. 2568-98
Amendment Dated April 6, 2001

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, to change your product name, is acceptable, provided that you make the following labeling changes listed below.

1. As per PR Notice 2001-1, the heading "Statement of Practical Treatment" must be changed to "First Aid" and the statements must be revised as follows:

IF IN EYES:

Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.

IF SWALLOWED:

Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to by a poison control center or doctor.

IF ON SKIN:

Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment.

CONCURRENCES

SYMBOL								
SURNAME								
DATE								

IF INHALED:

Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment.

2. The Agency has adjusted our records to reflect the following product name change:


OLD: Seavictor 40 Anti-Fouling 60A3000 RED

NEW: Sea Prince Antifouling Red 60A3000 RED

Submit two (2) copies of the final printed labeling for our review. A stamped copy of the labeling is enclosed for your records.


If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely

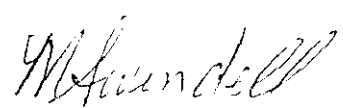

Marshall Swindell
Product Manager 33
Regulatory Management Branch 1
Antimicrobial Division (7510C)

Enclosure



JOTUN

HEALTH **3**
 FLAMMABILITY **3**
 1
 PROTECTIVE EQUIPMENT **X**

D.O.T. SHIPPING NAME: **PAINT**
 D.O.T. HAZARD CLASS: **UN1263**
 D.O.T HAZARD IDENTIFICATION NUMBER: **FLAMMABLE LIQUID**
60A3000
 E.P.A. REG. NO.: **2568-98**
 E.P.A. EST. NO.: **002568-LA-001**

STORAGE AND DISPOSAL

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. KEEP CONTAINER CLOSED WHEN NOT IN USE. IN CASE OF SPILLAGE, ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDE SPRAY MIXTURE OR RINSE-OFF IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DEPLETED BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL

TRIPLE RINSE (OR EQUIVALENT) THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES.

Jotun Paints, Inc.
 9203 Highway 23
 Belle Chasse, LA 70037

ACCEPTED with COMMENTS in EPA Letter Dated: MAY 17 2001

SEA PRINCE ANTI FOULING RED 60A3000 RED

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. **2568-98**

ACTIVE INGREDIENT: COPROUS OXIDE	31.90%
INERT INGREDIENTS	68.10%
	100.00%

KEEP OUT OF THE REACH OF CHILDREN.

WARNING

CONTAINS PETROLEUM DISTILLATES. FOR COMMERCIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING.

NOT SOLD FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102.

WARNING! SEE PRECAUTIONS ELSEWHERE ON LABEL (FR-22).

Net 5 Gallons (18.925 Liters)



**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

WARNING

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH THE SKIN.

AVOID CONTACT WITH EYES, SKIN AND CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS, AND A HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE VAPORS OR SPRAY MIST. WHEN USED IN ENCLOSED AREAS, SPRAYING PAINT OR SANDING BOAT SURFACE. WEAR APPROPRIATE, PROPERLY FITTED RESPIRATOR (NIOSH/MSHA APPROVED) DURING AND AFTER APPLICATION UNLESS AIR MONITORING DEMONSTRATES VAPOR/MIST LEVELS ARE BELOW APPLICABLE LEVELS.

ENVIRONMENTAL HAZARDS

THIS MATERIAL IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST OF MATERIAL DURING PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED, DRINK PROMPTLY A LARGE QUANTITY OF MILK, EGG WHITES, GELATIN SOLUTION OR, IF THESE ARE NOT AVAILABLE, DRINK LARGE QUANTITIES OF WATER. AVOID ALCOHOL. GET MEDICAL ATTENTION. IF IN EYES: FLUSH WITH PLENTY OF WATER. GET MEDICAL ATTENTION. IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION. IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH-TO-MOUTH. GET MEDICAL ATTENTION.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

ANTIFOULING FOR METAL BOTTOMS:

TO CONTROL THE ATTACHMENT OF MARINE FOULING, IE. BARNACLES, GRASS, ALGAE, ETC. ON STEEL BOTTOMS IN SALT AND BRACKISH WATER WHICH WOULD SUSTAIN SUCH GROWTH. NOT RECOMMENDED FOR USE ON ALUMINUM. A MINIMUM OF TWO COATS IS RECOMMENDED FOR BEST PERFORMANCE.

SURFACE PREPARATION:

BEFORE APPLICATION OF ANTI-FOULING, ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, RUST, LOOSE PAINT, SALT RESIDUES AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTI-CORROSIVE BARRIER COATS. FOLLOW RESPIRATOR MANUFACTURER'S DIRECTIONS FOR USE. REMOVE CONTAMINATED CLOTHING AND WASH CLOTHING BEFORE RE-USE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, OR USING TOBACCO.

MIXING

BEFORE USE, POWDER MIX OR DOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.

APPLICATION:

APPLY BY BRUSH, ROLL, OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95 F) AIRLESS SPRAY OR REGULAR GOLF SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSS HATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.


THINNING:

NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER 7-T-33, XYLENE.

DRYING TIME:

AT 70 F AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE REFLOATING.

REFER TO PRODUCT MATERIAL SAFETY DATA SHEET, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

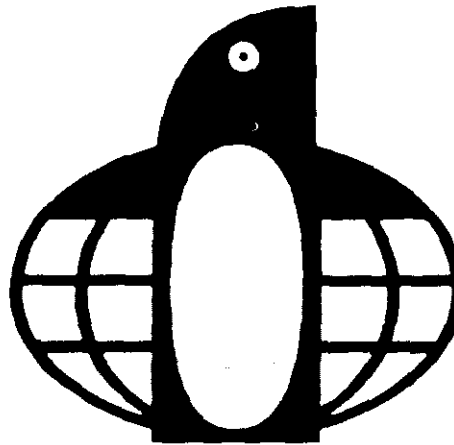

JOTUN

60A3000

WARNING

Children can fall into bucket and drown.
Keep children away from buckets with even a small amount of water.

Niños pueden caer dentro de un balde y ahogarse.
Retire los niños de los baldes aunque tengan poca agua.

THE VOC OF THIS PAINT IS 392 GRAMS/LITER (3.27 LBS./GAL.).

MEDICAL EMERGENCY NUMBER: 1-800-424-9300

7/7