

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

DANGER

**CAUSES EYE IRRITATION. HARMFUL
IF ABSORBED THROUGH THE SKIN.**

UNPROTECTED PERSONS SHOULD BE KEPT OUT OF THE TREATMENT AREAS WITHIN A DISTANCE OF 100 FEET. DO NOT GET IN EYES, ON SKIN, OR ON CLOTHING. AVOID CONTACT WITH SKIN. WEAR A FULL FACE SHIELD. AVOID BREATHING VAPOR, MIST, DUST OR CHIPS FROM PAINTING OR SANDING. WHILE SPRAYING PAINT OR SANDING BOAT SURFACE, WEAR A SUPPLIED-AIR OR POWDERED AIR PURIFYING RESPIRATOR (PAPR) APPROVED BY NIOSH FOR USE WITH PAINTS AND COATINGS.

WEAR A TYVEK HOODED COVERALL OR THE EXACT EQUIVALENT, COVERALLS BENEATH THE TYVEK HOODED COVERALLS, IMPERVIOUS GLOVES AND IMPERVIOUS FOOTWEAR THAT PROTECTS THE LOWER LEG. REMOVE CONTAMINATED CLOTHING AND DISCARD AFTER EACH USE. DO NOT REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING OR SMOKING.

ENVIRONMENTAL HAZARDS

THIS PESTICIDE IS TOXIC TO FISH AND AQUATIC INVERTEBRATES. DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT INTO LAKES, STREAMS, PONDS, ESTUARIES, OCEANS OR OTHER WATER UNLESS IN ACCORDANCE WITH THE REQUIREMENTS OF A NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT AND THE PERMITTING AUTHORITY HAS BEEN NOTIFIED IN WRITING PRIOR TO DISCHARGE. DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT TO SEWER SYSTEMS WITHOUT PREVIOUSLY NOTIFYING THE LOCAL SEWAGE TREATMENT PLANT AUTHORITY. FOR GUIDANCE CONTACT YOUR STATE WATER BOARD OR REGIONAL OFFICES OF THE EPA. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTE. DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL. WEAR PROTECTIVE CLOTHING AND SUPPLIED AIR RESPIRATOR IN ACCORDANCE WITH THE PRECAUTIONARY STATEMENTS ABOVE WHEN HANDLING, PAINTING OR REMOVING THIS PAINT.

PHYSICAL OR CHEMICAL HAZARDS
FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

FIRST AID

IF IN EYES: HOLD EYELIDS OPEN AND FLUSH WITH A STEADY GENTLE STREAM OF WATER FOR 15 MINUTES. REMOVE CONTACT LENSES, IF PRESENT, AFTER THE FIRST 5 MINUTES. THEN CONTINUE RINSING. CALL A POISON CONTROL CENTER OR DOCTOR FOR TREATMENT ADVICE.

IF ON SKIN: TAKE OFF CONTAMINATED CLOTHING. RINSE SKIN IMMEDIATELY WITH PLENTY OF WATER FOR 15-20 MINUTES. CALL A POISON CONTROL CENTER OR A DOCTOR FOR TREATMENT.

IF INHALED: REMOVE PERSON TO FRESH AIR. IF PERSON IS NOT BREATHING, GIVE ARTIFICIAL RESPIRATION. THEN CALL 911 OR AN AMBULANCE.

IF SWALLOWED: CALL A DOCTOR OR A POISON CONTROL CENTER. DRINK 1 OR 2 GLASSES OF WATER AND INDUCE VOMITING BY TOUCHING THE BACK OF THROAT WITH FINGER. IF A PERSON IS UNCONSCIOUS, DO NOT GIVE ANYTHING BY MOUTH AND DO NOT INDUCE VOMITING.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

**ANTIFOULING FOR METAL
BOTTOMS:**

TO CONTROL THE ATTACHMENT OF MARINE ANTI-FOULING, I.E. BARNACLES, GRASS, ALGAE, TUBE WORMS, MUSSELS, AND SNAILS, ON HULLS OF BOATS AND VESSELS IN SALT, BRACKISH AND FRESH WATER WHICH WOULD SUSTAIN SUCH GROWTH. WHEN USED ON ALUMINUM HULLS A BARRIER COAT OF TWO COATS OF EPOXY COATING ATTAINING AT LEAST 12 MILS DFT MUST BE APPLIED FIRST. CONSULT WITH YOUR REPRESENTATIVE FOR SPECIFIC BARRIER RECOMMENDATIONS. A MINIMUM OF TWO COATS OF THIS PRODUCT IS RECOMMENDED FOR BEST PERFORMANCE. THIS PRODUCT IS NOT FOR USE ON PLEASURE CRAFTS OR USE IN MARINAS.

SURFACE PREPARATION:

BEFORE APPLICATION OF ANTIFOULING ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, RUST, LOOSE PAINT, SALT RESIDUES AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTICORROSIVE BARRIER COATS. FOLLOW RESPIRATOR MANUFACTURER'S DIRECTIONS FOR USE. REMOVE CONTAMINATED CLOTHING AND WASH CLOTHING BEFORE RE-USE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, OR USING TOBACCO.

MIXING:

BEFORE USE, POWDER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.

APPLICATION:

APPLY BY BRUSH, ROLL, OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 85 F) AIRLESS SPRAY OR REGULAR COLD SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSS HATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.


THINNING:

NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER NO. 7 XYLENE.

DRYING TIME:

AT 70 F AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE IMMERSION.


REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

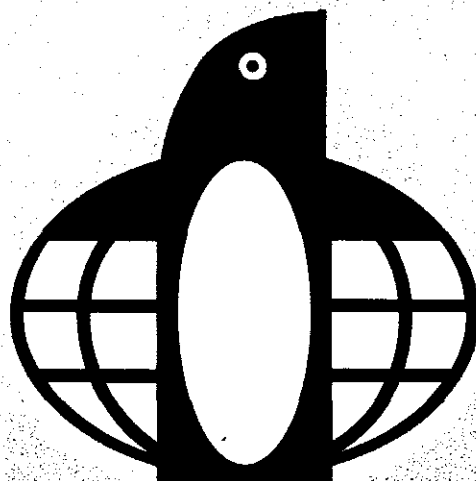

JOTUN

**VOC OF THIS PRODUCT IS 396
GRAMS/LITER (3.3 LBS/GAL).**

MEDICAL EMERGENCY NUMBER: 1-800-424-9300

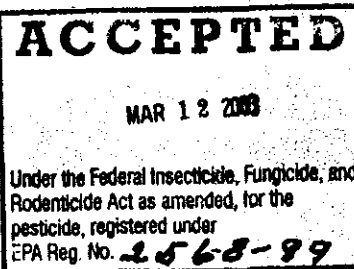


Children can fall into bucket and drown

Keep children away from buckets with even a small amount of water

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

2568-99 3/12/2003 Page 1 of 2



JOTUN

HEALTH	3
FLAMMABILITY	3
1	
PROTECTIVE EQUIPMENT	X

D.O.T. SHIPPING NAME: PAINT
D.O.T. HAZARD CLASS: UN 1263

D.O.T. HAZARD IDENTIFICATION NUMBER: FLAMMABLE LIQUID

60A5000

E.P.A. REG. NO.: 2568-99
E.P.A. EST. NO.: 002568-LA-001

Jotun Paints, Inc.
9203 Highway 23
Belle Chasse, LA 70037

STORAGE AND DISPOSAL

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. KEEP CONTAINER CLOSED WHEN NOT IN USE. IN CASE OF SPILLAGE, ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDE, SPRAY MIXTURE OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USER ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL

TRIPLE RINSE (OR EQUIVALENT) THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES.

SEAVICTOR 50 ANTIFOULING 60A5000 RED

ACTIVE INGREDIENT: CUPROUS OXIDE.....	39.59%
ACTIVE INGREDIENT: 4,5-Dichloro-2-n-octyl-3 (2H)-isothiazolone.....	2.19%
*INERT INGREDIENTS:	58.22%
.....100.00%	

CONTAINS PETROLEUM DISTILLATES.

KEEP OUT OF THE REACH OF CHILDREN.

DANGER

FOR COMMERCIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING.

DO NOT SELL FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102

DANGER! SEE FIRST AID AND OTHER PRECAUTIONS ON SIDE PANEL

Net 5 Gallons (18.925 Liters)

