
 <p>U.S. ENVIRONMENTAL PROTECTION AGENCY Office of Pesticide Programs Antimicrobials Division (7510C) 1200 Pennsylvania Avenue, N.W. Washington, D.C. 20460</p> <p><b>NOTICE OF PESTICIDE:</b> <input checked="" type="checkbox"/> Registration <input type="checkbox"/> Re-registration</p> <p>(under FIFRA, as amended)</p>	EPA Reg. Number: 2568-99	Date of Issuance: <b>MAY 31 2005</b>
	Term of Issuance: <b>CONDITIONAL</b> <b>Expires on December 31st, 2006</b>	
	Name of Pesticide Product: <b>Jotun Marine Coatings 60A5000 Seavictor 50 Antifouling Red</b>	
Name and Address of Registrant (include ZIP code): <b>Jotun Paints, Inc. 9203 Highway 23 Belle Chasse, LA 70037</b>		
<b>Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.</b>		
On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended.		
Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.		
This product is conditionally registered in accordance with FIFRA Section 3(c)(7)(A) provided that you:		
<ol style="list-style-type: none"> <li>1. Submit and/or cite all data required for registration of your product under FIFRA Section 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA Section 4, or as required by registration review under FIFRA Section 3(g).</li> <li>2. Make the following labeling changes: <ol style="list-style-type: none"> <li>a. Revise the EPA Registration Number to read, EPA Reg. No. 2568-99.</li> <li>b. Place the appropriate EPA Establishment No. on the product labeling.</li> </ol> </li> </ol>		
Signature of Approving Official:  Marshall Swindell, Product Manager, Team 33, Regulatory Management Branch I, Antimicrobials Division	Date: <b>MAY 31 2005</b>	

284

3. Submit the protocol and study by **June 1<sup>st</sup>, 2005**, of this date stamped of this Notice of Conditional Registration:

**Inhalation Monitoring Study\***

\*(Intent: Measure airborne concentrations of Sea-Nine 211 during ship painting operations with a representative marine antifoulant (MAF) paint. Prior to initiating the monitoring study submit the study Design for Agency review to ensure compliance with Agency Methodologies for conducting such studies. Also, note that this study is intended to support only the presence of 3% active ingredient in end-use paint formulations).

The data being required as a condition of the registration must be submitted, reviewed, and found to be acceptable by **June 1<sup>st</sup>, 2005**. As you are aware, the manufacturer of the active in generating the data to support all end-use products.

This conditional registration will expire on **December 31<sup>st</sup>, 2006**. If you fail to satisfy the conditions imposed on the registration, EPA may issue a Notice of Registration to cancel under Section 6(e) of FIFRA.


4. Submit two copies of the revised final printed labeling before you release the product for shipment.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA Section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the accepted label is enclosed for your records.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at 703-308-6237.

Sincerely,



Marshall Swindell  
Product Manager 33  
Regulatory Management Branch I  
Antimicrobial Division(7510C)

Enclosure



# JOTUN

HEALTH **3**

FLAMMABILITY **3**

REACTIVITY **1**

PROTECTIVE EQUIPMENT **X**

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL

CONTAINER DISPOSAL

### STORAGE AND DISPOSAL

DO NOT STORE IN UNLabeled Containers

DO NOT STORE IN UNLabeled Containers

DO NOT STORE IN UNLabeled Containers

### PESTICIDE DISPOSAL

DO NOT DISPOSE OF THIS PRODUCT IN SEWER, DRAIN, OR WATERWAY

DO NOT DISPOSE OF THIS PRODUCT IN SEWER, DRAIN, OR WATERWAY

DO NOT DISPOSE OF THIS PRODUCT IN SEWER, DRAIN, OR WATERWAY

### CONTAINER DISPOSAL

DO NOT REUSE OR REFILL THIS CONTAINER

DO NOT REUSE OR REFILL THIS CONTAINER

DO NOT REUSE OR REFILL THIS CONTAINER

**FLAMMABLE LIQUID**

**3**

## SEAVICTOR 50 ANTIFOULING 60A5000 RED

ACCEPTED  
with COMMENTS  
in EPA Letter Date

MAY 31 2005

Under the Federal Insecticide, Fungicide, and Rodenticide Act, amended, for the pesticide, registered under EPA Reg. 1

2568-9

ACTIVE INGREDIENT: CUPROUS OXIDE.....	39.59%
ACTIVE INGREDIENT: 4,5-Dichloro-2-n-octyl-3 (2H)-isothiazolone.....	2.19%
*INERT INGREDIENTS: .....	58.22%
.....	100.00%

CONTAINS PETROLEUM DISTILLATES.

KEEP OUT OF THE REACH OF CHILDREN.


**DANGER**

FOR COMMERCIAL USE ONLY. DO NOT USE IN OR AROUND A HOUSEHOLD OR DWELLING.

DO NOT SELL FOR USE IN AIR POLLUTION REGULATION AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102

DANGER! SEE FIRST AID AND OTHER PRECAUTIONS ON SIDE PANEL.

Net 5 Gallons (18.925 Liters)

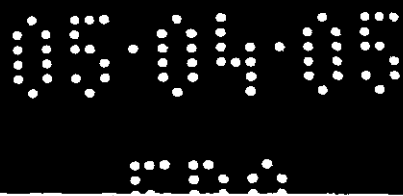

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

**DANGER**

**CAUSES EYE IRRITATION. HARMFUL  
IF ABSORBED THROUGH THE SKIN.**

UNPROTECTED PERSONS SHOULD BE KEPT OUT OF THE TREATMENT AREAS WITHIN A DISTANCE OF 100 FEET. DO NOT GET IN EYES, ON SKIN, OR ON CLOTHING. AVOID CONTACT WITH SKIN. WEAR A FULL FACE SHIELD. AVOID BREATHING VAPOR, MIST, DUST OR CHIPS FROM PAINTING OR SANDING. WHILE SPRAYING PAINT OR SANDING BOAT SURFACE, WEAR A SUPPLIED-AIR OR POWDERED AIR PURIFYING RESPIRATOR (PAPR) APPROVED BY MOSH FOR USE WITH PAINTS AND COATINGS.

WEAR A TYVEK HOODED COVERALL OR THE EXACT EQUIVALENT. COVERALLS BENEATH THE TYVEK HOODED COVERALLS. IMPERVIOUS GLOVES AND IMPERVIOUS FOOTWEAR THAT PROTECTS THE LOWER LEG. REMOVE CONTAMINATED CLOTHING AND DISCARD AFTER EACH USE. DO NOT REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING OR SMOKING.

**ENVIRONMENTAL HAZARDS**

THIS PESTICIDE IS TOXIC TO FISH AND AQUATIC INVERTEBRATES. DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT INTO LAKES, STREAMS, PONDS, ESTUARIES, OCEANS OR OTHER WATER UNLESS IN ACCORDANCE WITH THE REQUIREMENTS OF A NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT AND THE PERMITTING AUTHORITY HAS BEEN NOTIFIED IN WRITING PRIOR TO DISCHARGE. DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT TO SEWER SYSTEMS WITHOUT PREVIOUSLY NOTIFYING THE LOCAL SEWAGE TREATMENT PLANT AUTHORITY. FOR GUIDANCE CONTACT YOUR STATE WATER BOARD OR REGIONAL OFFICES OF THE EPA. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATER. DEPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL. WEAR PROTECTIVE CLOTHING AND SUPPLIED AIR RESPIRATOR IN ACCORDANCE WITH THE PRECAUTIONARY STATEMENTS ABOVE WHEN HANDLING, PAINTING OR REMOVING THIS PAINT.

**PHYSICAL OR CHEMICAL HAZARDS**  
FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

**FIRST AID**

IF IN EYES: HOLD EYELIDS OPEN AND FLUSH WITH A STEADY, GENTLE STREAM OF WATER FOR 15 MINUTES. REMOVE CONTACT LENSES, IF PRESENT, AFTER THE FIRST 5 MINUTES. THEN CONTINUE RINSING. CALL A POISON CONTROL CENTER OR DOCTOR FOR TREATMENT ADVICE.

IF ON SKIN: TAKE OFF CONTAMINATED CLOTHING. RINSE SKIN IMMEDIATELY WITH PLENTY OF WATER FOR 15-20 MINUTES. CALL A POISON CONTROL CENTER OR A DOCTOR FOR TREATMENT.

IF INHALED: REMOVE PERSON TO FRESH AIR. IF PERSON IS NOT BREATHING, GIVE ARTIFICIAL RESPIRATION. THEN CALL 911 OR AN AMBULANCE.

IF SWALLOWED: CALL A DOCTOR OR A POISON CONTROL CENTER. DRINK 1 OR 2 GLASSES OF WATER AND INDUCE VOMITING BY TOUCHING THE BACK OF THROAT WITH FINGER. IF A PERSON IS UNCONSCIOUS, DO NOT GIVE ANYTHING BY MOUTH AND DO NOT INDUCE VOMITING.

**DIRECTIONS FOR USE**

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

**ANTIFOULING FOR METAL  
BOTTOMS:**

TO CONTROL THE ATTACHMENT OF MARINE ANTIFOULING, IE. BARNACLES, GRASS, ALGAE, TUBE WORMS, MUSSELS, AND SNAILS, ON HULLS OF BOATS AND VESSELS IN SALT, BRACKISH AND FRESH WATER WHICH WOULD SUSTAIN SUCH GROWTH. WHEN USED ON ALUMINUM HULLS A BARRIER COAT OF TWO COATS OF EPOXY COATING ATTAINING AT LEAST 12 MILS DFT MUST BE APPLIED FIRST. CONSULT WITH YOUR REPRESENTATIVE FOR SPECIFIC BARRIER RECOMMENDATIONS. A MINIMUM OF TWO COATS OF THIS PRODUCT IS RECOMMENDED FOR BEST PERFORMANCE. THIS PRODUCT IS NOT FOR USE ON PLEASURE CRAFTS OR USE IN MARINAS.

**SURFACE PREPARATION:**

BEFORE APPLICATION OF ANTIFOULING ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, FLUX, LOOSE PAINT, SALT RESIDUES AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTI-CORROSIIVE BARRIER COATS. FOLLOW RESPIRATOR MANUFACTURER'S DIRECTIONS FOR USE. REMOVE CONTAMINATED CLOTHING AND WASH CLOTHING BEFORE RE-USE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, OR USING TOBACCO.

**MIXING:**

BEFORE USE, POWDER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.

**APPLICATION:**

APPLY BY BRUSH, ROLL, OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95 F) AIRLESS SPRAY OR REGULAR COLD SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSS HATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.


**THINNING:**

NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER NO. 7 XYLENE.

**DRYING TIME:**

AT 70 F AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE IMMERSION.

REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

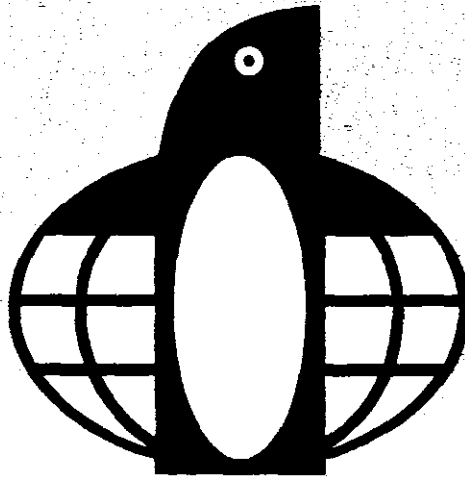

**JOTUN**

**VOC OF THIS PRODUCT IS 396  
GRAMS/LITER (3.3 LBS/GAL).**

**MEDICAL EMERGENCY NUMBER: 1-800-424-9300**

**WARNING**

Children can fall into bucket and drown

Keep children away from buckets with even a small amount of water

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

4  
8  
4