

2568-99

10/09/2012

1/4



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

WASHINGTON D C 20460

OFFICE OF  
PREVENTION PESTICIDES  
AND TOXIC SUBSTANCES

OCT - 9 2012

Ms Patricia A Turley  
Regulatory Coordinator for,  
Jotun Paints, Inc  
9203 Highway 23  
Belle Chase, LA 70037

Mail to Attn Pat Turley  
ST Technical Associates  
5 Rogers Avenue  
Milford, CT 06460-5230

Subject Antifouling Seaforce 300 AV Dark Red  
EPA Registration Number 2568-99  
Your Amendment Dated July 6, 2012  
EPA Received Date July 11, 2012

The amendment referred to above, submitted in connection with registration under the Insecticide, Fungicide, and Rodenticide Act, (FIFRA), as amended, to change the product name, is acceptable

The product labeling will be amended to reflect the following


Old Product Name Seavictor Antifouling 60A5000 Dark Red 3GFDRD

New Product Name Antifouling Seaforce 300 AV Dark Red

A stamped copy of the labeling is enclosed

If you have questions concerning this letter, please contact Karen M Leavy at (703)-308-6237

Sincerely,

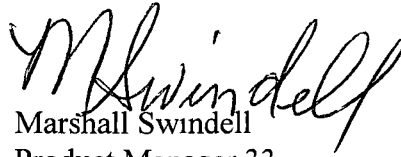

Marshall Swindell  
Product Manager 33  
Regulatory Management Branch I  
Antimicrobials Division(7510P)

BATCH 51118419

DOM 08/01/2008

Health	3
Fire hazard	3
Reactivity	1
Protective Equipment	X

**D O T SHIPPING NAME** PAINT

**D O T HAZARD**  
CLASS FLAMMABLE LIQUID

**D O T HAZARD**

**IDENTIFICATION NUMBER** UN1263

**3GFD RD**

**E P A REG NO** 2568 99  
**E P A EST NO** 002568 LA 001

Jotun Paints, Inc  
9203 Highway 23  
Ede Chasse LA 70037

**ACCEPTED with COMMENTS**  
EPA Letter Dated: **10-9-2012**

**ACCEPTED with COMMENTS**  
EPA Letter Dated:

Under the Federal Insecticide, Fungicide and Rodenticide Act amended by the Federal Insecticide, Fungicide and Rodenticide Act registered under EPA reg No **2568-99**

Federal Insecticide, Fungicide and Rodenticide Act as amended by the Federal Insecticide, Fungicide and Rodenticide Act registered under EPA Reg No

**STORAGE AND DISPOSAL**

DO NOT CONTAMINATE WATER FOOD OR FEED BY STORAGE OR DISPOSAL KEEP CONTAINER CLOSED WHEN NOT IN USE IN CASE OF SPILLAGE ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS

**PESTICIDE DISPOSAL**  
PESTICIDE WASTES ARE TOXIC IMPROPER DISPOSAL OF EXCESS PESTICIDE SPRAY MIXTURE OR RINSATE IS A VIOLATION OF FEDERAL LAW IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE

**CONTAINER DISPOSAL**  
NONREFILLABLE CONTAINER

DO NOT REUSE OR REFILL THIS CONTAINER OFFER FOR RECYCLING IF AVAILABLE TRIPLE RINSE CONTAINER PROMPTLY AFTER EMPTYING TRIPLE RINSE AS FOLLOWS EMPTY THE REMAINING CONTENTS INTO APPLICATION EQUIPMENT OR A MIX TANK AND DRAIN FOR 10 SECONDS AFTER THE FLOW BEGINS TO DRIP FILL THE CONTAINER 1/10TH FULL WITH THINNER AND RECAP SHAKE FOR 10 SECONDS POUR RINSATE INTO APPLICATION EQUIPMENT OR A MIX TANK OR STORE RINSATE FOR LATER USE OR RECYCLING DRAIN FOR 10 SECONDS AFTER THE FLOW BEGINS TO DRIP REPEAT THIS PROCEDURE TWO MORE TIMES THEN OFFER FOR RECYCLING OR RECONDITIONING OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES

**ANTIFOULING**  
**SEAFORCE 300 AV**  
**DARK RED**

ACTIVE INGREDIENT CUPROUS OXIDE 39.59%\*  
ACTIVE INGREDIENT 4,5-DICHLORO-2-N-OCTYL-4-ISOTHIAZOLIN-3-ONE 2.19%\*  
INERT INGREDIENTS 58.22%\*  
100.00%\*

METALLIC COPPER EQUIVALENT 35.16%  
CONTAINS PETROLEUM DISTILLATES XYLENE OR XYLENE RANGE AROMATIC SOLVENTS

**KEEP OUT OF THE REACH OF CHILDREN**  
**DANGER**

FOR USE IN COMMERCIAL OR GOVERNMENT SHIPYARDS ONLY NOT FOR USE BY PRIVATE APPLICATORS OR MARINAS NOT FOR USE ON STATIONARY STRUCTURES  
NOT SOLD FOR USE IN AIR POLLUTION REGULATION AREAS PHOTOCHEMICALLY REACTIVE PER RULE 102

SEE FIRST AID AND OTHER PRECAUTIONS ON SIDE PANEL

**Net 20 LITERS (5.28 GALLONS)**

3/4

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS & DOMESTIC ANIMALS  
DANGER**

**CORROSIVE** CAUSES IRREVERSIBLE EYE DAMAGE HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN AVOID CONTACT WITH EYES SKIN OR CLOTHING WEAR A FULL FACE SHIELD AVOID BREATHING VAPOR MIST DUST OR CHIPS FROM PAINTING OR SANDING WHILE SPRAYING PAINT OR SANDING BOAT SURFACE WEAR A SUPPLIED AIR OR POWERED AIR PURIFYING RESPIRATOR (PAPR) APPROVED BY NIOSH FOR USE WITH PAINTS AND COATINGS

WEAR A TYVEK HOODED COVERALL OR THE EXACT EQUIVALENT COVERALLS BENEATH THE TYVEK HOODED COVERALLS IMPERVIOUS GLOVES AND IMPERVIOUS FOOTWEAR THAT PROTECTS THE LOWER LEG REMOVE CONTAMINATED CLOTHING AND DISCARD AFTER EACH USE DO NOT REUSE WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING OR SMOKING

**ENVIRONMENTAL HAZARDS**

THIS PESTICIDE IS TOXIC TO FISH AND AQUATIC INVERTEBRATES DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT INTO LAKES STREAMS PONDS ESTUARIES OCEANS OR OTHER WATER UNLESS IN ACCORDANCE WITH THE REQUIREMENTS OF A NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT AND THE PERMITTING AUTHORITY HAS BEEN NOTIFIED IN WRITING PRIOR TO DISCHARGE DO NOT DISCHARGE EFFLUENT CONTAINING THIS PRODUCT TO SEWER SYSTEMS WITHOUT PREVIOUSLY NOTIFYING THE LOCAL SEWAGE TREATMENT PLANT AUTHORITY FOR GUIDANCE CONTACT YOUR STATE WATER BOARD OR REGIONAL OFFICES OF THE EPA DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATERBODIES OF PAINT DEBRIS IN AN APPROVED LANDFILL WEAR PROTECTIVE CLOTHING AND SUPPLIED AIR PURIFYING RESPIRATOR IN ACCORDANCE WITH THE PRECAUTIONARY STATEMENTS ABOVE WHEN HANDLING PAINTS OR REMOVING PAINTS

**PHYSICAL OR CHEMICAL HAZARDS**

**COMBUSTIBLE** DO NOT USE OR STORE NEAR HEAT OR OPEN FLAME

<b>FIRST AID</b>	
IF IN EYES	HOLD EYES OPEN AND RINSE SLOWLY AND GENTLY FOR 15-20 MINUTES REMOVE CONTACT LENSES IF PRESENT AFTER THE FIRST 5 MINUTES AND THEN CONTINUE RINSING CALL A POISON CONTROL CENTER OR DOCTOR FOR TREATMENT ADVICE
IF SWALLOWED	IMMEDIATELY CALL A POISON CONTROL CENTER OR DOCTOR DO NOT INDUCE VOMITING UNLESS TOLD TO DO SO BY A POISON CONTROL CENTER OR DOCTOR DO NOT GIVE ANY LIQUID TO THE PERSON DO NOT GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON
IF ON SKIN OR CLOTHING	TAKE OFF CONTAMINATED CLOTHING RINSE SKIN IMMEDIATELY WITH PLENTY OF WATER FOR 15-20 MINUTES CALL A POISON CONTROL CENTER OR DOCTOR FOR TREATMENT ADVICE
IF INHALED	MOVE A PERSON TO FRESH AIR IF PERSON IS NOT BREATHING CALL 911 OR AN AMBULANCE THEN GIVE ARTIFICIAL RESPIRATION PREFERABLY MOUTH TO MOUTH IF POSSIBLE CALL A POISON CONTROL CENTER OR DOCTOR FOR FURTHER TREATMENT ADVICE
OTHER	HAVE THE PRODUCT CONTAINER OR LABEL WITH YOU WHEN CALLING A POISON CONTROL CENTER OR DOCTOR OR GOING FOR TREATMENT
<b>MEDICAL EMERGENCY NUMBER 1 800-424 9300</b>	
NOTE TO PHYSICIAN	
Contains petroleum distillate -- vomiting may cause aspiration pneumonia	

9/2012  
Under the Federal Insecticide, Fungicide, and Rodenticide Act  
EPA Reg. 40 CFR 152.101

**DIRECTIONS FOR USE**

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

**ANTIFOULING FOR METAL BOTTOMS**

TO CONTROL THE ATTACHMENT OF MARINE FOULING I.E. BARNACLES GRASS ALGAE TUBE WORMS MUSSELS AND SNAILS ON HULLS OF BOATS AND VESSELS IN SALT BRACKISH AND FRESH WATER WHICH WOULD SUSTAIN SUCH GROWTH WHEN USED ON ALUMINUM HULLS A BARRIER COAT OF TWO COATS OF EPOXY COATING ATTAINING AT LEAST 12 MILS DFT MUST BE APPLIED FIRST CONSULT WITH YOUR REPRESENTATIVE FOR SPECIFIC BARRIER RECOMMENDATIONS A MINIMUM OF TWO COATS OF THIS PRODUCT IS RECOMMENDED FOR BEST PERFORMANCE THIS PRODUCT IS NOT FOR USE ON PLEASURE CRAFTS OR USE IN MARINAS

**SURFACE PREPARATION**

BEFORE APPLICATION OF ANTIFOULING ALL SURFACES MUST BE DRY AND CLEANED OF DIRT DUST OIL RUST LOOSE PAINT SALT RESIDUES AND OTHER CONTAMINANTS STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTI CORROSIVE BARRIER COATS

**MIXING**

BEFORE USE POWER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY

**APPLICATION**

APPLY BY BRUSH ROLL OR SPRAY CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95°F) AIRLESS SPRAY OR REGULAR COLD SPRAY APPLY A FULL WET COAT IN A DOUBLE CROSSHATCH PATTERN DO NOT PAINT IN COLD OR DAMP WEATHER

**THINNING**

NORMALLY NO THINNING REQUIRED WHERE THINNING IS NECESSARY USE JOTUN THINNER 7

**DRYING TIME**

AT 70°F AND 50% R H ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS AND A MINIMUM OF 8 HOURS BEFORE IMMERSION

REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN AVAILABLE UPON REQUEST FOR FURTHER SAFETY AND HANDLING INFORMATION

**THE VOC OF THIS PAINT IS  
396 GRAMS/LITER (3 LBS/GAL)**

ff