

**G.M. INTERNATIONAL COPPER PAINT**

A semi-hard coating of excellent anti-fouling properties for the bottoms of all wooden craft.

G. M. INTERNATIONAL COPPER PAINT is made with properties which allow for its application directly to bare wood. No special primers are required.

**DIRECTIONS**

Stir the paint well so that all the pigment is completely mixed with the liquid and keep it stirred.

G. M. INTERNATIONAL COPPER PAINT will not settle hard in the can and, therefore, can be easily mixed right in the container.

When applying G. M. INTERNATIONAL COPPER PAINT it is recommended that, where circumstances permit, the last coat should be allowed at least two hours to harden before the vessel is launched.


Allow overnight drying between coats.

It is also suggested that the launching take place within five hours after final application. However, the launching may safely be delayed for several days if during this time care is taken that the composition is not subjected to the direct rays of the sun. It is unwise to leave copper and anti-fouling paints exposed to the air for long periods.

Do not try to save on bottom compositions. The extent of efficiency is determined by the thickness of the coatings. Therefore, when possible, three full coats are recommended.

**IMPORTANT:—DO NOT INTERFERE WITH THE PROPER FUNCTIONING OF G.M. INTERNATIONAL COPPER PAINT BY ADDING ANY THINNERS OR DRIERS.**

APPROXIMATE COVERAGE on average surfaces is 400 sq. ft. per gallon, 2 coats.

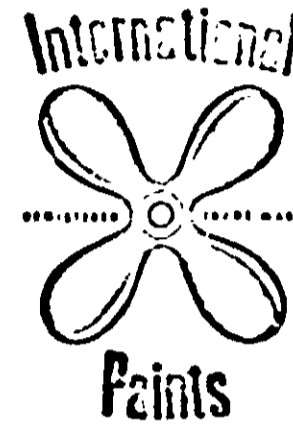

**ONE U.S. GALLON**

**WARNING!**

**KEEP OUT OF THE REACH OF CHILDREN**

See cautions elsewhere on label


**G.M.  
International<sup>®</sup>  
COPPER PAINT**

ACTIVE INGREDIENTS	PER CENT
CUPROUS OXIDE	29.1
INERT INGREDIENTS	<u>70.9</u>
	100.0
ELEMENTAL COPPER	25.8%

**150 INTER-COP RED**

E.P.A. REG. NO. 2693-10 - AA

APRIL - 27 -  
FOR I  
ED UNCL 2693-10  
EQ. ATTACH

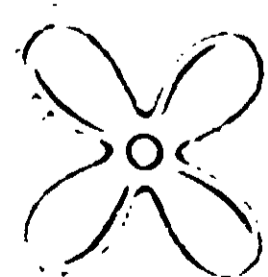

**International Paint Company, Inc.**  
NEW YORK, NEW YORK

ONE U.S. GALLON

WARNING!

KEEP OUT OF THE REACH OF CHILDREN

See cautions elsewhere on label

G.M.  
**International**  
COPPER PAINT

150 INTER-COP RED

E.P.A. REG. NO. 2693-10 - AA

APRIL - 27 - 1978

TO  
BE  
USED  
FOR  
EQUIPMENT UNDER  
EQUIPMENT UNDER  
EQUIPMENT UNDER


FACTORIES

U. S. A. .... UNION, N. J.	HOLLAND .... RIJSDIJK
U. S. A. .... SAN FRANCISCO	ITALY .... GENOVA
U. S. A. .... NEW ORLEANS	ITALY .... TRIESTE
AUSTRALIA .... SYDNEY	MEXICO .... MEXICO CITY
BRAZIL .... RIO DE JANEIRO	NEW ZEALAND .... AUCKLAND
CANADA .... MONTREAL	NEW ZEALAND .... WELLINGTON
CANADA .... REGINA	NIGERIA .... IKEJA
CANADA .... VANCOUVER	NORWAY .... BERGEN
DENMARK .... COPENHAGEN	PORTUGAL .... SETUBAL
ENGLAND .... FELLING-ON-TYNE	SCOTLAND .... GLASGOW
FRANCE .... ROUEN	SPAIN .... BILBAO
GERMANY .... HAMBURG	SWEDEN .... GOTHENBURG
	VENEZUELA .... MARACAIBO

WARNING

Harmful if swallowed. Do not use or store near heat or open flame. Use with adequate ventilation. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.



International Paint Company, Inc.  
NEW YORK SAN FRANCISCO NEW ORLEANS

PER CENT  
29.1  
70.9  
00.0