

"SUPERTROP" ANTIFOULING PAINT

An extra strong antifouling paint suitable for the protection of the bottoms of steel, wood and fiberglass boats.

DIRECTIONS

When applying "SUPERTROP" ANTIFOULING PAINT, the last coat should be allowed at least two hours to harden before the yacht is launched. It is also desirable that launching take place within five hours after final application. If this schedule is not possible, launching may be delayed for several days provided the composition is not subjected to the direct rays of the sun. Overhardening of the composition before launching will affect in a deleterious manner initial antifouling paint protection.


PREVIOUSLY PAINTED SURFACES - If old finish is in good condition, "SUPERTROP" ANTIFOULING PAINT can usually be applied directly over it after a thorough sanding with medium grit paper. When in poor condition, remove old finish to bare surface and follow painting instructions as below.

BARE SURFACES - WOOD - Apply three coats to bare wood. No special primers are required.

FIBERGLASS - Sand surface to fine finish with 120-150 grit production paper. Apply one coat of 347 INTERLUX FIBROGLASS SILVER followed by two coats of SUPERTROP ANTIFOULING PAINT.

STEEL - On steel surfaces, apply two coats of SUPERTROP ANTIFOULING PAINT followed by one coat of 347 INTERLUX FIBROGLASS SILVER.

IMPORTANT - DO NOT INTERFERE WITH THE DRYING AND CURING OF "SUPERTROP" ANTIFOULING PAINT BY USING HEAT, DRIERS OR THINNERS.

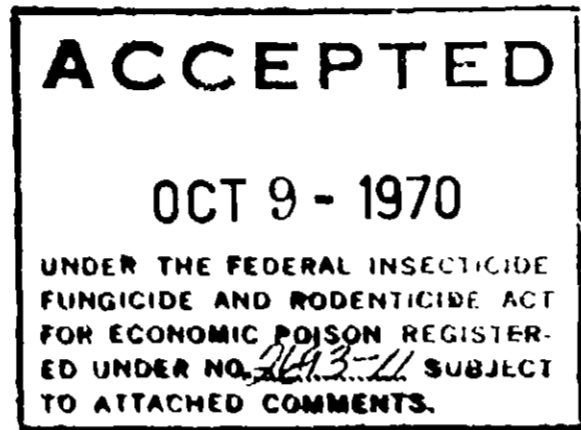

ONE U.S. GALLON

WARNING!

KEEP OUT OF THE REACH OF CHILDREN

See other warnings on back panel

Supertrop[®]

Antifouling Paint

46 RED

For Wood, Fiberglass and Steel

ACTIVE INGREDIENT	PER CENT
CUPROUS OXIDE	23.6
INERT INGREDIENTS	76.4
	100.0%
ELEMENTAL COPPER	20.9%



International Paint Company, Inc.
NEW YORK · SAN FRANCISCO · NEW ORLEANS

World's largest marine paint makers

ONE U.S. GALLON

WARNING!

KEEP OUT OF THE REACH OF CHILDREN

See other warnings on back panel



Supertrop®

Antifouling Paint

46 RED

*For Wood, Fiberglass
and Steel*

FACTORIES

U.S.A.	UNION N.J.	MILANE	RIJSDWIJK
U.S.A.	SAN FRANCISCO	ITALY	GENOA
U.S.A.	NEW ORLEANS	ITALY	TRIESTE
AUSTRALIA	SYDNEY	MEXICO	MEXICO CITY
BRAZIL	RIO DE JANEIRO	NEW ZEALAND	AUCKLAND
CANADA	MONTREAL	NEW ZEALAND	WELLINGTON
CANADA	REGINA	NIGERIA	AKETA
CANADA	VANCOUVER	NORWAY	BERGEN
DENMARK	COPENHAGEN	PORTUGAL	LEIRIA
ENGLAND	REDFORD TOWNE	SCOTLAND	GLASGOW
FRANCE	ROUEN	SPAIN	BILBAO
GERMANY	HAMBURG	SWEDEN	GOTHEBURG
	VENICE	YUGOSLAVIA	

WARNING

Harmful if swallowed. Do not use or store near heat or open flame. **Use with adequate ventilation.** Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

U.S.D.A. Reg. No. 2693-11

International Paint Company, Inc.

NEW YORK · SAN FRANCISCO · NEW ORLEANS

World's largest marine paint makers



PER CENT
23.6
76.4
00.0%