

2693-12

7-15-2003

1/5

# INTERLUX®

ANTIFOULING

## BOTTOMKOTE®

- Long Lasting
- Hard Finish
- Traditional protection for most areas
- Soft eroding bottom paint for cruising boats
- Polishing full season sailboat antifoulant
- Overcoats existing bottom paint – fiberglass, wood, steel
- Manufactured by Interlux, a division of International Paint Inc.


KEEP OUT OF REACH OF CHILDREN

### WARNING

See side panel for additional Precautionary Statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

49 RED

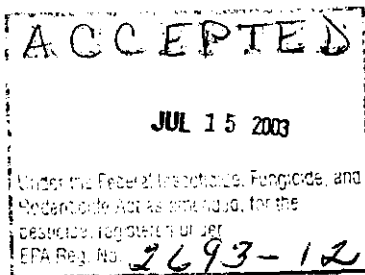

EPA REG. NO. 2693-12  
EPA EST. 2693-NJ-1

ACTIVE  
INGREDIENT  
Cuprous Oxide  
Inert Ingredients

42.75%  
57.25%  
100.00%

Elemental Copper 37.9%  
Contains Petroleum Distillates

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS  
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Safety & Health Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

**FIRST AID**

**If Swallowed:**

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give **any** liquid to the person.
- Do not give anything by mouth to an unconscious person.

**If on skin or clothing:**

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

**If inhaled:**


- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

**If in eyes:**

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

**Other:** Have the product container or label with you when calling a poison control center or doctor or going for treatment.

**Note to Physician:** Contains petroleum distillate – vomiting may cause aspiration pneumonia.

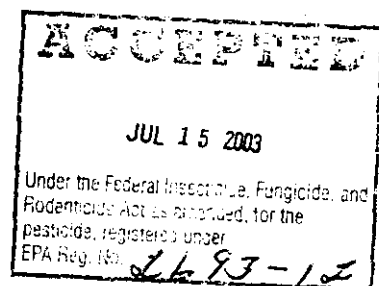

**ENVIRONMENTAL HAZARD**

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the



4/5

**ACCEPTED**  
JUL 15 2008  
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 269-3-12

**BOTTOMKOTE®**  
**DIRECTIONS FOR USE**

It is a violation of federal law to use this product in a manner inconsistent with its labeling

**PRODUCT DESCRIPTION:** The proven standard, all purpose antifouling bottom paint ideally suited for cruising and power boats that desire very good, dependable protection. BOTTOMKOTE® is resistant to algae, barnacles and other marine fouling. It has universal application over all types of properly prepared bottom paints and surfaces (except aluminum). BOTTOMKOTE® has a soft finish, enabling easy cleaning with minimal paint build-up. Ideal for commercial fishing vessels operating in warm waters.

**COMPATIBILITY:** BOTTOMKOTE® can be applied by brush, roller or spray over other antifouling paints provided these coatings are in good condition, well adhered to the hull and any loose or flaking paint has been removed. Soft antifouling must be sanded heavily or removed. Shake or mix well. Stir while using.

**V.O.C.:** 324 Grams per liter

**THINNER:** Brushing - INTERLUX® BRUSH-EASE 433  
Spraying - INTERLUX® SPECIAL THINNER 216

**THINNING:** Thin only when necessary. Do not exceed 10% by volume (15% on bare wood).

**CLEAN-UP:** INTERLUX® SPECIAL THINNER 216 or INTERLUX® BRUSH-EASE 433

**THEORETICAL COVERAGE:** 350 square feet per gallon per coat.

**DRYING TIMES:** Touch Dry - 2 hours

At 77°F (25°C) Dry to Overcoat - 16 hours minimum.\*  
Dry to Launch - 16 hours minimum, 48 hours maximum.\*

**APPLICATION TEMPERATURES:** 50°F (10°C) and above\* (Air and Hull)

\*If either the air or hull temperature falls below 50°F (10°C) during the 16 hour dry time, extend the dry time and launch time to 36 hours minimum.

**APPLICATION SYSTEMS**

**PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:** Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe the surface clean with INTERLUX® SPECIAL THINNER 216. Apply two (2) coats of INTERLUX® BOTTOMKOTE® allowing the appropriate dry times.

**POOR CONDITION:** Completely remove all old paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass, INTERLUX PINTOFF® 199 for wood and by sandblasting steel surfaces to a near white metal. Proceed with application system for bare work as described below.

**BARE FIBERGLASS - NO SAND SYSTEM:** Wash entire surface, thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202, changing rags frequently. Wipe clean with a dry cloth before liquid dries. (Be sure all wax and other contaminants are removed). Repair imperfections with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B. Sand and wipe clean. Apply one thin, continuous coat of INTERLUX® AL 200 FIBERGLASS PRIMER® with brush or roller. Do not spray; Do not sand. Allow to cure 2 hours but no more

than three and apply two (2) coats of INTERLUX® BOTTOMKOTE® allowing the appropriate dry times.

**SANDING SYSTEM:** Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202, changing rags frequently. Wipe surface clean with a dry cloth before liquid dries. (Be sure all wax and other contaminants are removed). Sand entire gelcoat well with 80 grit sandpaper until a flat, matte finish is obtained. Wipe surface clean. Repair imperfections with INTERLUX® SURFACING AND FAIRING COMPOUNDS 417A/418B. Sand and wipe clean. Apply two coats of INTERLUX® BOTTOMKOTE® allowing the appropriate dry times.

**BARE WOOD:** Sand entire surface thoroughly with 80 grit sandpaper; wipe surface clean. Repair imperfections with INTERLUX® EPOXY SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of INTERLUX® BOTTOMKOTE® reduced 10% with INTERLUX® SPECIAL THINNER 216 to penetrate the porous grain. Fair seams with INTERLUX® SEAM COMPOUND 30. Apply two more coats of INTERLUX® BOTTOMKOTE® unreduced allowing the appropriate dry times between coats.

**BARE STEEL:** Sandblast to a near white metal; remove blast residue with a broom and air hose. Immediately apply one very thin coat of INTERLUX® VINYLUX® PRIMEWASH 353/354; allow to dry a minimum of one (1) hour to a maximum of twenty-four. Do not sand. Fill in all imperfections with INTERLUX® EPOXY SURFACING AND FAIRING COMPOUND 417A/418B; sand smooth and wipe clean. Apply three coats of INTERLUX® UNDERWATER METAL PRIMER 360. Allow a minimum of eight hours between coats and before applying antifouling paint. Apply two coats of INTERLUX® BOTTOMKOTE® allowing appropriate dry times.

INTERLUX® For more information call 908-686-1300  
or write: Interlux, 2270 Morris Avenue, Union N.J. 07083

International Paint Inc.  
2270 Morris Ave.  
Union, NJ 07083

