

2693-18

2/17/2010

10f21

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



Office of Pesticide Programs

International Paints, LLC
2270 Morris Avenue
Union, N. J. 07083

FEB 17 2010

Attention: John P. Pazdera
Pesticide Registration Manager

Subject: Viny-Lux Vinyl-Base 340 Antifouling Blue
EPA Registration No. 2693-18
Notification Dated January 21, 2010

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9).

Proposed Notification

- To revise Storage and Disposal statement per PR Notice 2007-4

General Comments

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been added to your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely

A handwritten signature in black ink, appearing to read "Martha Terry" followed by a stylized flourish or initials.

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)



United States
Environmental Protection Agency
Washington, DC 20460

☐ Registration
☐ Amendment
☒ Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 2693-18	2. EPA Product Manager M. Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Vinv-Lux Vinyl Base 340 Antifouling Blue	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) International Paint LLC 2270 Morris Ave. Union NJ 07083 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

Notification - revised Storage and Disposal statement in accord with PR Notice 2007-4

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____		
* Certification must be submitted		If "Yes" Unit Packaging wgt. No. per container	If "Yes" Package wgt. No. per container		
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed to Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled		<input type="checkbox"/> Other _____			

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)			
Name John P. Pazdera	Title Pesticide Regis. Manager	Telephone No. (Include Area Code) 908-964-2283	
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.			6. Date Application Received (Stamped) _____ _____ _____ _____ _____ _____ _____ _____ _____ _____
2. Signature <i>John P. Pazdera</i>	3. Title Pesticide Registration Manager		
4. Typed Name John P. Pazdera	5. Date Jan 21, 2010		



AkzoNobel

Tomorrow's Answers Today

Mr. Marshall Swindell
Product Manager (33)
Regulatory Management Branch I
Antimicrobial Division (7504P)
U.S. EPA
Room S-4900, One Potomac Yard
2777 South Crystal Drive
Arlington, VA 22202-4501

Via Federal Express

January 21, 2010

Re: Vinyl-Lux Vinyl-Base 340 Antifouling Blue
EPA Reg. No. 2693-18
Notification – Response to PR Notice 2007-4

Dear Mr. Swindell:

The enclosed Notification pertains to our product Vinyl-Lux Vinyl-Base 340 Antifouling Blue, EPA Reg. No. 2693-18. Specifically, we wish to make the following label change:

- Revise the Storage and Disposal statement in accord with PR Notice 2007-4. No other changes are being made.

As this is an Agency-initiated amendment, no registration service fee is required.

Enclosed, therefore, please find:

- EPA Form 8570-1
- Certification Statement
- Five (5) copies of revised labeling
- Copy of EPA stamped label dated 5/22/08


Please do not hesitate to contact me at 908-964-2288 if there are any questions concerning this submission.

Very truly yours,

John P. Pazdera
Pesticide Registration Manager

JPP/cd

Enclosures

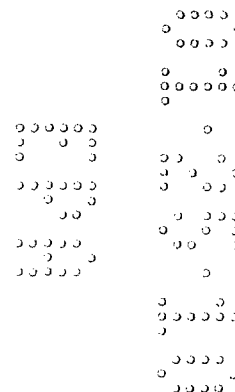

40f21

Viny-Lux Vinyl-Base 340 Antifouling Blue

Low V.O.C.

Fast Dry Formula

Hard, Durable Finish for Power and Sail Boats

Proven All Purpose Antifouling Protection

Fast dry, paint and launch the same day

Overcoats any existing bottom paint

Active Ingredient:

Cuprous Oxide = 35.00%

EPA Registration No. 2693-18

Inert Ingredients: = 65.00%

100.00%

EPA Establishment No. 2693-NJ-1

Copper as Metallic = 31.00%

Contains Petroleum Distillates.

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

INTERNATIONAL PAINT LLC

2270 Morris Ave.

UNION, NJ 07083

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give **any** liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat and open flame.

6021

STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

[Subset A – Directions for Use for Pleasure Craft]

PRODUCT DESCRIPTION:

This product is a hard, fast dry and durable easy to use antifouling paint that has been developed to provide effective season-long protection on all power and sail boats. It is formulated to overcoat existing antifouling paints and meets strict V.O.C. regulations in California while providing excellent antifouling protection. The fast dry formula allows the boat to be painted and launched in the same day. This product is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. It can be used in fresh, salt and brackish waters.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

COMPATIBILITY: This product can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been thoroughly sanded with 80 grit wet-or-dry sandpaper. This product can be applied by brush, roller or spray.

V.O.C.: Less than 330 grams/liter. (2.75 lbs./gal.)	THEORETICAL COVERAGE: 400 sq. ft./gal. yields 2 mils dry film thickness
THINNER: Interlux® Special Thinner 216 or Interlux Brush Ease 433	THINNING: Thin only when necessary. Do not exceed 10% maximum.
CLEAN UP: Interlux Special Thinner 216 or Interlux Brush Ease 433	APPLICATION TEMPERATURE: 50°F (10°C)* and above (air and hull).

ESTIMATED DRY TIMES:

Temperature	Touch Dry	Overcoating Time	Immersion Time	
°F (°C)		Minimum	Minimum	Maximum
50°F (10°C)	3 Hours	6 Hours	12 Hours	60 Days
60°F (15°C)	2 Hours	5 Hours	10 Hours	60 Days
75°F (24°C)	1 Hour	4 Hours	8 Hours	60 Days
95°F (35°C)	30 Minutes	2 Hours	6 Hours	60 Days

*If the air temperature falls below 50°F (10°C) during the dry time extend the dry times by 12 hours minimum.

Note: THINNING: The addition of thinners may effect the V.O.C. compliance of this product. Please check local regulations before adding thinners.

PREPARATION

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit wet-or-dry sandpaper; wipe surface clean with Interlux Special Thinner 216. Apply at least 2 coats of this product.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION:

Completely remove all old antifouling paint, using Interlux® Interstrip 299E for fiberglass, and wood, and by sandblasting to near white metal for steel. Follow application systems below.

BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All-Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following Interlux products. Fiberglass Surface Prep YMA601 or Low VOC Fiberglass Surface Prep 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

APPLICATION SYSTEMS

BARE FIBERGLASS - NO SAND SYSTEM:

Clean the surface following the preparation procedure above. Apply one coat, of Interlux InterProtect® 2000 following the label instructions for applying the primer and overcoating with antifouling paint. Apply two coats of this product, allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM:

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Sand and wipe clean. Apply two coats of this product, allowing for appropriate dry times.

90821

BARE WOOD:

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Apply the first coat of this product, thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux Seam Compound 30 (if necessary). Apply two more coats of this product unthinned, allowing for the appropriate dry times.

UNDERWATER METALS:

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN.

[Subset B – Alternate Directions for Use for Pleasure Craft]

PRODUCT DESCRIPTION:

This product is a hard modified epoxy, fast dry antifouling paint with clean stable colors that has been developed to provide effective season-long protection on all power and sail boats. The fast dry formula allows the boat to be painted and launched in the same day. This product is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. It can be used in fresh, salt and brackish waters.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

COMPATIBILITY: This product can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been thoroughly sanded with 80 grit wet-or-dry sandpaper. This product can be applied by brush, roller or spray.

V.O.C.: Less than 470 grams/liter. (3.92 lbs./gal.)	THEORETICAL COVERAGE: 400 sq. ft./gal. yields 2 mils dry film thickness
THINNER: Interlux Special Thinner 216 or Interlux Brush Ease 433	THINNING: Thin only when necessary. Do not to exceed 10% maximum.
CLEAN UP: Interlux Special Thinner 216 or Interlux Brush Ease 433	APPLICATION TEMPERATURE: 50°F (10°C)* and above (air and hull).

ESTIMATED DRY TIMES:

Temperature °F (°C)	Touch Dry	Overcoating Time Minimum	Immersion Time	
			Minimum	Maximum
50°F (10°C)	3 Hours	6 Hours	12 Hours	60 Days
60°F (15°C)	2 Hours	5 Hours	10 Hours	60 Days
75°F (24°C)	1 Hour	4 Hours	8 Hours	60 Days
95°F (35°C)	30 Minutes	2 Hours	6 Hours	60 Days

*If the air temperature falls below 50°F (10°C) during the dry time extend the dry times by 12 hours minimum.

PREPARATION

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit wet-or-dry sandpaper; wipe surface clean with Interlux Special Thinner 216. Apply at least 2 coats of this product.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION:

Completely remove all old antifouling paint, using Interlux Interstrip 299E for fiberglass, and wood, and by sandblasting to near white metal for steel. Follow application systems below.

BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All-Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following Interlux products. Fiberglass Surface Prep YMA601 or Fiberglass Solvent Wash 202 following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

APPLICATION SYSTEMS

BARE FIBERGLASS - NO SAND SYSTEM:

Clean the surface following the preparation procedure above. Apply one coat, of Interlux InterProtect® 2000 or YPA200 Fiberglass No-Sand Primer following the label instructions for applying the primer and overcoating with antifouling paint. Apply two coats of this product, allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM:

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Interlux Fiberglass Solvent Wash 202. Sand and wipe clean. Apply two coats of this product allowing for appropriate dry times.

12 of 21

BARE WOOD:

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Apply the first coat of this product thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux Seam Compound 30 (if necessary). Apply two more coats of this product unthinned, allowing for the appropriate dry times.

UNDERWATER METALS:

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN.

130621

Viny-Lux Vinyl-Base 340 Antifouling Blue

Low V.O.C.

Fast Dry Formula

Hard, Durable Finish for Power and Sail Boats

Proven All Purpose Antifouling Protection

Fast dry, paint and launch the same day

Overcoats any existing bottom paint

Active Ingredient:

Cuprous Oxide = 35.00%

EPA Registration No. 2693-18

Inert Ingredients: = 65.00%

100.00%

EPA Establishment No. 2693-NJ-1

Copper as Metallic = 31.00%

Contains Petroleum Distillates.

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

INTERNATIONAL PAINT LLC

2270 Morris Ave.

UNION, NJ 07083

14021

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give **any** liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat and open flame.

STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal.

Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container $\frac{1}{4}$ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

1600f21

[Subset A – Directions for Use for Pleasure Craft]

PRODUCT DESCRIPTION:

This product is a hard, fast dry and durable easy to use antifouling paint that has been developed to provide effective season-long protection on all power and sail boats. It is formulated to overcoat existing antifouling paints and meets strict V.O.C. regulations in California while providing excellent antifouling protection. The fast dry formula allows the boat to be painted and launched in the same day. This product is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. It can be used in fresh, salt and brackish waters.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

COMPATIBILITY: This product can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been thoroughly sanded with 80 grit wet-or-dry sandpaper. This product can be applied by brush, roller or spray.

V.O.C.: Less than 330 grams/liter. (2.75 lbs./gal.)	THEORETICAL COVERAGE: 400 sq. ft./gal. yields 2 mils dry film thickness
THINNER: Interlux® Special Thinner 216 or Interlux Brush Ease 433	THINNING: Thin only when necessary. Do not exceed 10% maximum.
CLEAN UP: Interlux Special Thinner 216 or Interlux Brush Ease 433	APPLICATION TEMPERATURE: 50°F (10°C)* and above (air and hull).

ESTIMATED DRY TIMES:

Temperature °F (°C)	Touch Dry	Overcoating Time Minimum	Immersion Time	
			Minimum	Maximum
50°F (10°C)	3 Hours	6 Hours	12 Hours	60 Days
60°F (15°C)	2 Hours	5 Hours	10 Hours	60 Days
75°F (24°C)	1 Hour	4 Hours	8 Hours	60 Days
95°F (35°C)	30 Minutes	2 Hours	6 Hours	60 Days

*If the air temperature falls below 50°F (10°C) during the dry time extend the dry times by 12 hours minimum.

Note: THINNING: The addition of thinners may effect the V.O.C. compliance of this product. Please check local regulations before adding thinners.

170921

PREPARATION

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit wet-or-dry sandpaper; wipe surface clean with Interlux Special Thinner 216. Apply at least 2 coats of this product.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION:

Completely remove all old antifouling paint, using Interlux® Interstrip 299E for fiberglass, and wood, and by sandblasting to near white metal for steel. Follow application systems below.

BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All-Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following Interlux products. Fiberglass Surface Prep YMA601 or Low VOC Fiberglass Surface Prep 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

APPLICATION SYSTEMS

BARE FIBERGLASS - NO SAND SYSTEM:

Clean the surface following the preparation procedure above. Apply one coat, of Interlux InterProtect® 2000 following the label instructions for applying the primer and overcoating with antifouling paint. Apply two coats of this product, allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM:

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Sand and wipe clean. Apply two coats of this product, allowing for appropriate dry times.

BARE WOOD:

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Apply the first coat of this product, thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux Seam Compound 30 (if necessary). Apply two more coats of this product unthinned, allowing for the appropriate dry times.

UNDERWATER METALS:

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN.

190f21

[Subset B – Alternate Directions for Use for Pleasure Craft]

PRODUCT DESCRIPTION:

This product is a hard modified epoxy, fast dry antifouling paint with clean stable colors that has been developed to provide effective season-long protection on all power and sail boats. The fast dry formula allows the boat to be painted and launched in the same day. This product is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. It can be used in fresh, salt and brackish waters.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

COMPATIBILITY: This product can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been thoroughly sanded with 80 grit wet-or-dry sandpaper. This product can be applied by brush, roller or spray.

V.O.C.: Less than 470 grams/liter. (3.92 lbs./gal.)	THEORETICAL COVERAGE: 400 sq. ft./gal. yields 2 mils dry film thickness
THINNER: Interlux Special Thinner 216 or Interlux Brush Ease 433	THINNING: Thin only when necessary. Do not to exceed 10% maximum.
CLEAN UP: Interlux Special Thinner 216 or Interlux Brush Ease 433	APPLICATION TEMPERATURE: 50°F (10°C)* and above (air and hull).

ESTIMATED DRY TIMES:

Temperature	Touch Dry	Overcoating Time	Immersion Time	
°F (°C)		Minimum	Minimum	Maximum
50°F (10°C)	3 Hours	6 Hours	12 Hours	60 Days
60°F (15°C)	2 Hours	5 Hours	10 Hours	60 Days
75°F (24°C)	1 Hour	4 Hours	8 Hours	60 Days
95°F (35°C)	30 Minutes	2 Hours	6 Hours	60 Days

*If the air temperature falls below 50°F (10°C) during the dry time extend the dry times by 12 hours minimum.

PREPARATION

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit wet-or-dry sandpaper; wipe surface clean with Interlux Special Thinner 216. Apply at least 2 coats of this product.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION:

Completely remove all old antifouling paint, using Interlux Interstrip 299E for fiberglass, and wood, and by sandblasting to near white metal for steel. Follow application systems below.

BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All-Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following Interlux products. Fiberglass Surface Prep YMA601 or Fiberglass Solvent Wash 202 following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

APPLICATION SYSTEMS

BARE FIBERGLASS - NO SAND SYSTEM:

Clean the surface following the preparation procedure above. Apply one coat, of Interlux InterProtect® 2000 or YPA200 Fiberglass No-Sand Primer following the label instructions for applying the primer and overcoating with antifouling paint. Apply two coats of this product, allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM:

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Interlux Fiberglass Solvent Wash 202. Sand and wipe clean. Apply two coats of this product allowing for appropriate dry times.

BARE WOOD:

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Apply the first coat of this product thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux Seam Compound 30 (if necessary). Apply two more coats of this product unthinned, allowing for the appropriate dry times.

UNDERWATER METALS:

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN.