

**CAUTION  
COMBUSTIBLE  
MIXTURE**


N.Y.F.D. C of A No. 1816

**PUTTY BUG TOXIC COMPOUND**

**Directions**

Prepare bottom of boat for painting. Prime seams, and other areas to be filled with desired shade and quality of **Interlux Antifouling Paint**. Using a putty knife, apply **Interlux Putty Bug Toxic Compound 35** to all underwater seams, butts, worm holes and between worm shoes and keel. Allow compound to dry overnight, and apply **Interlux Antifouling Paint**, following the directions on the label of the can over the entire surface of the bottom of the boat. This method assures excellent anti-fouling protection to planks and seams.

IMPORTANT—DO NOT ADD OIL TO THIS PRODUCT

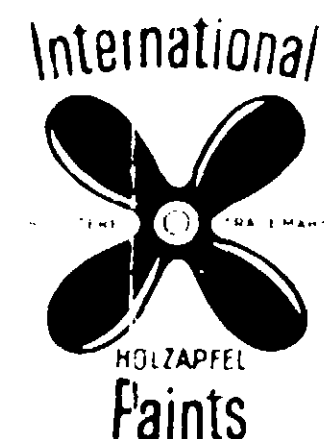

**ONE U.S. GALLON**

**WARNING!**  
KEEP OUT OF REACH OF CHILDREN  
See other warnings on back panel

**Interlux®**  
**FOR EXTERIOR OR INTERIOR USE**



**Almost  
Indestructible**

**35 PUTTY BUG TOXIC  
COMPOUND**

(for underwater use only)

ACTIVE INGREDIENT	PER CENT
Cuprous Oxide	18.5
INERT INGREDIENTS	81.5
	<hr/>
	100.0%


ELEMENTAL COPPER 16.4%

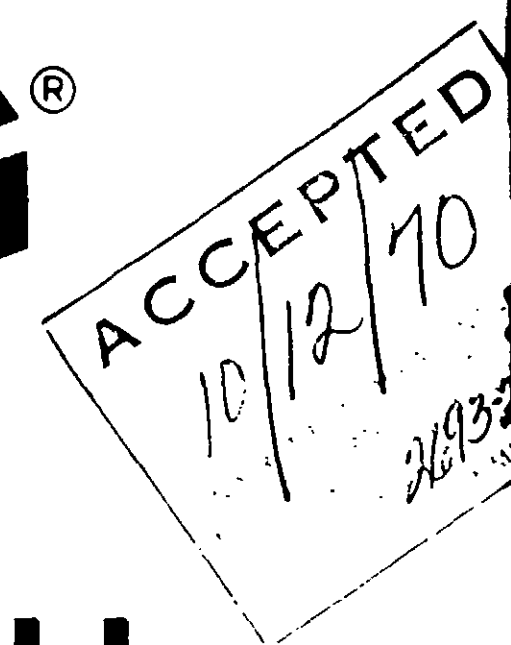

**International Paint Company, Inc.**

**NEW YORK · SAN FRANCISCO · NEW ORLEANS**

International

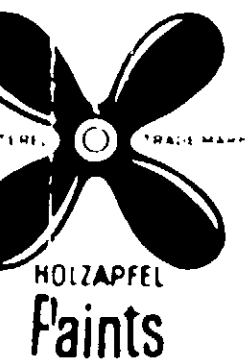

ONE U.S. GALLON

**WARNING!**  
KEEP OUT OF REACH OF CHILDREN  
See other warnings on back panel

**Interlux®**  
FOR EXTERIOR OR INTERIOR USE

**Almost  
Indestructible**

**35 PUTTY BUG TOXIC  
COMPOUND**  
(for underwater use only)

ACCEPTED  
10/12/70  
269322

**FACTORIES**

MELBOURNE	AUSTRALIA	GENOA	ITALY
SYDNEY	AUSTRALIA	TRIESTE	ITALY
RIO DE JANEIRO	BRAZIL	MEXICO CITY	MEXICO
MONTREAL	CANADA	AUCKLAND	NEW ZEALAND
REGINA	CANADA	WELLINGTON	NEW ZEALAND
VANCOUVER	CANADA	IKEJA	NIGERIA
COPENHAGEN	DENMARK	BERGEN	NORWAY
FELLING-ON-TYNE	ENGLAND	BILBAO	SPAIN
ROUEN	FRANCE	GOTHENBURG	SWEDEN
LE HAVRE	FRANCE	UNION, N. J.	U. S. A.
HAMBURG	GERMANY	SAN FRANCISCO	U. S. A.
ROTTERDAM	HOLLAND	NEW ORLEANS	U. S. A.
CALCUTTA	INDIA	MARACAIBO	VENEZUELA

**WARNING**

Harmful if swallowed. Do not use or store near heat or open flame.

Use with adequate ventilation.

Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

U.S.D.A. Reg. No. 2693-22

**International Paint Company, Inc.**  
NEW YORK · SAN FRANCISCO · NEW ORLEANS

