

'INTER-TROP' ANTIFOULING BOTTOM PAINT

An excellent coating of extra strong antifouling properties which is for use on the underwater section of **STEEL** and **WOODEN** vessels.

DIRECTIONS

Stir the paint well and keep it stirred.

'INTER-TROP' ANTIFOULING BOTTOM PAINT will not settle hard in the can and, therefore, can be easily mixed right in the container.

When applying 'INTER-TROP' ANTIFOULING BOTTOM PAINT it is recommended that, where circumstances permit, the last coat be allowed at least two hours to harden before the yacht is launched. It is also suggested that the launching take place within five hours after final application. However, the launching may safely be delayed for several days if, during this time, care is taken that the composition is not subjected to the direct rays of the sun. It is unwise to leave antifouling paints exposed to the air for long periods. Painting is often done between tides and it is then that the quick drying of 'INTER-TROP' ANTIFOULING BOTTOM PAINT will be helpful.

For **WOOD** vessels, 'INTER-TROP' ANTIFOULING BOTTOM PAINT is made with properties which allow for its application directly to bare wood. No special primers are required. Apply at least three coats on new work. Allow 5 hours drying time between coats.

On **STEEL** vessels, at least two full coats of 'INTER-TROP' ANTIFOULING BOTTOM PAINT should be applied over priming coats of **INTERLUX STEEL BOTTOM UNDERCOATERS**.

IMPORTANT:—DO NOT INTERFERE WITH THE PROPER FUNCTIONING OF 'INTER-TROP' ANTIFOULING BOTTOM PAINT BY ADDING ANY DRIERS OR THINNER


APPROXIMATE COVERAGE on average surfaces is 400 sq. ft. per gallon, 2 coat.

ONE U. S. GALLON

WARNING!

KEEP OUT OF REACH OF CHILDREN

See also warning on back panel

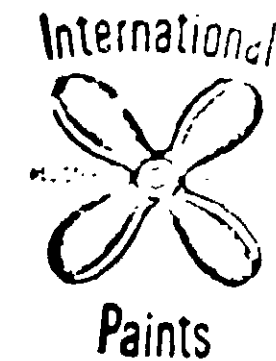

ACCEPTED

MADE IN THE UNITED STATES OF AMERICA
BY INTERNATIONAL PAINTS COMPANY
NEW YORK, N. Y.

INTER-TROP!
Antifouling

BOTTOM PAINT

RED 50

ACTIVE INGREDIENTS	PER CENT
CUPROUS OXIDE	19.4
PHENARSAZINE CHLORIDE	4.5
INERT INGREDIENTS	76.1
	<hr/> 100.0%

ELEMENTAL ARSENIC	1.22%
WATER SOLUBLE ARSENIC	0.27%




International Paint Co. (California) Inc.
NEW YORK NEW ORLEANS NEW ORLEANS

ONE U.S. GALLON

WARNING!

KEEP OUT OF REACH OF CHILDREN

See other warning on back panel

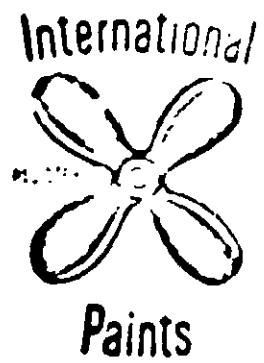

ED
INSTRUCTIONS
FOR USE

INTER-TROP!
Antifouling

BOTTOM PAINT

RED 50

INGREDIENTS	PER CENT
ZINC OXIDE	19.4
COBALT DIOXIDE	4.5
OTHER INGREDIENTS	76.1
	<hr/> 100.0%

122°
0.27%



NOTICE
THIS ANTIFOULING
SHOULD BE APPLIED
BY BRUSH OR ROLLER ONLY

FACTORIES


U.S.A.	UNION, N. J.	HOLLAND	RIJSWIJK
U.S.A.	SAN FRANCISCO	ITALY	GENOA
U.S.A.	NEW ORLEANS	ITALY	TRIESTE
AUSTRALIA	SYDNEY	MEXICO	MEXICO CITY
BRAZIL	RIO DE JANEIRO	NEW ZEALAND	AUCKLAND
CANADA	MONTREAL	NEW ZEALAND	WELLINGTON
CANADA	REGINA	NIGERIA	IKIJA
CANADA	VANCOUVER	NORWAY	BERGEN
DENMARK	COPENHAGEN	PORTUGAL	SETUBAL
ENGLAND	FELLING-ON-TYNE	SCOTLAND	GLASGOW
FRANCE	ROUEN	SPAIN	BILBAO
GERMANY	HAMBURG	SWEDEN	GOTHENBURG
		VENEZUELA	MARACAIBO

WARNING
FATAL if swallowed. DO NOT USE,
POUR, SPILL, OR STORE NEAR HEAT OR
OPEN FLAME. Use with proper ventilation.
Avoid contact with skin and breathing
of vapor or spray mist. Close container after
each use.

Do not reuse empty container. Destroy it by perforating or
crushing. Bury or discard in a safe place.

E.P.A. REG. NO. 2693-35 -A1

International Paint Co. California Inc.
NEW YORK NEW ORLEANS NEW ORLEANS



Cameraman's Note

Poor Copy