

## "62" ANTIFOULING BOTTOM PAINT

An excellent coating of extra long anti-fouling particles which is for use on the under-water section of **STEEL** and **WOODEN** vessels.

### DIRECTIONS

Stir the paint well and keep it stirred.

"62" ANTIFOULING BOTTOM PAINT will not settle hard in the can and, therefore, can be easily mixed right in the container.


When applying "62" ANTIFOULING BOTTOM PAINT it is recommended that, where circumstances permit, the last coat be allowed at least two hours to harden before the yacht is launched. It is also suggested that the launching take place within five hours after final application. However, the launching may safely be delayed for several days if, during this time, care is taken that the composition is not subjected to the direct rays of the sun. It is unwise to leave antifouling paints exposed to the air for long periods. Painting is often done between tides and it is then that the quick drying of "62" ANTIFOULING BOTTOM PAINT will be helpful.

For **WOOD** vessels "62" ANTIFOULING BOTTOM PAINT is made with properties which allow for its application directly to bare wood. No special primers are required. Apply at least three coats on new work. Allow 5 hours drying time between coats.

On **STEEL** vessels, at least two full coats of "62" ANTIFOULING BOTTOM PAINT should be applied over two or preferably three priming coats of 347 "PRIMOCON" SILVER.


**IMPORTANT:--DO NOT INTERFERE WITH THE PROPER FUNCTIONING OF "62" ANTIFOULING BOTTOM PAINT BY ADDING ANY DRIERS OR THINNER.**

**APPROXIMATE COVERAGE** on average surfaces is 400 sq. ft. per gallon, 2 coats.

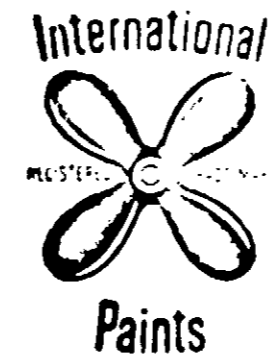

ONE U. S. GALLON  
**WARNING!**

KEEP OUT OF REACH OF CHILDREN  
See other warning on back panel

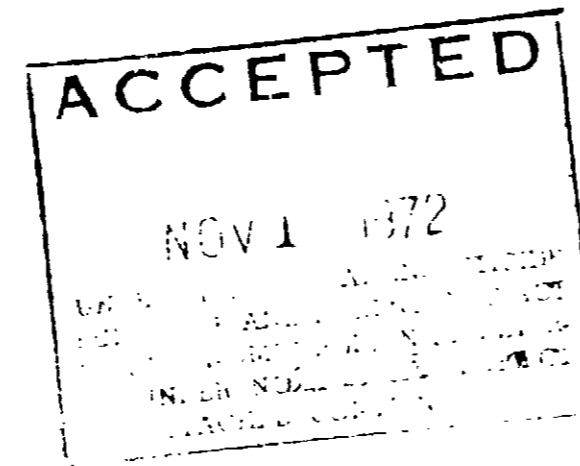

ACTIVE INGREDIENTS	PER CENT
CUPRICUS OXIDE	31.5
PHENARSANILE OXIDE	6.4
INERT INGREDIENTS	62.1
<b>TOTAL</b>	<b>100.0%</b>
EXPERIMENTAL WATER SOLUBLE ARSENIC	0.73%
WATER SOLUBLE ARSENIC	0.38%

**BOTTOM PAINT RED**


International Paints Company  
NEW YORK, N.Y. 10017

ONE U.S. GALLON

# WARNING!

KEEP OUT OF REACH OF CHILDREN

See other warning on back panel

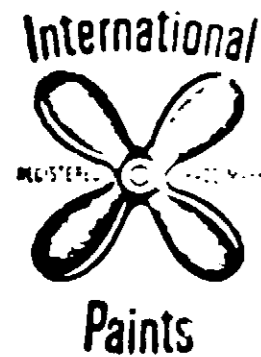

**NOTICE**  
THIS ANTIFOULING  
SHOULD BE APPLIED  
BY BRUSH OR ROLLER ONLY

### FACTORIES

U.S.A.	Union, N.J.	HOLLAND	Rijswijk
U.S.A.	San Francisco	ITALY	Genoa
U.S.A.	New Orleans	ITALY	Trieste
AUSTRALIA	Sydney	MEXICO	Mexico City
BRAZIL	Rio de Janeiro	NEW ZEALAND	Auckland
CANADA	Montreal	NEW ZEALAND	Wellington
CANADA	Regina	NIGERIA	Ikeja
CANADA	Vancouver	NORWAY	Bergen
DENMARK	Copenhagen	PORTUGAL	Setubal
ENGLAND	Felling-on-Tyne	SCOTLAND	Glasgow
FRANCE	Rouen	SPAIN	Bilbao
GERMANY	Hamburg	SWEDEN	Gothenburg
		VENEZUELA	Maracaibo

**WARNING**  
FATAL if swallowed. "DO NOT USE  
POUR, SPILL, OR STORE NEAR HEAT OR  
OPEN FLAME" Use with adequate ventila-  
tion. Avoid contact with skin and breathing  
of vapor or spray mist. Close container after  
each use.

Do not reuse empty container. Destroy it by perforating or  
crushing. Bury or discard in a safe place.

INGREDIENTS	PER CENT
ZINC OXIDE	31.5
SAZINE CHLORIDE	6.4
RESIN	62.1
	100.0%

LEAD	0.73%
ARSENIC	0.38%

**BOTTOM PAINT RED**

Reg. No. 2693-36 -AA

International Paints  
NEW YORK

