

2693-62


7/15/2003

ACCEPTED
 JUL 15 2003
 Under the Federal Insecticide, Fungicide, and
 Rodenticide Act as amended, for the
 pesticide registered under
 EPA Reg. No. 2693-62



FIBERGLASS BOTTOMKOTE

Proven, All Purpose Antifouling Protection
 Overcoats Any Existing Bottom Paint
 For All Fiberglass, Wood or Steel Boats

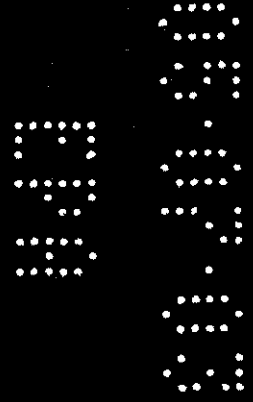

ONE U.S. GALLON
 (3.785 L)

ACTIVE INGREDIENT
 CUPROUS OXIDE
 INERT INGREDIENTS
 ELEMENTAL COPPER 37.9%

KEEP OUT OF REACH OF CHILDREN
WARNING
 See Side Panel for Additional Precautionary Statements

669
 BLUE

CONTAINS PETROLEUM DISTILLATES

EPA EST 2693-NJ-1
 EPA REG NO. 2693-62

PERCENT
 42.75%
 57.25%
 100.00%

14

2/4

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
KEEP OUT OF REACH OF CHILDREN

WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate - vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE! Keep away from heat, sparks or open flame.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

NOTE: Protective clothing and respirators should be used as described under Precautionary Statements.

GENERAL DESCRIPTION

This product is an antifouling protective coating resistant to algae, barnacles, zebra mussels and other marine fouling. For use in fresh, salt and brackish waters.

STORAGE & DISPOSAL


Do not contaminate water, food or feed by storage or disposal.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Open dumping is prohibited. Pesticide, spray mixture or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State, or local disposal authorities.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and dispose of in an approved landfill. Consult Federal, State or Local Disposal Authorities for approved alternative procedures.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-8300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Coatings Coatings Inc. including surface preparation, proper application, and environmental conditions. Therefore, Coatings Coatings Inc. cannot guarantee the product's suitability for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY ARE EXCLUDED. COATINGS COATINGS INC SHALL NOT, UNDER ANY CIRCUMSTANCES, BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the return of the purchase price or replacement of the product at Coatings Coatings Inc's option.

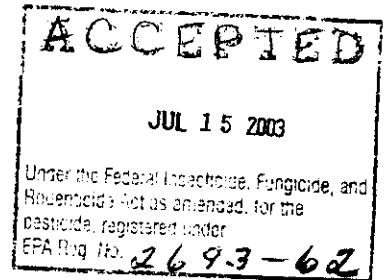

X. Interlux

For information call 908-686-1500
Or write: Interlux, 2270 Morris Ave., Union, NJ 07083

International Paint Inc.
2270 Morris Ave.
Union, NJ 07083

3/4

FIBERGLASS BOTTOMKOTE®

Directions for use continued:

PRODUCT DESCRIPTION: FIBERGLASS BOTTOMKOTE® provides excellent, long term antifouling protection against marine growth. Its modified epoxy base renders a hard, smooth finish with outstanding durability and abrasion resistance. It has universal application over all types of properly prepared bottom paints and surfaces (except aluminum). Ideal for use on fast fiberglass boats, as well as wood and steel hulls, when a tougher than normal coating is desired. May be burnished even smoother for racing sail and power boats.

SURFACE PREPARATION: Surface must always be clean, dry and properly prepared prior to painting. Failure to do so will lead to eventual blistering and/or peeling. All sanded surfaces must be wiped clean with INTERLUX SPECIAL THINNER 216 to remove sanding residue.

GENERAL APPLICATION: For use on boats below the true waterline. Can be brushed or rolled on fiberglass, wood, steel and previously painted surfaces per application systems below. Do not use on aluminum. Two (2) coats are recommended for best performance.

MIXING & THINNING: Shake or mix thoroughly and stir continuously while using. When applying with brush or roller, do not thin bottom paints.

THEORETICAL COVERAGE: Depending on surface and conditions, one gallon of bottom paint will usually cover 350 square feet of surface when brushed or rolled.

CLEAN-UP: Use INTERLUX SPECIAL THINNER 216 for cleaning equipment and paint brushes.

ESTIMATED DRY TIMES: INTERLUX bottom paints are designed for overcoating after an overnight dry. Prior to launching, allow a minimum dry of overnight and a maximum of 60 days. If drying conditions are poor, or if paint was applied too thickly, longer periods of drying will be required. Fresh coats of paint must be thoroughly dry before overcoating.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES - Good Condition: Remove all traces of loose paint and contamination by sanding the entire surface well with 80-120 grit production paper; wipe surface clean. Apply 2 coats of bottom paint.

Poor Condition: Completely remove all old paint with INTERLUX PINTOFF 299 for fiberglass, INTERLUX PINTOFF 199 for wood and by sandblasting steel surfaces to a near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS - No Sand System: Wash entire surface thoroughly with INTERLUX FIBERGLASS SOLVENT WASH 202, changing rags frequently. Before liquid dries, wipe clean with a dry cloth. (Be sure all wax contaminants are removed). Repair imperfections with EPOXY SURFACING AND FAIRING COMPOUND 417A/4188; sand and wipe clean. Apply one thin continuous coat of INTERLUX NO SAND PRIMER AL 200 with brush or roller. Do not spray, do not sand. Allow to cure between 2-3 hours - no more, no less. Apply two coats of bottom paint.

Sanding System: Wash entire surface thoroughly with INTERLUX FIBERGLASS SOLVENT WASH 202, changing rags frequently. Before liquid dries, wipe clean with a dry cloth. (Be sure all wax contaminants are removed). Repair imperfections with EPOXY SURFACING AND FAIRING COMPOUND 417A/4188; sand and wipe clean. Sand entire gelcoat well with 80-120 grit production paper until a flat, matte finish is obtained; wipe surface clean. Apply two coats of bottom paint.

BARE WOOD: Sand entire surface thoroughly to a smooth finish with 80 grit production paper; wipe surface clean. Repair imperfections with EPOXY SURFACING AND FAIRING COMPOUND 417A/4188; sand and wipe clean. Apply first coat of bottom paint reduced with INTERLUX SPECIAL THINNER 216 (10% maximum) to penetrate the porous grain. Fair seams with INTERLUX SEAM COMPOUND 30. Apply second and third coats of bottom paints unreduced.

***BARE STEEL:** Sandblast surface to a near white metal; remove blast residue with a broom and air hose. Immediately apply one very thin coat of VINYLUX PRIMEWASH 353/354; allow to dry a minimum of 1 hour, maximum of 24. Do not sand. Fill in all imperfections with EPOXY SURFACING & FAIRING COMPOUND 417A/4188; sand smooth and wipe clean. Apply 3 coats of INTERLUX UNDERWATER METAL PRIMER 360R, allow a minimum of 3 hours for the first coat to dry, 6 hours for the second and overnight for the third. Apply two coats of bottom paint.

*This is a simple system for small areas. For a more advanced, professional system, please consult the INTERLUX Technical Department, Courtauks Coatings Inc., P.O. Box 386, Union, NJ 07083.

Rev. 4/97

ACCEPTED
JUL 15 2003
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide registered under
EPA Reg. No. 2693-62

4/4

**SUBSETA
DIRECTIONS FOR USE (CONTINUED)**

This product is an antifouling protective coating resistant to algae, barnacles and other marine fouling.

SURFACE PREPARATION AND COMPATIBILITY: Surface preparation directions must be followed exactly in order to ensure adhesion. Surface must always be clean and dry prior to painting.

GENERAL APPLICATION PROCEDURES: Airless spray is recommended. Tip Size 21-26 thou. inch, pump rate of 30:1 or greater. For small areas, brush or roller may be used but multiple coats may be required to achieve the required dry film thickness. It is recommended to apply by airless spray one (1) or two (2) full coats of product.

MIXING AND THINNING INSTRUCTIONS: Mix thoroughly with power mixer prior to application. This coating is designed to be applied without thinning. Should thinning be necessary, consult your International representative prior to altering the coating.

CLEAN UP: For tools, equipment, etc., use International GTA007.

MINIMUM DRY AND LAUNCHING TIMES: Minimum drying time between coats is 6 hours, and before launching is 12 hours at a temperature of 73 °F.

THEORETICAL COVERAGE: 360 square feet per gallon, per coat at 2.0 mils D.F.T. Consult your International representative for practical application coverages. Practical square foot coverage per gallon, per coat is directly proportional to surface, application techniques and climatic conditions.

APPLICATION SYSTEMS

EXISTING ANTIFOULING SYSTEMS - GOOD CONDITION: High pressure fresh water wash with a minimum of 2500 p.s.i. and/or scrape to remove all marine growth, slime, salts, etc. Spot blast all areas of corrosion. Near White Metal Standard of SSPC-SP10-85. Blow down with clean and dry high pressure air to remove spent abrasives. Apply an approved underwater anticorrosive system.

POOR CONDITION: For "optimum" results, blast entire area to a Near White Metal Standard SSPC-SP10-85. Apply an approved underwater anticorrosive system.

NEW BUILDING: Blast entire area to a Near White Metal Standard SSPC-SP10-85. Blow down with clean dry high pressure air to remove all spent abrasives. Apply an approved underwater anticorrosive system.

WOOD AND NON-FERROUS SURFACES: Use surface preparation and primers as specified by the Manufacturer.

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Courtaulds Coatings Inc. including surface preparation, proper application and environmental conditions. Therefore, Courtaulds Coatings Inc. cannot guarantee this product's suitability for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. COURTAULDS COATINGS INC. SHALL NOT, UNDER ANY CIRCUMSTANCES, BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtaulds Coatings' option.

ACCEPTED
JUL 15 2003
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 2693-62