

FIBERGLASS BOTTOMKOTE 669 Blue

Proven, All Purpose Antifouling Protection
 Overcoats Any Existing Bottom Paint
 For All Fiberglass, Wood or Steel Boats
 Hard Bottom Paint, Compatible Over Other Antifouling
 Dependable Season Long Protection in All Waters


KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

EPA Registration No. 2693-62
 EPA Establishment No. 2693-NJ-1

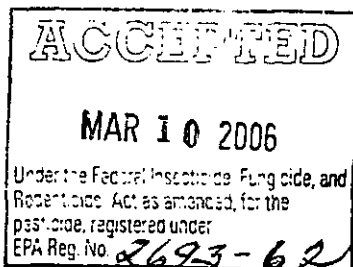

Active Ingredient:	Percent
Cuprous Oxide	42.75%
Inert Ingredients	57.25%
	100.00%

Elemental Copper 37.9%

CONTAINS PETROLEUM DISTILLATES

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of International Paint LLC including surface preparation, proper application and environmental conditions. Therefore, International Paint LLC cannot guarantee this product's suitability for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC SHALL NOT, UNDER ANY CIRCUMSTANCES, BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at International Paint LLC's option.

International Paint LLC
 2270 Morris Avenue
 Union, NJ 07083

2 7 8

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
KEEP OUT OF REACH OF CHILDREN**

WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:


- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

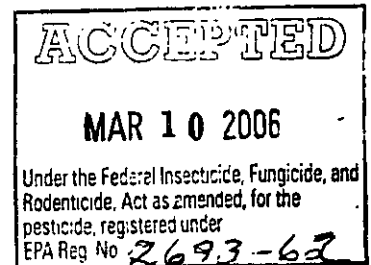

378

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE! Keep away from heat, sparks or open flame.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

NOTE: Protective clothing and respirators should be used as described under Precautionary Statements.

GENERAL DESCRIPTION

This product is an antifouling protective coating resistant to algae, barnacles, zebra mussels and other marine fouling. For use in fresh, salt and brackish waters.

STORAGE AND DISPOSAL


Do not contaminate water, food or feed by storage or disposal.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Open dumping is prohibited. Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and dispose of in an approved landfill. Consult Federal, State or Local Disposal Authorities for approved alternative procedures.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT)

MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

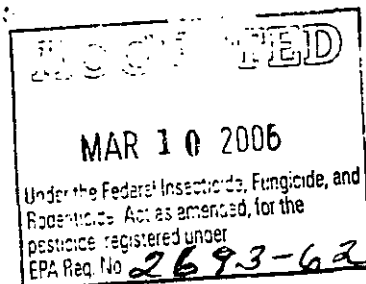

4 3 8

ACCEPTED

MAR 10 2006

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 2623-607

[Directions for Use for Pleasure Craft]

PRODUCT DESCRIPTION: FIBERGLASS BOTTOMKOTE® provides excellent, long term antifouling protection against marine growth. Its modified epoxy base renders a hard, smooth finish with outstanding durability and abrasion resistance. It has universal application over all types of properly prepared bottom paints and surfaces (except aluminum). Ideal for use on fast fiberglass boats, as well as wood and steel hulls, when a tougher than normal coating is desired. May be burnished even smoother for racing sail and power boats.

SURFACE PREPARATION: Surface must always be clean, dry and properly prepared prior to painting. Failure to do so will lead to eventual blistering and/or peeling. All sanded surfaces must be wiped clean with INTERLUX SPECIAL THINNER 216 to remove sanding residue.

GENERAL APPLICATION: For use on boats below the true waterline. Can be brushed or rolled on fiberglass, wood, steel and previously painted surfaces per application systems below. **Do not use on aluminum.** Two (2) coats are recommended for best performance.

MIXING & THINNING: Shake or mix thoroughly and stir continuously while using. When applying with brush or roller, do not thin bottom paints.

THEORETICAL COVERAGE: Depending on surface and conditions, one gallon of bottom paint will usually cover 350 square feet of surface when brushed or rolled.

CLEAN-UP: Use INTERLUX SPECIAL THINNER 216 for cleaning equipment and paint brushes.

ESTIMATED DRY TIMES: INTERLUX bottom paints are designed for overcoating after an overnight dry. Prior to launching, allow a minimum dry of overnight and a maximum of 60 days. If drying conditions are poor, or if paint was applied too thickly, longer periods of drying will be required. Fresh coats of paint must be thoroughly dry before overcoating.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES – Good Condition: Remove all traces of loose paint and contamination by sanding the entire surface well with 80-120 grit production paper; wipe surface clean. Apply 2 coats of bottom paint.

Poor Condition: Completely remove all old paint with INTERLUX PINTOFF 299 for fiberglass, INTERLUX PINTOFF 199 for wood and by sandblasting steel surfaces to a near white metal. Proceed with application system for bare work as described below.


BARE FIBERGLASS – No Sand System: Wash entire surface thoroughly with INTERLUX FIBERGLASS SOLVENT WASH 202, changing rags frequently. Before liquid dries, wipe clean with a dry cloth. (Be sure all wax contaminants are removed.) Repair imperfections with EPOXY SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply one thin continuous coat of INTERLUX NO SAND PRIMER AL 200 with brush or roller. Do not spray, do not sand. Allow to cure between 2-3 hours – no more, no less. Apply two coats of bottom paint.

Sanding System: Wash entire surface thoroughly with INTERLUX FIBERGLASS SOLVENT WASH 202, changing rags frequently. Before liquid dries, wipe clean with a dry cloth. (Be sure all wax contaminants are removed.) Repair imperfections with EPOXY SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Sand entire gelcoat well with 80-120 grit production paper until a flat, matte finish is obtained, wipe surface clean. Apply two coats of bottom paint.

BARE WOOD: Sand entire surface thoroughly to a smooth finish with 80 grit production paper; wipe surface clean. Repair imperfections with EPOXY SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of bottom paint reduced with INTERLUX SPECIAL THINNER 216 (10% maximum) to penetrate the porous grain. Fair seams with INTERLUX SEAM COMPOUND 30. Apply second and third coats of bottom paints unreduced.

***BARE STEEL:** Sandblast surface to a near white metal; remove blast residue with a broom and air hose. Immediately apply one very thin coat of VINYL-LUX PRIMEWASH 353/354; allow to dry a minimum of 1 hour, maximum of 24. Do not sand. Fill in all imperfections with EPOXY SURFACING & FAIRING COMPOUND 417A/418B; sand smooth and wipe clean. Apply 3 coats of INTERLUX UNDERWATER METAL PRIMER 360R; allow a minimum of 3 hours for the first coat to dry, 6 hours for the second and overnight for the third. Apply two coats of bottom paint.

* This is a simple system for small areas. For a more advanced, professional system, please consult the INTERLUX Technical Department, P.O. Box 386, Union, NJ 07083.

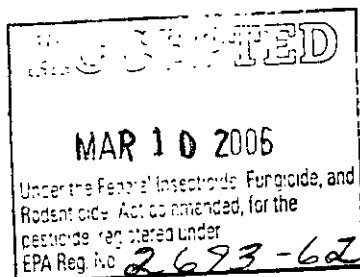

6 7 8

[Alternate Directions for Use for Pleasure Craft]

PRODUCT DESCRIPTION: This product is a hard modified epoxy antifouling paint that has been developed to provide effective season-long protection and ease of application. This product is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. This product can be used in fresh, salt and brackish waters.

COMPATIBILITY: This product can be applied over most other antifouling paints provided they are adhering well to the surface and the surface has been cleaned and sanded. This product can be applied by brush, roller or spray.

V.O.C.: Less than 408 grams/liter
(3.34 lbs./gallon)
THINNER: Interlux® Special Thinner 216 or
Interlux® Brush Ease 433
CLEAN-UP: Interlux® Special Thinner 216 or
Interlux® Brush Ease 433

THEORETICAL COVERAGE: 400 sq. ft./ gallon
yields 2 mils dry film thickness
THINNING: Thin only when necessary.
Do not exceed 10% maximum.
APPLICATION TEMPERATURE: 50°F (10°C)*
and above (air and hull)

ESTIMATED DRY TIMES:

Temperature F°/C°	Touch Dry	Overcoating Time		Launch Time	
		Minimum*	Minimum	Maximum	Maximum
50°F (10°C)	3 hrs	6 hrs	12 hrs	60 days	60 days
60°F (15°C)	2 hrs	5 hrs	10 hrs	60 days	60 days
75°F (24°C)	1 hr	4 hrs	8 hrs	60 days	60 days
95°F (35°C)	30 Min	2 hrs	6 hrs	60 days	60 days

*If the air temperature falls below 50°F (10°C) during the 10 hour dry time, extend the dry times to 36 hours minimum.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED - GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit sandpaper, wipe surface clean with Special Thinner 216. Apply at least two coats of this product.

PREVIOUSLY PAINTED - POOR CONDITION: Completely remove all old antifouling paint using Interstrip® 299E for fiberglass and wood, and by sandblasting to near white metal for steel. Follow application system for bare work below

BARE FIBERGLASS (POLYESTER OR VINYLESTER)

SURFACE PREPARATION: Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following methods:

The preferred method of cleaning gelcoat is to apply Fiberglass Surface Prep YMA601 with a maroon, 3M, Scotch-Brite® pad and scrub well. Flush with fresh water or wipe off with a clean, wet cloth ensuring that no traces of Fiberglass Surface Prep remain.

An alternate method would be to dampen cheesecloth with Interlux Fiberglass Solvent Wash 202. Wipe thoroughly to remove all surface contamination and cleaners. Wipe off with a clean, dry rag before liquid dries. Wipe only a few square feet at a time and change rags frequently. To be certain the contamination has been removed, run water over the surface. If the water beads up or separates, repeat one of the above methods. When the water sheets off, all contamination has been removed. Sanding does not remove contamination

After the surface has been properly cleaned, proceed with the application system below.

BARE FIBERGLASS - NO SAND SYSTEM: After the surface has been prepared as described above - apply one thin continuous coat of Interlux Fiberglass No Sand Primer YPA200. Please refer to label directions for application. Allow appropriate dry time and apply the first coat of this product.

ACCEPTED
MAR 10 2006
Under the Federal Insecticide, Fungicide
Rodenticide, Act as amended, for the
pesticide, registered under
EPA Reg. No. 2693-62


BARE FIBERGLASS - SANDING SYSTEM: After the surface has been prepared as described above - Sand entire surface well with 80-grit sandpaper until flat matte finish is obtained. Remember to change sandpaper frequently. Wipe off sanding residue with Fiberglass Solvent Wash 202. Sand and wipe clean. Apply two coats of this product allowing for appropriate dry times.

BARE FIBERGLASS - NO SAND SYSTEM: Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux® Watertite or Interfill Epoxy Filler. Sand and wipe clean. Apply one thin, continuous coat of Interlux® No-Sand Primer YPA200 by brush or roller. **DO NOT SPRAY, DO NOT SAND.** Follow label instructions, and apply the first coat of this product.

BARE FIBERGLASS - SANDING SYSTEM: Clean the surface following the preparation procedure above. Sand the entire surface with 80-grit sandpaper and wipe clean with Fiberglass Solvent Wash 202 to remove sanding residue. Repair any surface imperfections with Watertite or Interfill Epoxy Filler. Sand and wipe clean. Apply two coats of this product allowing for appropriate dry times.

BARE WOOD: Sand the entire surface with 80-grit sandpaper; wipe surface clean with Interlux® Special Thinner 216. Repair imperfections with Watertite or Interfill Epoxy Filler. Sand and wipe clean. Apply the first coat of this product thinned 10% with Special Thinner 216 or Brush Ease 433. Fill seams with Interlux® Seam Compound 30 (if necessary). Apply two more coats of this product unthinned, allowing the appropriate dry times.

UNDERWATER METALS: Contact the Interlux® Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. **DO NOT USE ON ALUMINUM.**

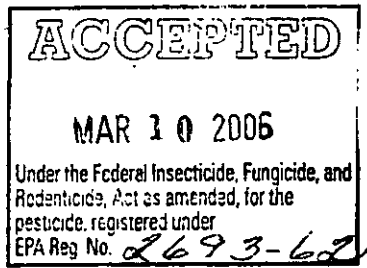

[Alternate Directions for Use for Commercial Vessels]

This product is an antifouling protective coating resistant to algae, barnacles and other marine fouling.

SURFACE PREPARATION AND COMPATIBILITY: Surface preparation directions must be followed exactly in order to ensure adhesion. Surface must always be clean and dry prior to painting.

GENERAL APPLICATION PROCEDURES: Airless spray is recommended. Tip Size 21-26 thou. inch pump ratio of 30:1 or greater. For small areas, brush or roller may be used, but multiple coats may be required to achieve the required dry film thickness. It is recommended to apply by airless spray one (1) or two (2) full coats of this product.

MIXING AND THINNING INSTRUCTIONS: Mix thoroughly with power mixer prior to application. This coating is designed to be applied without thinning. Should thinning be necessary, consult your International representative prior to altering this coating.

CLEANUP: For tools, equipment, etc., use International GTA007.

MINIMUM DRY AND LAUNCHING TIMES: Minimum drying time between coats is 6 hours, and before launching is 12 hours at a temperature of 73°F.

THEORETICAL COVERAGE: 380 square feet per gallon, per coat at 2.0 mils D.F.T. Consult your International representative for practical application coverages. Practical square foot coverage per gallon, per coat is directly proportional to surface application techniques and climatic conditions.

APPLICATION SYSTEMS

EXISTING ANTIFOULING SYSTEMS – GOOD CONDITION: High pressure fresh water wash with a minimum 2500 p.s.i. and/or scrape to remove all marine growth, slime, salts, etc. Spot blast all areas of corrosion to a Near White Metal Standard of SSPC-SP10-85. Blow down with clean and dry high pressure air to remove spent abrasives. Apply an approved underwater anticorrosive system.

POOR CONDITION: For "optimum" results, blast entire area to a Near White Metal Standard SSPC-SP-10-85. Apply an approved underwater anticorrosive system.

NEW BUILDING: Blast entire area to a Near White Metal Standard SSPC-SP10-85. Blow down with clean, dry high pressure air to remove all spent abrasives. Apply an approved underwater anticorrosive system.

WOOD AND NON-FERROUS SURFACES: Use surface preparation and primers as specified by the Navy.

