


2693-64

1/19/71

PS 1/63

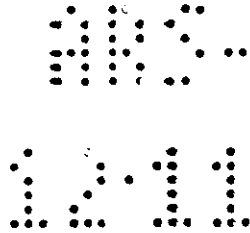


Directions for use

STIRRING—Contents of cans must be thoroughly stirred from the bottom, both before and during use. Special and careful attention is directed to this point, as it is of the greatest importance that the stirring should be thoroughly done if the results are to be satisfactory.

APPLICATION — Thoroughly remove all loose and perished paint from the bottom by scraping and brooming. When the surface is dry, apply one coat followed by a second coat when the first is dry. The painting should be done three or four hours before putting the boat overboard, in no case should a lapse of days be allowed.

Two or three coats can be applied in one day if necessary. Allow 3 or 4 hours drying between coats.




TRADE MARK REG. U. S. PAT. OFF.


ACCERTED

JAN 19 1971

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
ED. UNDER NO. 1692-64

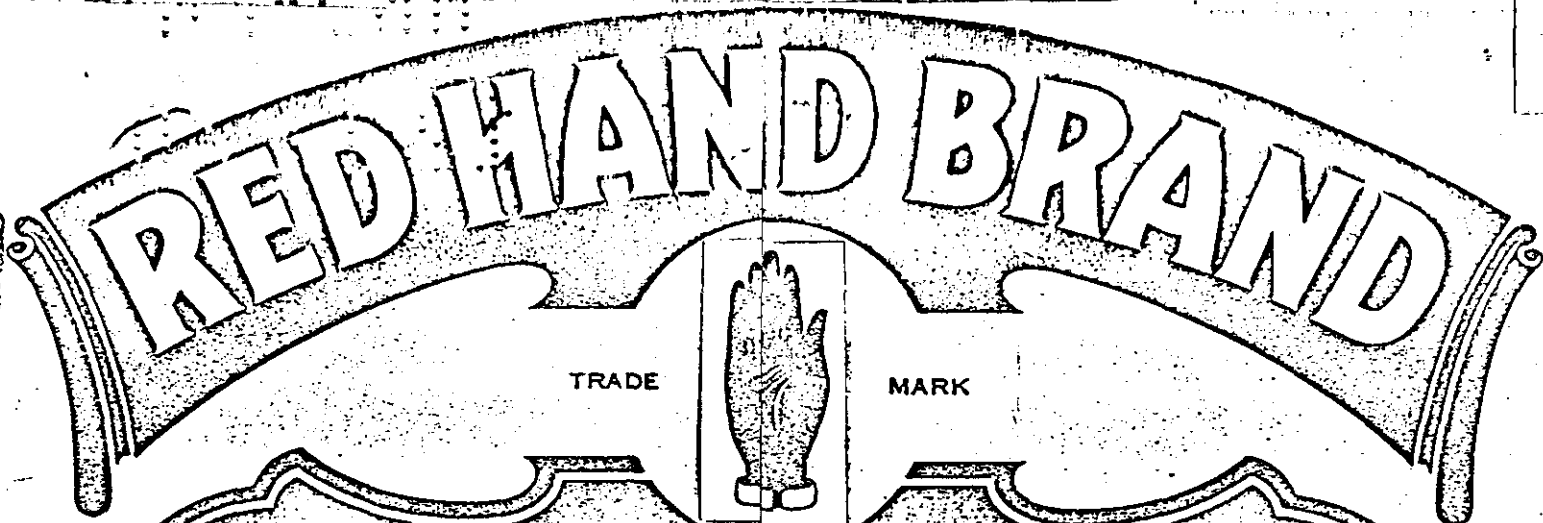

TRADE MARK

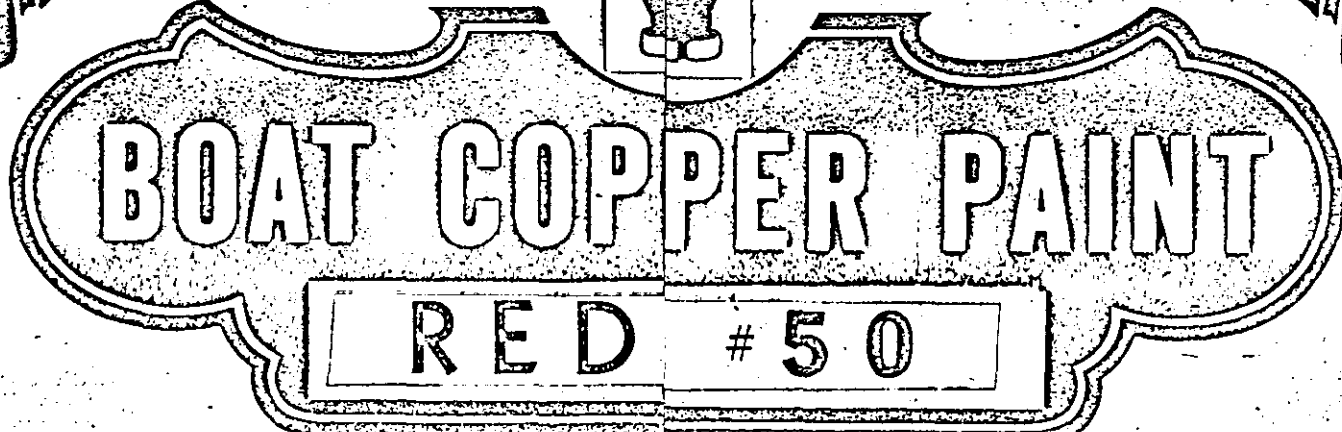

Protects against marine worms and effectively prevents the attachment of algae (grass)

Active Ingredient	
* Cuprous Oxide.....	21.84%
Inert Ingredients.....	78.16%
	100.00%
* Elemental Metal—	19.3%

WARNING!
KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

USDA REG. No. 2693-64

ONE U.S. GALLON

International Paint Company, Inc.

NEW YORK, N.Y. 10006 - SAN FRANCISCO, CALIF. 94080 - NEW ORLEANS, LA 70126

293

**RED HAND BRAND
BOAT COPPER PAINT**

*for the Bottoms of
Wooden Craft*

— MUST NOT BE USED ON STEEL —

WARNING

Harmful if swallowed. Do not use or store near heat or open flame.

Use with adequate ventilation.

Avoid contact with skin and breathing of vapor or spray mist. Close container after each use.

