

Directions for use

BOAT COPPER PAINT is an economy grade antifouling paint suitable for application to wood, steel and fiberglass. It is especially formulated for application to fishing boats, work boats and general marine usage.

DIRECTIONS

FOR WOODEN BOTTOMS — NEW WORK

Reduce with 10% of 216 "INTERLUX" SPECIAL THINNER for application of the first coat. Apply second and third coats unreduced. Allow 5 hours drying time between coats and launch within 24 hours after application of final coat.

FOR WOODEN BOTTOMS — OLD WORK

Remove all traces of loose paint, dirt, grease, etc. Sand the existing paint film well and apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — NEW WORK

Freshly sandblasted steel should be conditioned with a thin coat of 353/4 VINY-LUX PRIMEWASH. Allow to dry for one hour and then apply 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER allowing 3 hours, 6 hours and overnight for drying between coats and before coating over.

Next apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — OLD WORK

Scrape and wire brush to remove all rust, scale or loosely adhering paint. Touch up bare spots with 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER followed by 2 coats of BOAT COPPER PAINT.



FOR FIBERGLASS BOTTOMS

Wipe fiberglass thoroughly with 202 "INTERLUX" FIBERGLASS SOLVENT WASH to remove mold release agent, and apply 1 coat 200 "INTERLUX" FIBERGLASS PRIMER. After 2-3 hours drying time apply 2 coats BOAT COPPER PAINT.

OR

Sand surface thoroughly with coarse sandpaper until a uniform flat finish is obtained. Clean surface with 216 "INTERLUX" SPECIAL THINNER to remove all grit, residue, etc., and allow to dry.

Apply 1 coat of 347 "INTERLUX" "PRIMOCON" SILVER. Allow a minimum of 4 hours, and a maximum of 24 hours drying time, and then apply 2 coats of BOAT COPPER PAINT.

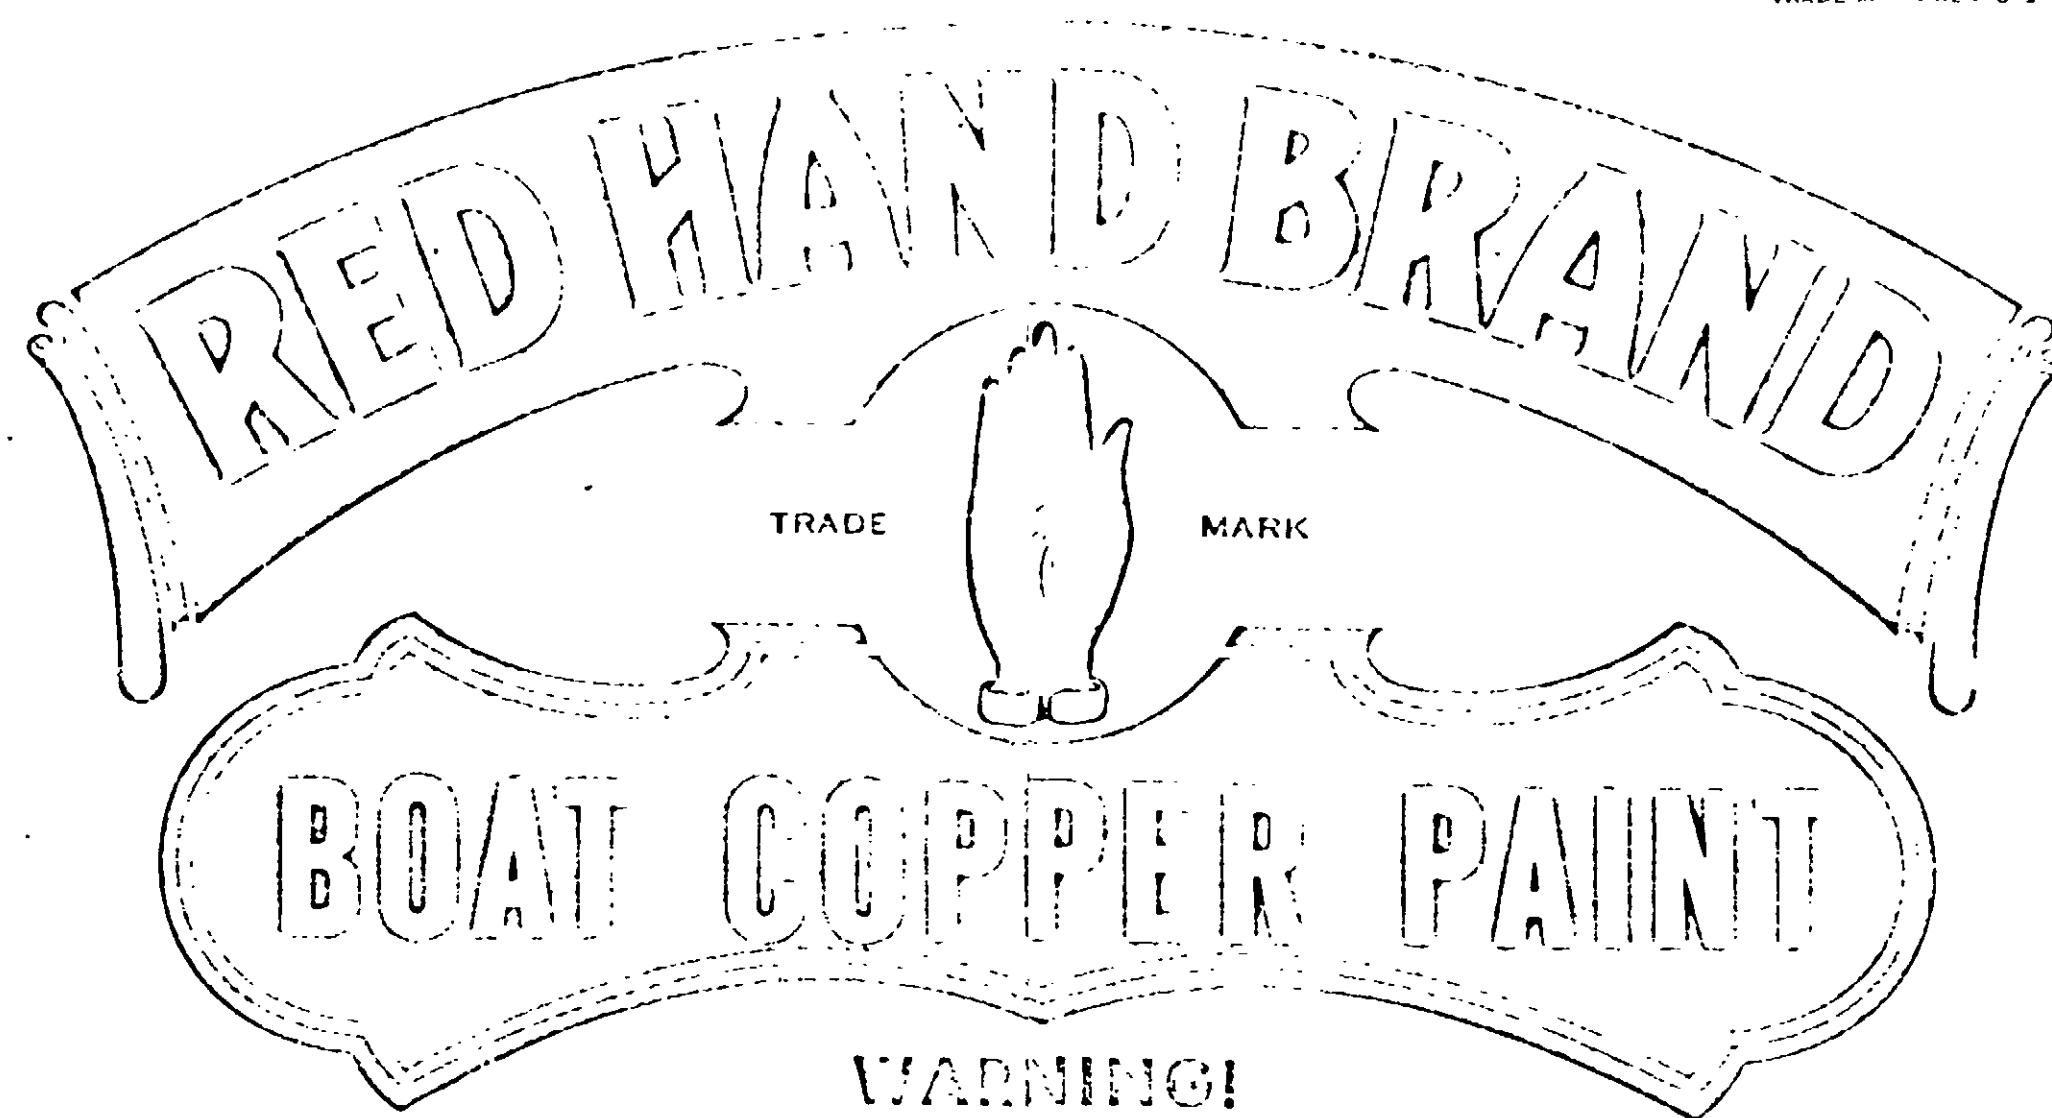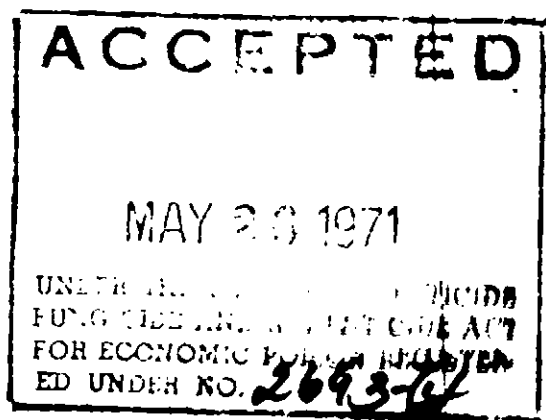


WARNING!
KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

Active Ingredient	
Cuprous Oxide	21.84%
Inert Ingredients	78.16%
	100.00%
Elemental Metal—	19.3%

RED # 50

U.S.D.A. REG. NO. 2693-64

NET ONE U.S. GALLON



International Paint Company, Inc.

NEW YORK, N.Y. 10006 SAN FRANCISCO, CALIF. 94104 NEW ORLEANS, LA 70112

Directions for use

BOAT COPPER PAINT is an anti-fouling paint suitable for application to wood, steel and fiberglass. It is especially formulated for application to fishing boats, work boats and general marine usage.

DIRECTIONS

FOR WOODEN BOTTOMS — NEW WORK

Reduce with 10% of 216 "INTERLUX" SPECIAL THINNER for application of the first coat. Apply second and third coats undiluted. Allow 5 hours drying time between coats and launch within 24 hours after application of final coat.

FOR WOODEN BOTTOMS — OLD WORK

Remove all traces of loose paint, dirt, grease, etc. Sand the existing paint film well and apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — NEW WORK

Freshly sandblasted steel should be conditioned with a thin coat of 353/4 VINYLUX PRIMEWASH. Allow to dry for one hour and then apply 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER allowing 3 hours, 6 hours and overnight for drying between coats and before coating over.

Next apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — OLD WORK

Scrape and wire brush to remove all rust, scale or loosely adhering paint. Touch up bare spots with 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER followed by 2 coats of BOAT COPPER PAINT.



FOR FIBERGLASS BOTTOMS

Wipe fiberglass thoroughly with 202 "INTERLUX" FIBERGLASS SOLVENT WASH to remove mold release agent, and apply 1 coat 200 "INTERLUX" FIBERGLASS PRIMER. After 2-3 hours drying time apply 2 coats BOAT COPPER PAINT.

OR

Sand surface thoroughly with coarse sandpaper until a uniform finish is obtained. Clean surface with 216 "INTERLUX" SPECIAL THINNER to remove all grit, residue, etc. Allow to dry.

Apply 1 coat of 347 "INTERLUX" "PRIMOCON" SILVER. Allow a minimum of 4 hours, and a maximum of 24 hours drying time, and then apply 2 coats of BOAT COPPER PAINT.

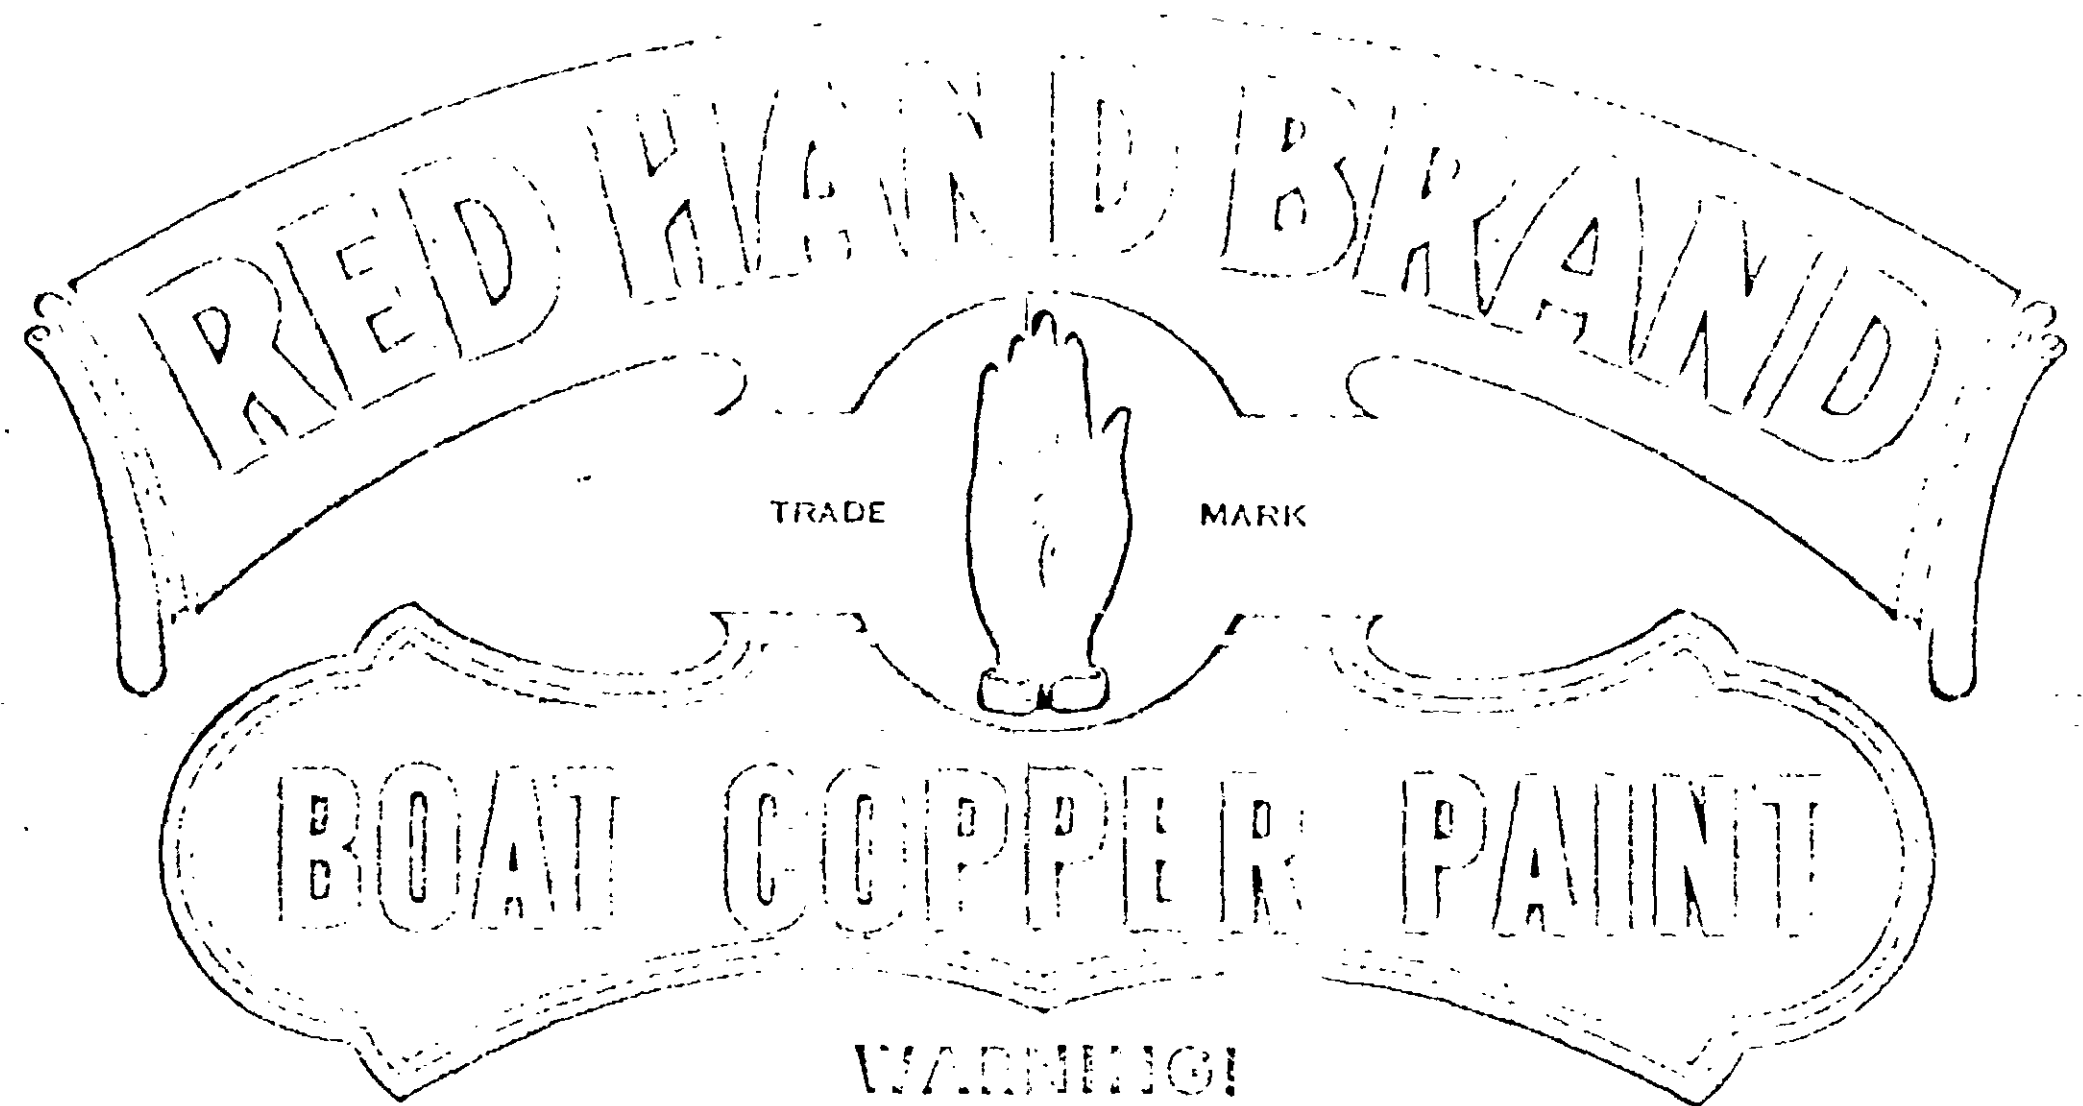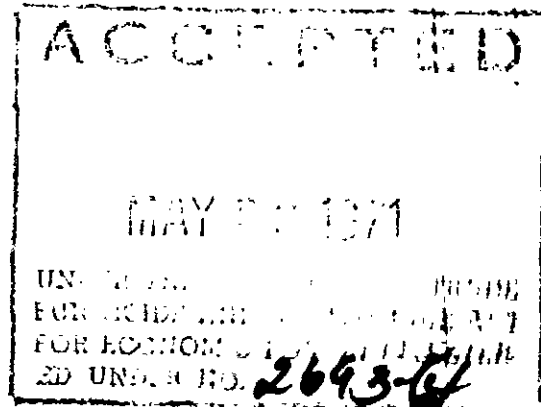

WARNING!
KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

Active Ingredient	
Cuprous Oxide	21.84%
Inert Ingredients	78.16%
	100.00%
Elemental Metal—	19.3%


RED #50


U.S.D.A. REG. NO. 2693-64

NET ONE U.S. GALLON

International Paint Company, Inc.

NEW YORK, N.Y. 10006 • SAN FRANCISCO, CALIF. 94104 • PHOENIX, ARIZ. 85001 • LOS ANGELES, CALIF. 90001



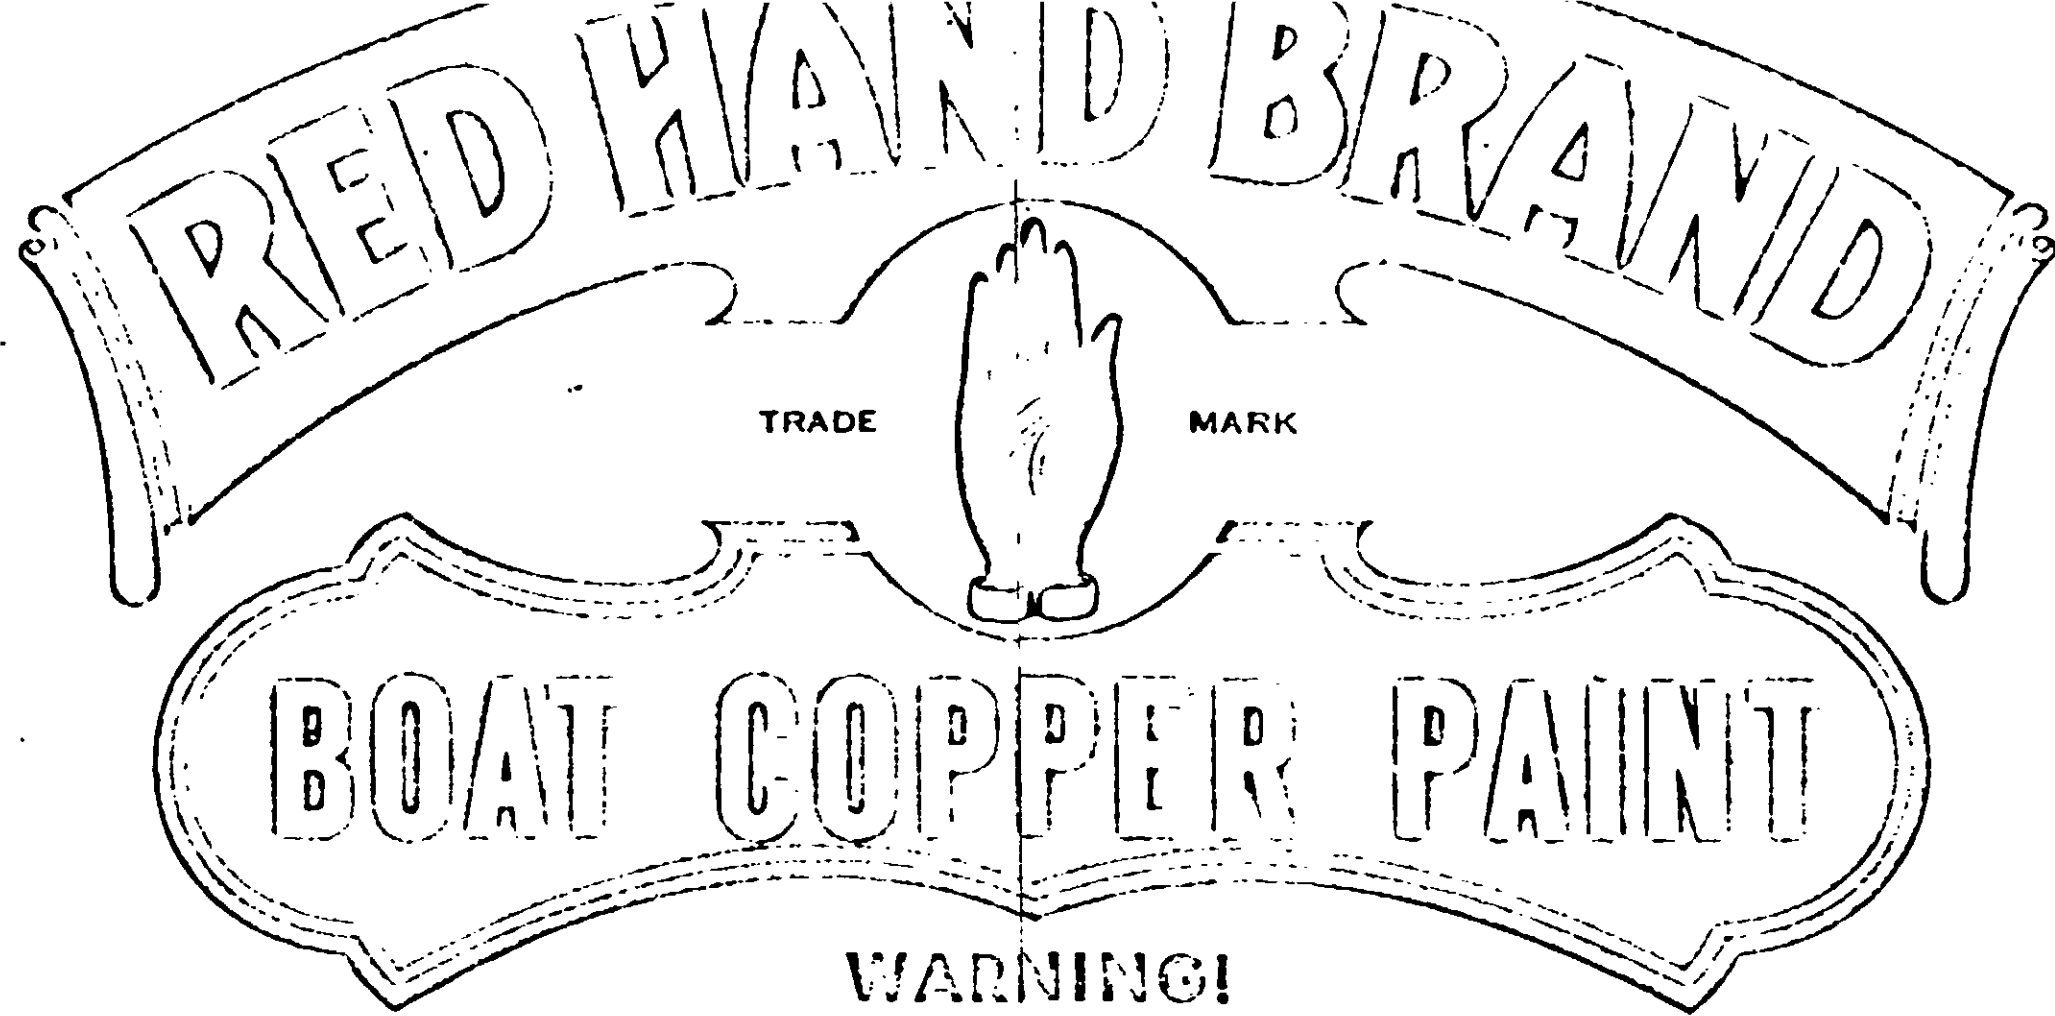

WARNING!

KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

RED # 50

U.S.D.A. REG. NO. 2693-64

NET ONE U.S. GALLON

International Paint Company, Inc.

NEW YORK, N.Y. 10006 SAN FRANCISCO, CALIF. 94104 NEW ORLEANS, LA. 70126

**RED HAND BRAND
BOAT COPPER PAINT**


*for the Bottoms of
Wood, Steel &
Fiberglass Craft*

WARNING

Harmful if swallowed. Do not use or store near heat or open flame.

Use with adequate ventilation.

Avoid contact with skin and breathing of vapor or spray mist. Close container after each use.



ent
ide21.84%
ts78.16%
100.00%
al-19.3%