

International Red Hand



WARNING!

Harmful if swallowed. May be absorbed through the skin. May cause irritation. Do not get in eyes, on skin or on clothing. In case of skin contact, remove contaminated clothing and immediately wash with soap and water; for eyes, immediately flush with water. If irritation persists, get medical attention. Wash contaminated clothing before re-use. Do not contaminate or store near feed or foodstuffs.

When Using Spray Application Methods

Workers must wear protective clothing. Use complete face shield with respirator, rubber gloves, long sleeves, hat or cap. Cover the skin completely. Spray men should be equipped with air line respirators in lieu of mouth type in addition to the other protective devices. Clothes should be thrown away or laundered before re-use. Do not eat, drink or smoke while working.

When it is necessary to weld or burn, remove paint three inches on each side of weld or furnish welder with an air fed respirator.

FOR USE BY
COMMERCIAL OR PROFESSIONAL
APPLICATORS ONLY

WIDE SPECTRUM ANTIFOULING

GRAY MARK I 3201


ACTIVE INGREDIENTS	Percent
TRIBUTYL TIN FLUORIDE	14.9%
INERT INGREDIENTS	85.1%
<hr/>	
ELEMENTAL TIN	5.66%
<hr/>	
	100.0%

U.S.D.A. Reg. No. 2693-68

NET ONE U.S. GALLON

International Paint Company, Inc.

NEW YORK 10017 • PHOENIX 44002 • LOS ANGELES 90008 • MEMPHIS 38103 • ST. LOUIS 63103

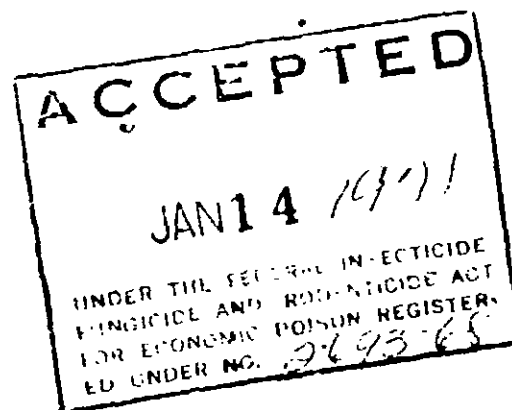

DIRECTIONS

MIXING

THOROUGHLY MIX BEFORE USING BY STIRRING AND BY POURING FROM ONE CONTAINER INTO ANOTHER SEVERAL TIMES. RESTIR FREQUENTLY DURING APPLICATION.

APPLICATION

THE SURFACE TO BE PAINTED MUST BE CLEAN, FREE FROM RUST, GREASE, LOOSE PAINT AND MOISTURE.

THIS PAINT IS MADE IN READY-TO-USE CONSISTENCY AND SHOULD REQUIRE NO THINNERS. HOWEVER, IF THINNING IS NECESSARY, USE SPARINGLY.

WE SHALL UPON REQUEST SUPPLY SPECIFIC INSTRUCTIONS RELATING TO THE APPLICATION OF OUR PRODUCTS.

