

"TRI-LUX" ANTI-FOULING PAINTS

② "TRI-LUX" ANTI-FOULING PAINTS utilize organo-tin as an antifoulant. "TRI-LUX" ANTI-FOULING PAINTS will not cause pitting due to galvanic attack even if aluminum is scratched to bare metal during use.

DIRECTIONS

WOOD—Apply two to three coats of "TRI-LUX" ANTI-FOULING PAINT to bare wood. Wood should be dry and clean before application of paint.

FIBERGLASS—Wipe fiberglass thoroughly with 202 "INTERLUX" FIBERGLASS SOLVENT WASH to remove mold release and apply one coat 200 "INTERLUX" FIBERGLASS PRIMER. After overnight drying time apply two coats "TRI-LUX" ANTI-FOULING PAINT.

OR

Sand fiberglass thoroughly with 80 Grit Production Paper. Wipe surface clean with 355 VINYLUX SOLVENT. Apply two coats of "TRI-LUX" ANTI-FOULING PAINT.



ALUMINUM—Roughen surface with medium grit Emery Cloth to a uniform bright finish. Wipe surface with a clean cloth wet with 216 "INTERLUX" SPECIAL THINNER until all residue is removed. Apply one coat of 353/354 VINYLUX PRIME-WASH. (This step is absolutely necessary in order to obtain proper adhesion of the "TRI-LUX" PAINTS.) Follow with two coats of "TRI-LUX" ANTI-FOULING PAINT of the desired color.

ALUMINUM YACHTS— 25 FEET AND OVER - Ask your "TRI-LUX" representative for application directions.

Except when "TRI-LUX" PAINTS are applied over themselves, or to another known vinyl type paint in good condition, they should always be applied to bare surfaces or recommended primed surfaces.

⑤ Under normal painting conditions, "TRI-LUX" FINISHES may be overcoated within four hours of application. "TRI-LUX" ANTI-FOULING PAINTS need not be immediately immersed after painting. Several days, or even weeks, may transpire before launching. However, because the paint film will deteriorate to some extent when exposed to atmospheric exposure, it is wise to keep the boat in the water, or under cover, to protect the paint film.

To clean brushes and equipment, or to replace solvent that may be lost due to evaporation, use 355 VINYLUX SOLVENT. Use a good quality natural bristle brush for application of "TRI-LUX" ANTI-FOULING PAINTS.

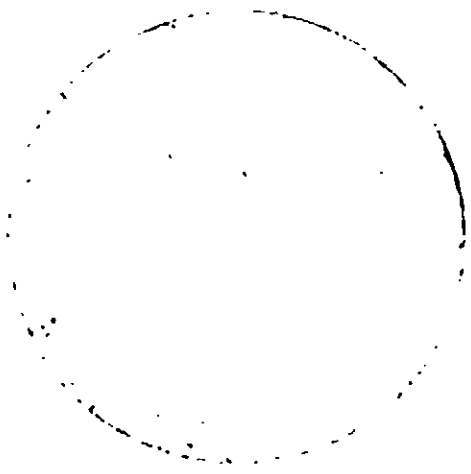

ACCEPTED
 ALSO FOR
 FOR USE IN
 ED UNDER NO. 2693-79

ACTIVE INGREDIENT ①	PERCENT
TRIBUTYL TIN FLUORIDE	13.8 %
INERT INGREDIENTS	86.2 %
	100.0 %
ELEMENTAL TIN--	5.25 %

International
 Paints

ONE U.S. GALLON

DANGER!

KEEP OUT OF REACH OF CHILDREN
 See other warnings on back panel

Tri-LUX[®]
 VINYL-BASE PAINT
 CONTAINS
 BiOMET[™]

Antifouling Paint

64

WIDE SPECTRUM RED (TBTF)

MARK I


U.S.P.A. REG. NO. 2693-79

International Paint Company, Inc.

NEW YORK, N.Y. 10001 • NEW BRUNSWICK, N.J. 08901 • NEW HAVEN, CT 06511 • NEW YORK, N.Y. 10001

Cameraman's Note

Poor Copy

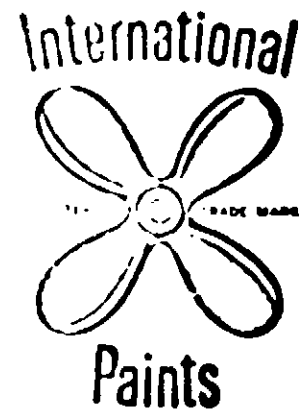

ONE U.S. GALLON

DANGER!

KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

Tri-LUX[®]
VINYL-BASE PAINT
CONTAINS
bioMET[™]

Antifouling Paint

64

WIDE SPECTRUM RED (TBTF)

MARK I

U.S.D.A. REG. NO. 2693-79

FACTORIES

U.S.A.	UNION, N. J.	HOLLAND	RIJSWIJK
U.S.A.	SAN FRANCISCO	ITALY	GENOVA
U.S.A.	NEW ORLEANS	ITALY	TRIESTE
AUSTRALIA	SYDNEY	MEXICO	MEXICO CITY
BRAZIL	RIO DE JANEIRO	NEW ZEALAND	AUCKLAND
CANADA	MONTREAL	NEW ZEALAND	WELLINGTON
CANADA	REGINA	NIGERIA	IKEJA
CANADA	VANCOUVER	NORWAY	BERGEN
DENMARK	COPENHAGEN	PORTUGAL	SETUBAL
ENGLAND	FELLING-ON-TYNE	SCOTLAND	GLASGOW
FRANCE	ROUEN	SPAIN	BILBAO
GERMANY	HAMBURG	SWEDEN	GOTHENBURG
		VENEZUELA	MARACAIBO

⑦ DANGER!

May be fatal if Swallowed. May be absorbed through skin. Causes skin irritation. Do not spray; apply by brush only.

Use with adequate ventilation.

Do not get in eyes, on skin, or clothing. In case of skin contact remove contaminated clothing and immediately wash skin with soap and water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. For eyes, flush with plenty of water and get medical attention. Avoid storage near food and food products. Flammable. Keep away from heat and open flame. Close container after each use.

⑧ Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

PERCENT
DE 13.8 %
86.2 %
100.0 %

International Paint Company, Inc.

NEW YORK, N.Y. 10001 • SAN FRANCISCO, CALIF. 94104 • NEW ORLEANS, LA. 70112 • AUCKLAND, N.Z. 1010

