

BLANK 75/8" x 20 13/16"

ACCEPTED  
Aug-18-1971  
EPA UNDER NO. 2693  
TO ATTRACTIVE COATING 84

TOP

Directions for use

BOAT COPPER PAINT is a heavy grade antifouling paint for use on the hulls of steel and fiberglass boats. It is also suitable for application to fishing boats, watercraft and other marine usage.

DIRECTIONS

FOR WOODEN BOTTOMS — NEW WORK

Prepare with 216 "INTERLUX" SPECIAL THINNER for preparation of the first coat. Apply second and third coats at reduced. Allow 5 hours drying time between coats. Allow overnight dry before launching.

FOR WOODEN BOTTOMS — OLD WORK

Remove all traces of loose paint, dirt, grease, etc. Sand the existing paint film well and apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — NEW WORK

First a surface of steel should be conditioned with a thin coat of 353 4 VINYLUX PRIMEWASH. Allow to dry for one hour and then apply 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER at 3 hours, 6 hours and overnight for drying between coats and before coating over. Next apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — OLD WORK



Scrape and wire brush to remove all rust, scale or loosely attached paint. Touch up bare spots with 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER followed by 2 coats of BOAT COPPER PAINT.

FOR FIBERGLASS BOTTOMS

Wipe fiberglass thoroughly with 202 "INTERLUX" FIBERGLASS SOLVENT WASH to remove mold release agent, and apply 2 coats of 200 "INTERLUX" FIBERGLASS PRIMER. After 2 hours drying time apply 2 coats BOAT COPPER PAINT.

OR

Sand surface thoroughly with coarse sandpaper until a smooth surface is obtained. Clean surface with 216 "INTERLUX" SPECIAL THINNER to remove all grit, residue, etc. Allow to dry. Then apply 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER. Allow to dry for 24 hours between coats. Finally apply 2 coats of BOAT COPPER PAINT.

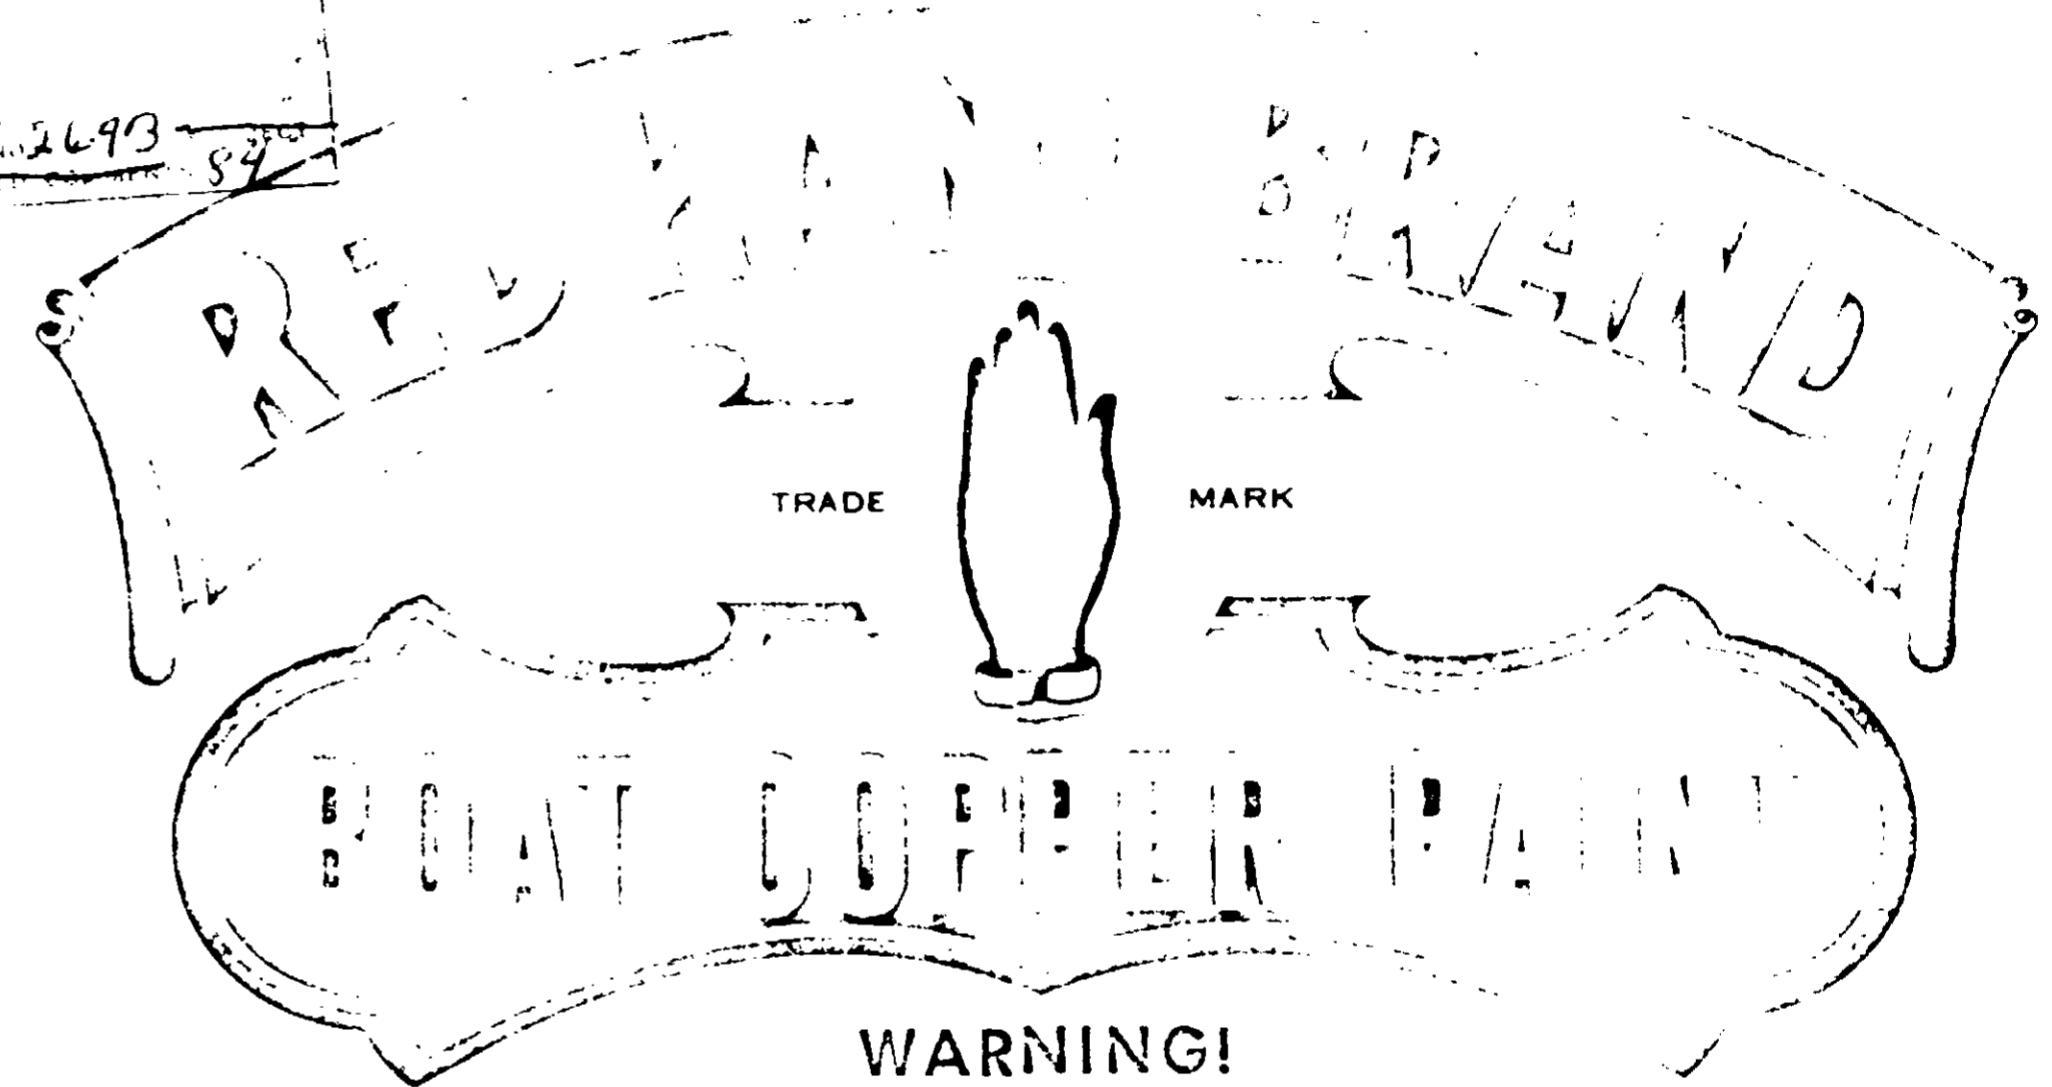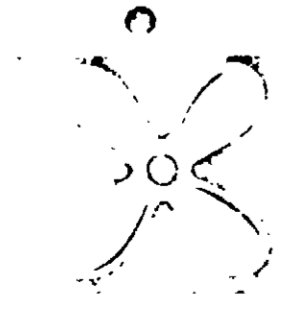

WARNING!


KEEP OUT OF REACH OF CHILDREN  
See other warnings on back panel

ACTIVE INGREDIENTS	PERCENT
CUPROUS OXIDE -----	21.3 %
INERT INGREDIENTS -----	78.7 %
	100.0 %
ELEMENTAL COPPER --	18.8 %

48 GREEN

U.S.D.A. Reg. No. 2693-84

NET ONE U.S. GALLON

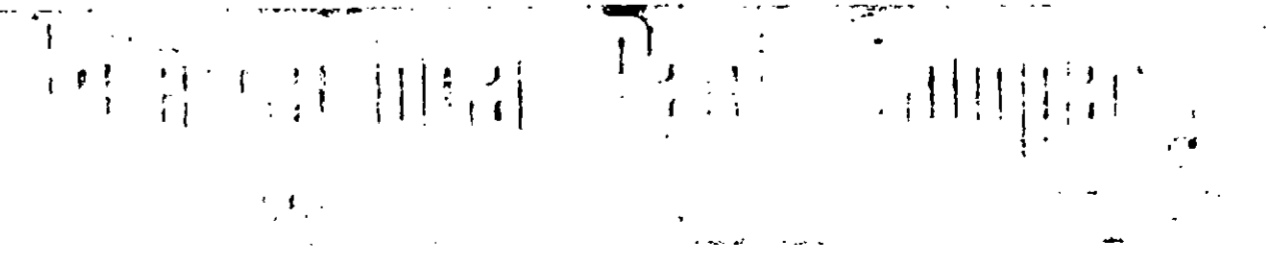


ACCEPTED

Aug-18-1971

2693 54

TOP

TRADE MARK - REG. U.S. PAT. OFF.

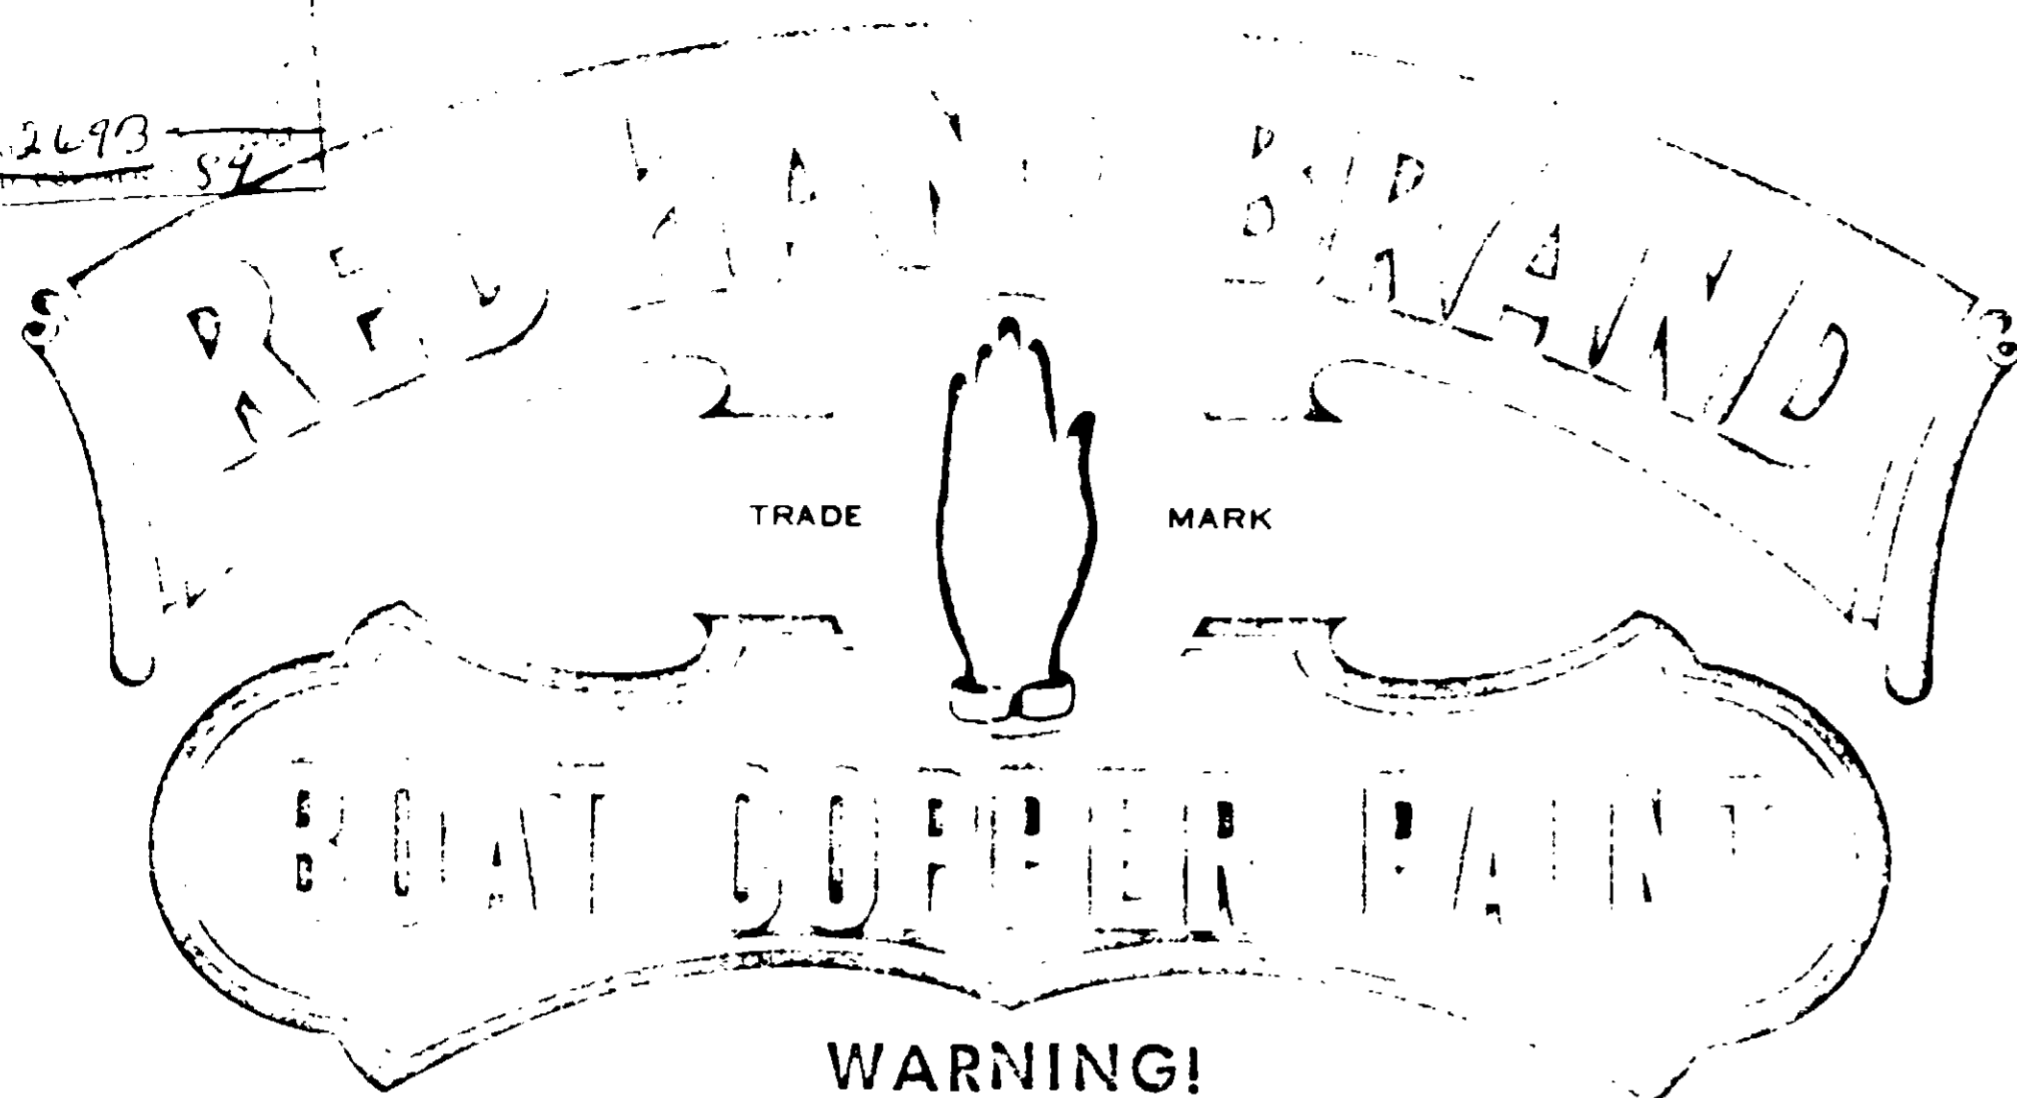

**WARNING!**

KEEP OUT OF REACH OF CHILDREN

See other warnings on back panel

INGREDIENTS	PERCENT
COPPER OXIDE -----	21.3 %
INGREDIENTS -----	78.7 %
	<hr/> 100.0 %
COPPER --	18.8 %

**48 GREEN**

U.S.D.A. Reg. No. 2693-84

**NET ONE U.S. GALLON**

## RED HAND BRAND BOAT COPPER PAINT

*for the Bottoms of  
Wood, Steel &  
Fiberglass Craft*

### WARNING

Harmful if swallowed. Do not use or store near heat or open flame.

**Use with adequate ventilation.**

Avoid contact with skin and breathing of vapors or spray mist. Close container after each use.

**Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.**

