

Directions for use

BOAT COPPER PAINT is an economy grade antifouling paint suitable for application to wood, steel and fiberglass. It is especially formulated for application to fishing boats, work boats and general marine use. Allow 5 hours drying time between coats and launch within 24 hours after application of final coat.

FOR WOODEN BOTTOMS — NEW WORK

Reduce with 10% of 216 "INTERLUX" SPECIAL THINNER for application of the first coat. Apply second and third coats unreduced. Allow 5 hours drying time between coats and launch within 24 hours after application of final coat.

FOR WOODEN BOTTOMS — OLD WORK

Remove all traces of loose paint, dirt, grease, etc. Sand the existing paint film well and apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — NEW WORK

Freshly sandblasted steel should be conditioned with a thin coat of 353/4 VINYLUX PRIMEWASH. Allow to dry for one hour and then apply 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER allowing 3 hours, 6 hours and overnight for drying between coats and before coating over. Next apply 2 coats of BOAT COPPER PAINT.

FOR STEEL BOTTOMS — OLD WORK

Scrape and wire brush to remove all rust, scale or loosely adhering paint. Touch up bare spots with 3 coats of 347 "INTERLUX" "PRIMOCON" SILVER followed by 2 coats of BOAT COPPER PAINT.


FOR FIBERGLASS BOTTOMS

Wipe fiberglass thoroughly with 202 "INTERLUX" FIBERGLASS SOLVENT WASH to remove mold release agent, and apply 1 coat 200 "INTERLUX" FIBERGLASS PRIMER. After 2-3 hours drying time apply 2 coats BOAT COPPER PAINT.

OR

Sand surface thoroughly with coarse sandpaper until a uniform flat finish is obtained. Clean surface with 216 "INTERLUX" SPECIAL THINNER to remove all grit, residue, etc., and allow to dry.

Apply 1 coat of 347 "INTERLUX" "PRIMOCON" SILVER. Allow a minimum of 4 hours, and a maximum of 24 hours drying time, and then apply 2 coats of BOAT COPPER PAINT.

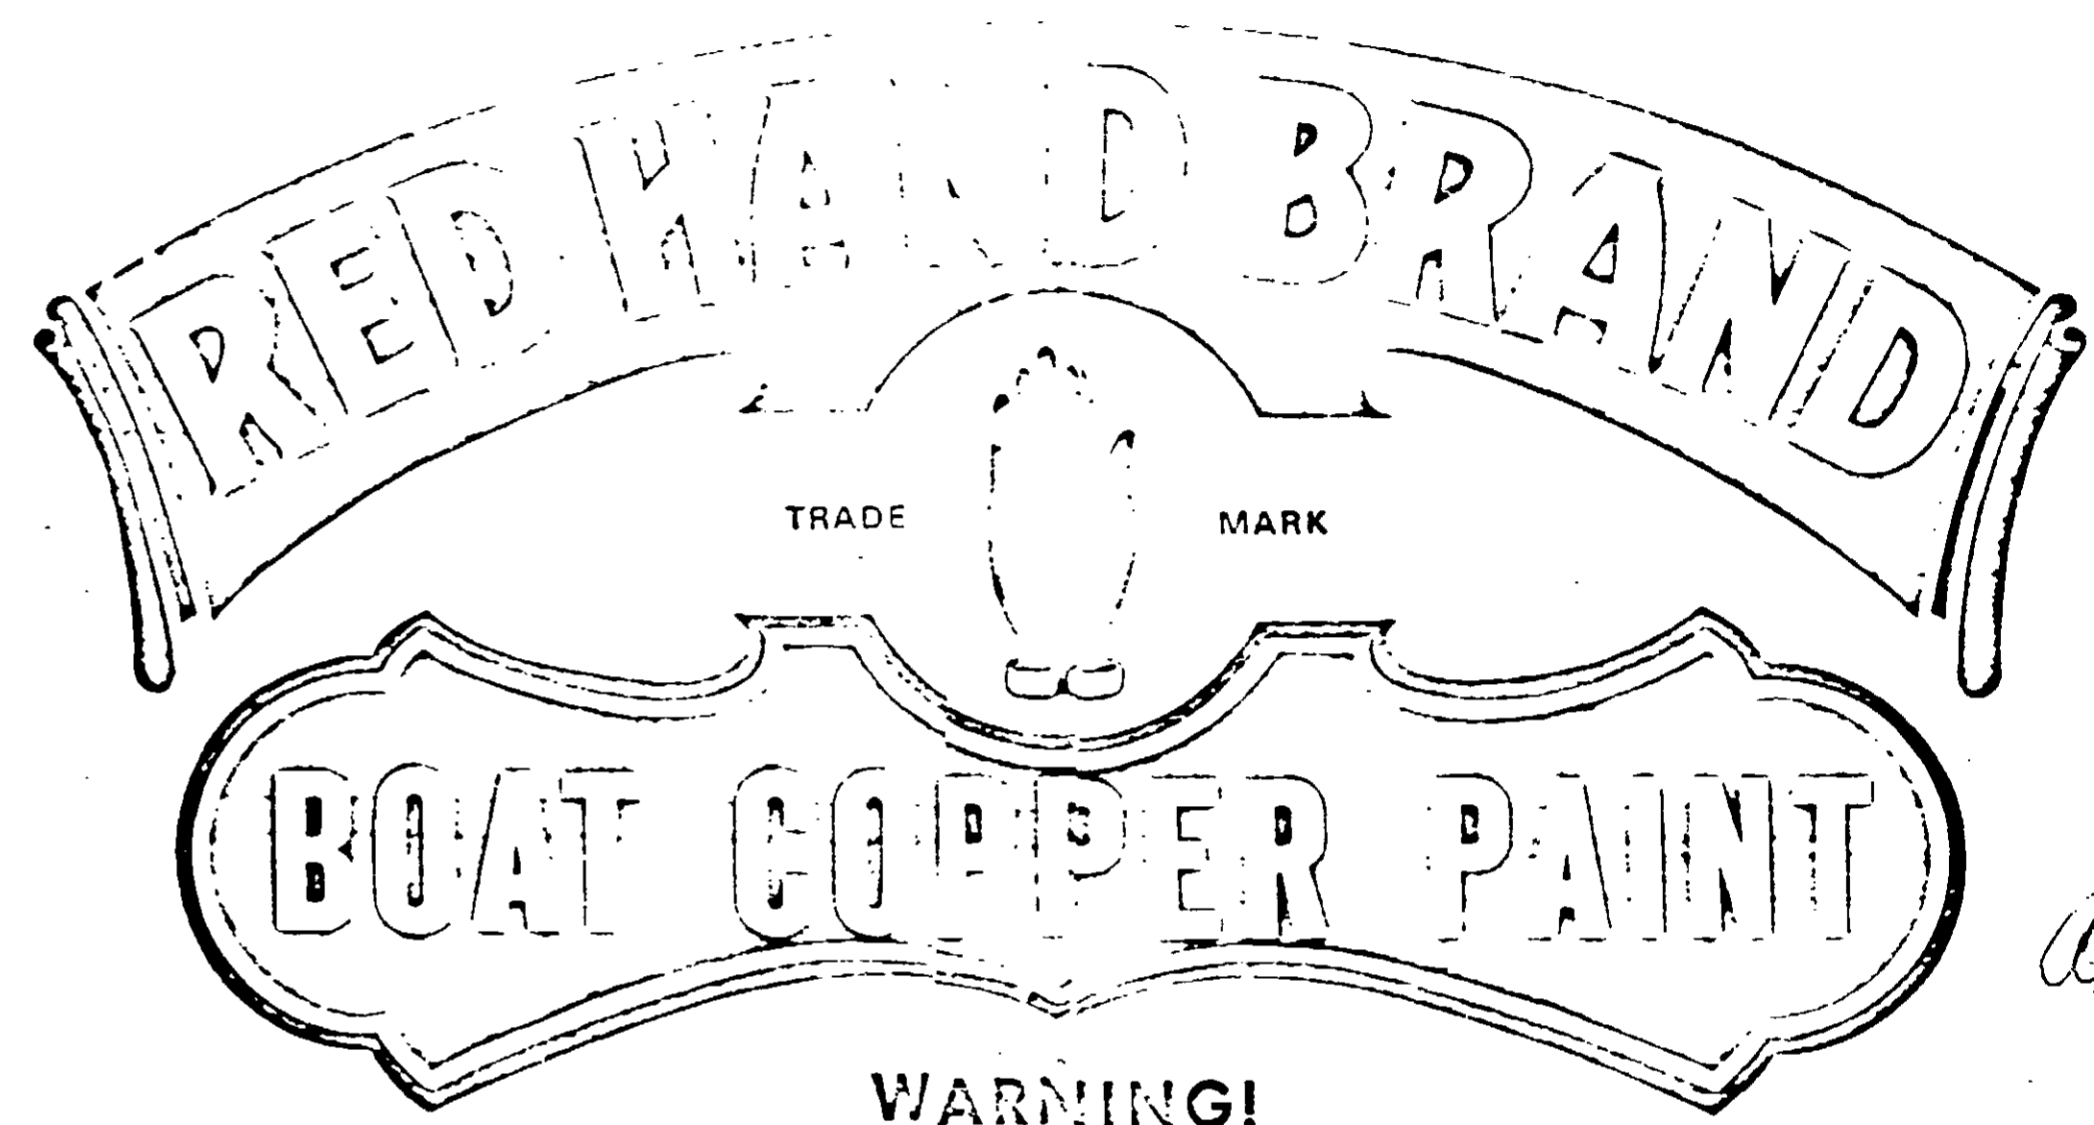


WARNING!
KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

Active Ingredient	
Cuprous Oxide	21.3%
Inert Ingredients	78.7%
	<hr/>
	100.00%
Elemental Metal--	18.8%

72 BLUE

E.P.A. REG. NO. 2693-90


NET ONE U.S. GALLON



Camoraman's Note
Poor Copy

International Paint Company, Inc.
New York, N.Y. 10017

TRADE MARK REG. U.S. PAT. OFF.

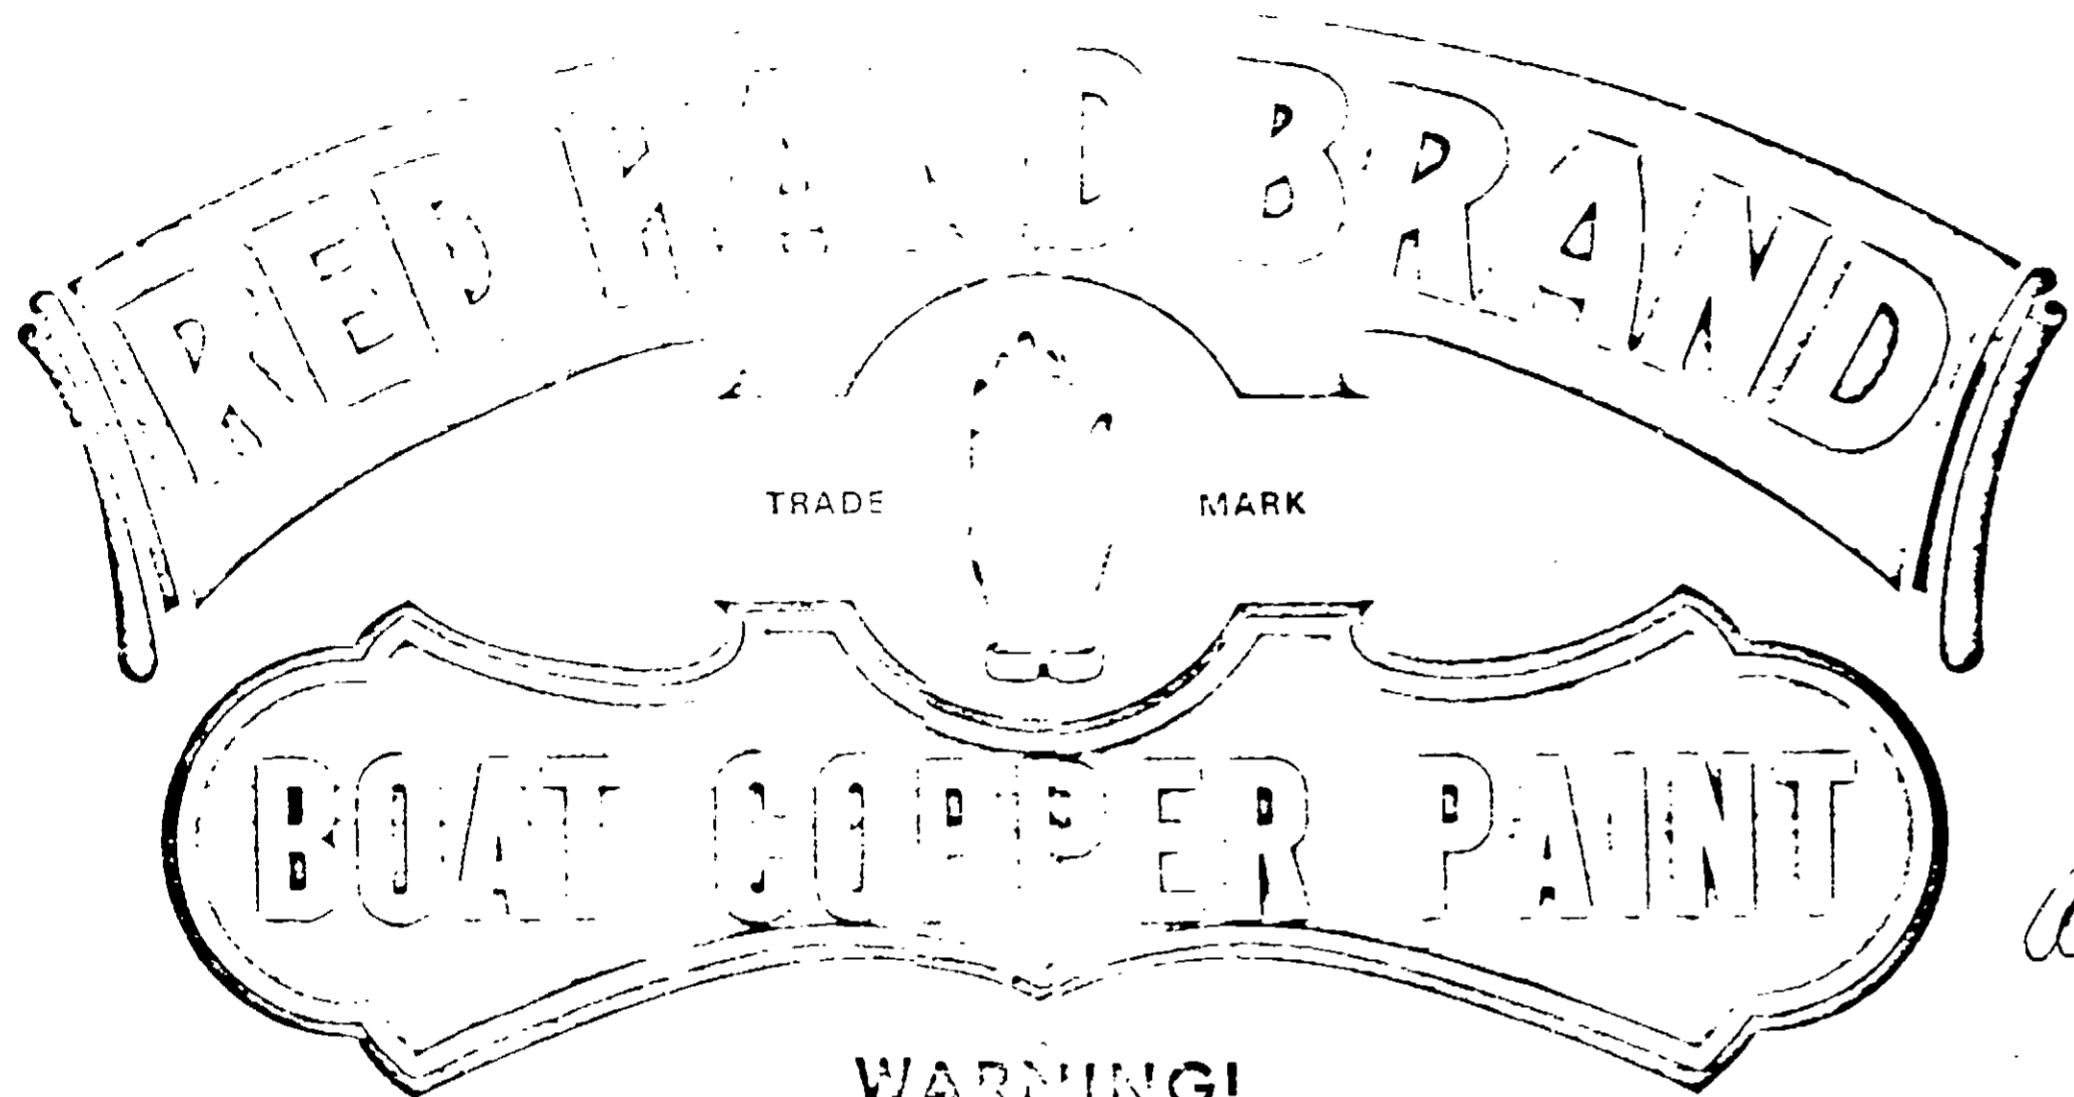

TRADE MARK

BOAT COPPER PAINT

WARNING!

KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

72 BLUE

E.P.A. REG. NO. 2693-90

NET ONE GAL. GALLON

Active Ingredient	21.3%
Cuprous Oxide	78.7%
Inert Ingredients	100.00%
Heavy Metals	18.8%

April 6, 1973
2643-90

**RED HAND BRAND
BOAT COPPER PAINT**

*for the Bottoms of
Wood, Steel &
Fiberglass Craft*

WARNING

Harmful if swallowed.
Do not use or store near heat or open flame.

Use with adequate ventilation.

Avoid contact with skin and breathing of vapor
or spray mist. Close container after each use.

Do not reuse empty container. Destroy it by
perforating or crushing. Bury or discard in a
safe place.

Do not contaminate water by clearing of copper
from disposal of wastes.



Red Hand Brand

United States Patent & Trademark Office