

"SUPERTROP" ANTIFOULING PAINT

An extra strong antifouling paint suitable for the protection of the bottoms of steel, wood and fiberglass boats.

DIRECTIONS

When applying "SUPERTROP" ANTIFOULING PAINT, allow overnight drying time between coats and launch within 72 hours after application of final coat. Paint should be dry to touch before immersion. If this schedule is not possible, launching may be delayed for several days provided the composition is not subjected to the direct rays of the sun. Overhardening of the composition before launching will affect in a deleterious manner initial antifouling paint protection.

PREVIOUSLY PAINTED SURFACES — If old finish is in good condition, "SUPERTROP" ANTIFOULING PAINT can usually be applied directly over it after a thorough sanding with medium grit paper. When in poor condition, remove old finish to bare surface and follow painting instructions as below.

BARE SURFACES — WOOD — Apply three coats to bare wood. No special primers are required.

FIBERGLASS — Sand surface thoroughly with 1/0, 80 Grit Production Paper. Apply one coat of 347 "INTERLUX" "PRIMOCON" SILVER followed by two coats of "SUPERTROP" ANTIFOULING PAINT.

STEEL — On steel vessels at least two coats of "SUPERTROP" ANTIFOULING PAINT should be applied over three priming coats of 347 "INTERLUX" "PRIMOCON" SILVER.

IMPORTANT — DO NOT INTERFERE WITH THE PROPER FUNCTIONING OF "SUPERTROP" ANTIFOULING PAINT BY ADDING DRIERS OR THINNERS.



ONE U.S. GALLON


WARNING!
KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

Supertrop

Antifouling Paint


45 BLUE

For Wood, Fiberglass
and Steel

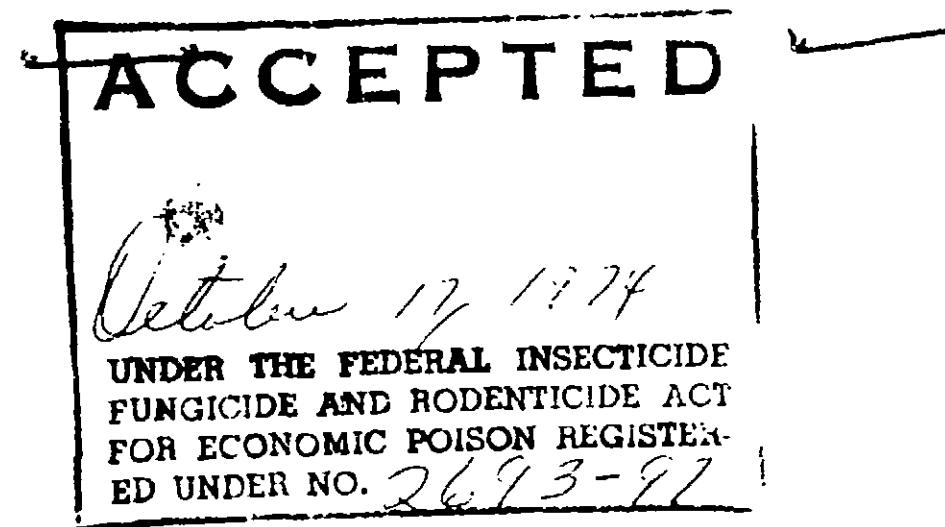

ACTIVE INGREDIENT	PER CENT
CUPROUS OXIDE	23.6%
INERT INGREDIENTS	76.4%
	<hr/> 100.0%
ELEMENTAL COPPER	20.9%

E. P. A. EST. 2693-N.J.-1

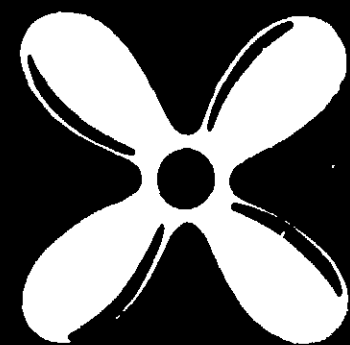

International Paint Company

NEW YORK N.Y. 10006 • SAN FRANCISCO CALIF. 94108 • NEW JERSEY

ONE U.S. GALLON

WARNING!

KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

ipertrop®

antifouling Paint

45 BLUE

For Wood, Fiberglass,
and Steel

FACTORIES

U.S.A.	UNION, N. J.	HOLLAND	RIJSWIJK
U.S.A.	SAN FRANCISCO	ITALY	GENOA
U.S.A.	NEW ORLEANS	ITALY	TRIESTE
AUSTRALIA	SYDNEY	MEXICO	MEXICO CITY
BRAZIL	RIO DE JANEIRO	NEW ZEALAND	AUCKLAND
CANADA	MONTREAL	NEW ZEALAND	WELLINGTON
CANADA	REGINA	NIGERIA	IKEJA
CANADA	VANCOUVER	NORWAY	BERGEN
DENMARK	COPENHAGEN	PORTUGAL	SETUBAL
ENGLAND	FELLING-ON-TYNE	SCOTLAND	GLASGOW
FRANCE	ROUEN	SPAIN	BILBAO
GERMANY	HAMBURG	SWEDEN	GOTHENBURG
		VENEZUELA	MARACAIBO

E. P. A. REG. NO. 2693-97

GUM ROSIN	25.8%
EPOXIDIZED SOYA BEAN OIL ...	3.2%
TITANIUM DIOXIDE	4.5%
PHTHALO BLUE	1.5%
MAGNESIUM SILICATE	20.3%
CUPROUS OXIDE	23.6%
MINERAL SPIRITS	21.1%
	<hr/> 100.0%

WARNING!


Harmful if swallowed. Do not use or store near heat or open flame. **Use with adequate ventilation.** Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

Do not contaminate water by cleaning of equipment or disposal of wastes.

ional Paint Company, Inc.

006 • SAN FRANCISCO, CAL. 94080 • NEW ORLEANS, LA. 70186

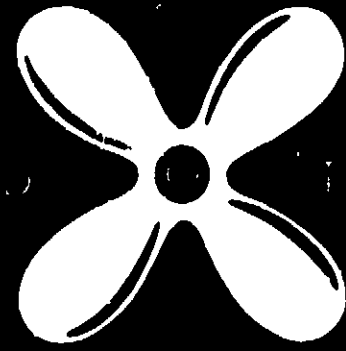

REGISTERED TRADE MARK