

## "TRI-LUX" ANTIFOULING PAINTS

"TRI-LUX" ANTIFOULING PAINTS utilize organo-tin as an antifoulant. "TRI-LUX" ANTIFOULING PAINTS will not cause pitting due to galvanic attack even if aluminum is scratched to bare metal during use.

### DIRECTIONS

**WOOD**—Apply two to three coats of "TRI-LUX" ANTIFOULING PAINT to bare wood. Wood should be dry and clean before application of paint.

**FIBERGLASS**—Wipe fiberglass thoroughly with 202 "INTER-LUX" FIBERGLASS SOLVENT WASH to remove mold release and apply one coat 200 "INTERLUX" FIBERGLASS PRIMER. After overnight drying time apply two coats "TRI-LUX" ANTI-FOULING PAINT.

OR

Sand fiberglass thoroughly with 80 Grit Production Paper. Wipe surface clean with 355 VINYLUX SOLVENT. Apply two coats of "TRI-LUX" ANTIFOULING PAINT.

**ALUMINUM**—Roughen surface with medium grit Emery Cloth to a uniform bright finish. Wipe surface with a clean cloth wet with 216 "INTERLUX" SPECIAL THINNER until all residue is removed. Apply one coat of 353/354 VINYLUX PRIME-WASH. (This step is absolutely necessary in order to obtain proper adhesion of the "TRI-LUX" PAINTS.) Follow with two coats of "TRI-LUX" ANTIFOULING PAINT of the desired color.

**ALUMINUM YACHTS—25 FEET AND OVER**—Ask your "INTER-LUX" representative for application directions.

Except when "TRI-LUX" PAINTS are applied over themselves, or to another known vinyl-type paint in good condition, they should always be applied to bare surfaces or recommended primed surfaces.

Under normal painting conditions, "TRI-LUX" FINISHES may be overcoated within four hours of application. "TRI-LUX" ANTIFOULING PAINTS need not be immediately immersed after painting. Several days, or even weeks, may transpire before launching. However, because the paint film will deteriorate to some extent when exposed to atmospheric exposure, it is wise to keep the boat in the water, or under cover, to protect the paint film.


To clean brushes and equipment, or to replace solvent that may be lost due to evaporation, use 355 VINYLUX SOLVENT. Use a good quality natural bristle brush for application of "TRI-LUX" ANTIFOULING PAINTS.

ACTIVE INGREDIENTS  
Tributyltin Fluoride  
INERT INGREDIENTS

PERCENT  
13.8%  
86.2%  
100.0%

ELEMENTAL TIN — 5.25%

International



Paints

ONE U.S. GALLON

**WARNING!**


**KEEP OUT OF REACH OF CHILDREN**

See other warnings on back panel

**Tri-Lux**  
VINYL-BASE PAINT  
CONTAINS  
bioMe  
*Antifouling Paint*

**61 WIDE SPECTRUM LIGHT BLUE  
MARK I (TBTF)**

E.P.A. REG. NO. 2693-102-AA

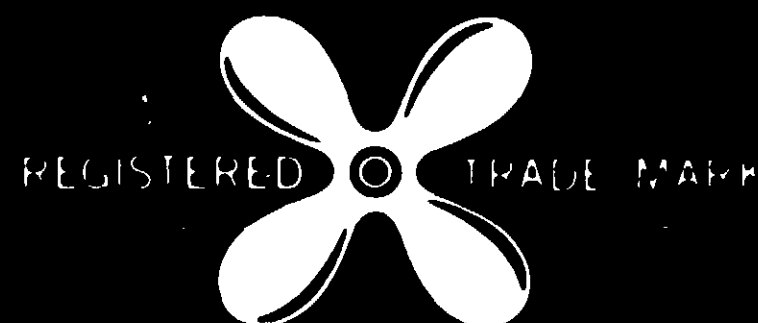

**International Paint Company**

NEW YORK, N.Y. 10004 • SAN FRANCISCO, CAL. 94080 • NEW ORLEANS, LA. 70112

International



Paints

ONE U.S. GALLON

**WARNING!**

**KEEP OUT OF REACH OF CHILDREN**

See other warnings on back panel

**Tri-lux®**  
**VINYL-BASE PAINT**

CONTAINS  
**bioMET™**

*Antifouling Paint*

**61 WIDE SPECTRUM LIGHT BLUE  
MARK I (TBTF)**

E.P.A. REG. NO. 2693-102-AA

**ACCEPTED**

**MAY 8 1975**

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act,  
as amended, for the pesticide  
registered under  
EPA Reg. No. 2693-102

|                                      |                |
|--------------------------------------|----------------|
| KETONES .....                        | 26.45%         |
| VINYL-ROBIN .....                    | 11.7 %         |
| TITANIUM DIOXIDE .....               | 9.8 %          |
| ZINC OXIDE .....                     | 6.8 %          |
| TRIBUTYL TIN<br>FLUORIDE (95%) ..... | 14.6 %         |
| PHTHALO BLUE .....                   | 1.1 %          |
| AROMATIC HYDROCARBON .....           | 29.55%         |
|                                      | <b>100.00%</b> |

**FACTORIES**

|           |                 |             |             |
|-----------|-----------------|-------------|-------------|
| U.S.A.    | UNION, N. J.    | HOLLAND     | RIJSWIJK    |
| U.S.A.    | SAN FRANCISCO   | ITALY       | GENOA       |
| U.S.A.    | NEW ORLEANS     | ITALY       | TRIESTE     |
| AUSTRALIA | SYDNEY          | MEXICO      | MEXICO CITY |
| BRAZIL    | RIO DE JANEIRO  | NEW ZEALAND | AUCKLAND    |
| CANADA    | MONTREAL        | NEW ZEALAND | WELLINGTON  |
| CANADA    | REGINA          | NIGERIA     | IKEJA       |
| CANADA    | VANCOUVER       | NORWAY      | BERGEN      |
| DENMARK   | COPENHAGEN      | PORTUGAL    | SETUBAL     |
| ENGLAND   | FELLING-ON-TYNE | SCOTLAND    | GLASGOW     |
| FRANCE    | ROUEN           | SPAIN       | BILBAO      |
| GERMANY   | HAMBURG         | SWEDEN      | GOTHENBURG  |
|           |                 | VENEZUELA   | MARACAIBO   |

EPA EST. 2693-NJ-1

**WARNING**

May be fatal if Swallowed. May be absorbed through skin.  
Causes skin irritation. Do not spray; apply by brush only.

**Use with adequate ventilation.**

Do not get in eyes, on skin, or clothing. In case of skin contact remove contaminated clothing and immediately wash skin with soap and water. If irritation persists, get medical attention. Wash contaminated clothing before re-use. For eyes, flush with plenty of water and get medical attention. Avoid storage near food and feed products. Flammable. Keep away from heat and open flame. Close container after each use.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

Do not contaminate water by cleaning of equipment, or disposal of wastes.

**International Paint Company, Inc.**

ORR, N. Y. 10004 • SAN FRANCISCO, CAL. 94080 • NEW ORLEANS, LA 70186

