

**"62c" INTERLUX ANTIFOULING  
BOTTOM PAINT RED**

An excellent coating of extra strong antifouling properties which is for use on the underwater section of STEEL and WOODEN vessels.

**DIRECTIONS**

Stir the paint well and keep it stirred.

"62c" INTERLUX ANTIFOULING BOTTOM PAINT RED will not settle hard in the can and, therefore, can be easily mixed right in the container.


When applying "62c" INTERLUX ANTIFOULING BOTTOM PAINT RED it is recommended that, where circumstances permit, the last coat be allowed at least two hours to harden before the yacht is launched. It is also suggested that the launching take place within five hours after final application. However, the launching may safely be delayed for several days if, during this time, care is taken that the composition is not subjected to the direct rays of the sun. It is unwise to leave antifouling paints exposed to the air for long periods. Painting is often done between tides and it is then that the quick drying of "62c" INTERLUX ANTIFOULING BOTTOM PAINT RED will be helpful.

For WOOD vessels, "62c" INTERLUX ANTIFOULING BOTTOM PAINT RED is made with properties which allow for its application directly to bare wood. No special primers are required. Apply at least three coats on new work. Allow 5 hours drying time between coats.

On STEEL vessels apply 3 coats 347 "PRIMOCON" SILVER allowing 3 hours, 6 hours and overnight drying between coats. Then apply two coats of "62c" INTERLUX ANTIFOULING BOTTOM PAINT RED allowing 5 hours drying time between coats.

**IMPORTANT:—DO NOT INTERFERE WITH THE PROPER FUNCTIONING OF "62c" INTERLUX ANTIFOULING BOTTOM PAINT RED BY ADDING ANY DRIERS OR THINNER.**

APPROXIMATE COVERAGE on average surfaces is 400 sq. ft. per gallon, 2 coats.

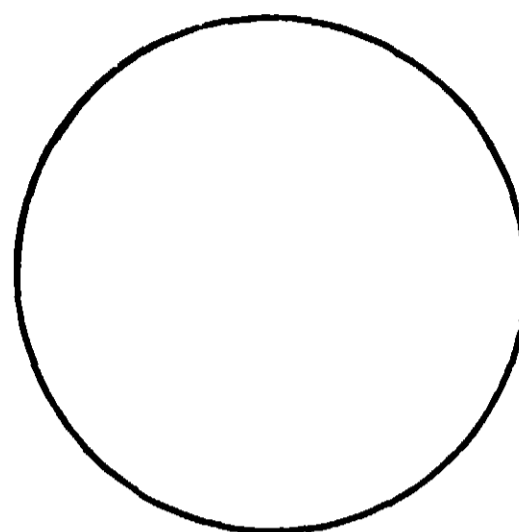

ACTIVE INGREDIENTS	PERCENT
CUPROUS OXIDE	38.0%
INERT INGREDIENTS	62.0%
	<hr/>
ELEMENTAL COPPER — 33.7%	100.0%


**NET ONE U. S. GALLON**

**WARNING!**  
**KEEP OUT OF REACH OF CHILDREN**  
See other warning on back panel



**Interlux**  
**ANTIFOULING**  
**"62c"**

**BOTTOM PAINT**

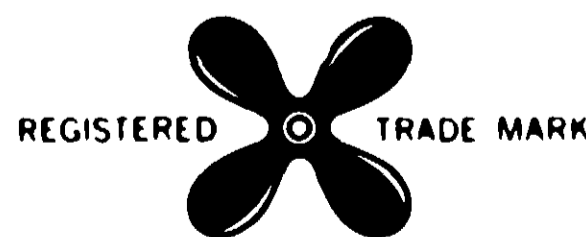

**International Paint Company., (I)**  
NEW YORK, N. Y. 10004 • SAN FRANCISCO, CAL. 94080 • NI


NET ONE U.S. GALLON

**WARNING!**  
KEEP OUT OF REACH OF CHILDREN  
See other warning on back panel



**Interlux®**  
ANTIFOULING  
"62C"

**BOTTOM PAINT RED**

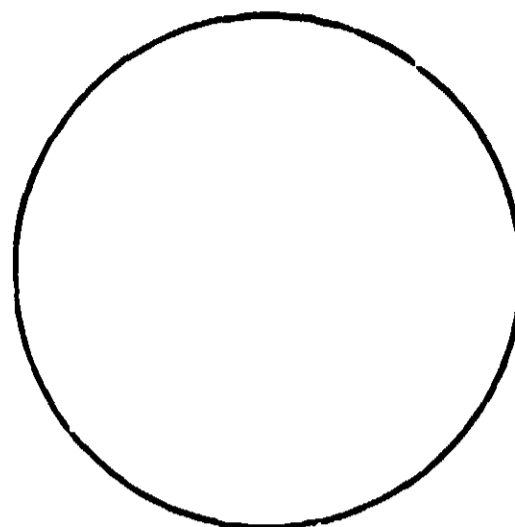

**ACCEPTED**  
APR 30 1975  
Under the Federal Insecticide,  
Fungicide, and Rodenticide Act,  
as amended, for the pesticide  
registered under  
EPA Reg. No. 2693-103

E.P.A. EST. 2693-CA-1

E.P.A. REGISTRATION NO. 2693-103AA

EPA EST. 2693-NJ-1

**FACTORIES**

U.S.A. .... UNION, N.J.	HOLLAND .... RIJSWIJK
U.S.A. .... SAN FRANCISCO	ITALY .... GENOA
U.S.A. .... NEW ORLEANS	ITALY .... TRIESTE
AUSTRALIA .... SYDNEY	MEXICO .... MEXICO CITY
BRAZIL .... RIO DE JANEIRO	NEW ZEALAND .... AUCKLAND
CANADA .... MONTREAL	NEW ZEALAND .... WELLINGTON
CANADA .... REGINA	NIGERIA .... IKEJA
CANADA .... VANCOUVER	NORWAY .... BERGEN
DENMARK .... COPENHAGEN	PORTUGAL .... SETUBAL
ENGLAND .... FELLING-ON-TYNE	SCOTLAND .... GLASGOW
FRANCE .... ROUEN	SPAIN .... BILBAO
GERMANY .... HAMBURG	SWEDEN .... GOTHENBURG
	VENEZUELA .... MARACAIBO

**WARNING!**

Harmful or Fatal if swallowed. Do not use or store near heat or open flame. **Use with adequate ventilation.** Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

Do not contaminate water by cleaning of equipment or disposal of wastes.

**International Paint Company., (California), inc.**  
NEW YORK, N.Y. 10004 • SAN FRANCISCO, CAL. 94080 • NEW ORLEANS, LA. 70186

