



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

March 11, 2019

Bathsheba Njuguna
PSRA Team Leader
International Paint LLC
6001 Antoine Drive
Houston, TX 77091

Subject: Label Amendment – Updating the precautionary statements and the use directions
Product Name: Super Bottomkote 456 Red
EPA Registration Number: 2693-119
Application Date: 3/06/2019
Decision Number: 548798

Dear Ms. Njuguna:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6.

The following alternate brand names are being added:

- SUPER FIBERGLASS BOTTOMKOTE BLUE 455
- SUPER FIBERGLASS BOTTOMKOTE BLACK 457
- ULTRA-KOTE Y3779U BLACK
- ULTRA-KOTE Y3669U BLUE
- ULTRA-KOTE Y3449U RED
- ULTRA-KOTE

The following alternate brand names are being removed:

- SUPER BOTTOMKOTE #467 BROWN
- SUPER BOTTOMKOTE #466 GREEN
- SUPER FIBERGLASS BOTTOM KOTE MIDNIGHT GRAY #468

If you have any questions, you may contact Aline Heffernan at 703-347-8602 or via email at heffernan.aline@epa.gov.

Sincerely,



Eric Miederhoff
Product Manager 31
Regulatory Management Branch I
Antimicrobials Division (7510P)
Office of Pesticide Programs

Enclosure: Stamped Label

Super Bottomkote 456 Red

- Serious Protection for Heavy Fouling Areas
 - For Fiberglass, Wood or Steel Power Boats
 - Excellent Protection for Severe Fouling Areas
 - Hard Scrubbable Finish
-

Alternative Brand Names (ABNs)

[SUPER BOTTOMKOTE #457 BLACK]
[SUPER FIBERGLASS BOTTOMKOTE]
[SUPER FIBERGLASS BOTTOMKOTE 455 BLUE]
[SUPER FIBERGLASS BOTTOMKOTE 456 RED]
[SUPER FIBERGLASS BOTTOMKOTE 457 BLACK]
[ULTRA-KOTE]
[ULTRA-KOTE Y3449U Red]
[ULTRA-KOTE Y3669U Blue]
[ULTRA-KOTE Y3779U Black]
[SUPER FIBERGLASS BOTTOMKOTE BLACK 457]
[SUPER FIBERGLASS BOTTOMKOTE BLUE 455]

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)


EPA Registration No. 2693-119
EPA Establishment No. 2693-TX-1

Active Ingredient:

Cuprous Oxide	=	57.00%
CAS #1317-39-1		
Other Ingredients:	=	$\frac{43.00\%}{100.00\%}$
Elemental Copper:	=	50.6%

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of International Paint LLC, including the surface preparation, proper application and the environmental conditions. Therefore, International Paint LLC cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of the product buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at the discretion of International Paint LLC.

International Paint LLC
6001 Antoine Drive
Houston, Texas 77091

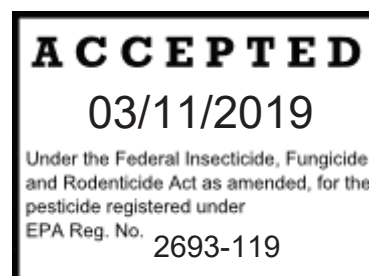

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

WARNING

May be fatal if swallowed or inhaled. Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. Do not breathe vapor or spray mist. While painting or sanding or sandblasting boat surfaces, wear a NIOSH approved particulate filter with any N, R, P filter with NIOSH approval number prefix TC-84A.; or a NIOSH approved powered air purifying respirator with an HE filter with NIOSH approval number prefix TC-21C. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID	
If Swallowed:	<ul style="list-style-type: none"> • Call a poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
If inhaled:	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. • Call a poison control, center or doctor for further treatment advice.
If in eyes:	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
If on skin or clothing:	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
<p>Have the product container or label with you when calling a poison control center or doctor or going for treatment. For medical emergencies, call the poison control center at 1-800-222-1222. For general information on this product, contact the National Pesticides Information Center (NPIC) at 1-800-858-7378, Monday through Friday, 8 AM to 12 PM PST, or at http://npic.orst.edu.</p>	

ENVIRONMENTAL HAZARD

This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System [NPDES] permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

STORAGE: Exposure to air and extremes of temperature must be avoided. Keep the container firmly closed. Keep out of direct sunlight. Keep the containers in a dry, cool, well ventilated space and away from sources of heat and ignition.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

[Subset A – Directions for Use for Pleasure Craft]

[SUPER BOTTOMKOTE, Ultra-Kote, Super Proguard, Super KL]

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

[SUPER BOTTOMKOTE, Ultra-Kote, Super Proguard, Super KL] Antifouling Paint is highly loaded with antifouling ingredients to resist fouling under the most severe conditions. It is especially recommended for southern waters where fouling conditions prevail on a “year around” basis. Because of its epoxy resin modification and high copper content, it is a tough, durable coating which can be applied several weeks before launching without fear of losing its effectiveness. [SUPER BOTTOMKOTE, Ultra-Kote, Super Proguard, Super KL] is well suited for application to large motor sailers and cruising power boats.

GENERAL DESCRIPTION

[SUPER BOTTOMKOTE, Ultra-Kote, Super Proguard, Super KL] is a hard, durable, high performance antifouling paint for use in moderate to severe fouling areas. Designed for maximum performance, this product provides excellent long-term protection from shell fouling such as barnacles. The fast-dry formula allows the boat to be painted and launched in the same day. Ultra-Kote has the added benefit of excellent color stability and can be used on fiberglass, wood or properly primed steel or lead. For use in fresh, salt, and brackish waters.

GENERAL PREPARATION: Surface must ALWAYS be clean and dry prior to painting. After sanding ALWAYS wipe surface clean with [Interlux Special Thinner 216, Interlux Special Thinner, Special Thinner] to remove sanding residue.

GENERAL APPLICATION: Can be brushed or rolled over all other antifouling bottom paints, on fiberglass, wood and steel surfaces (per application systems below) – EXCEPT aluminum. Apply TWO coats.

MIXING INSTRUCTIONS: Shake or mix well and stir continuously while using.

THINNING INSTRUCTIONS: When brushing or rolling, do not thin bottom paints – EXCEPT for the first coat on bare wood.

DRY TIMES BEFORE: OVERCOATING – 4 hours at 73°F (23 °C)
LAUNCHING – Minimum 8 hours at 73°F (23 °C)

THEORETICAL COVERAGE: 506 square feet per gallon

CLEAN-UP: Use [Interlux Special Thinner 216, Interlux Special Thinner, Special Thinner, Brush Ease 433, Brush Ease] for cleaning brushes and tools.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED FIBERGLASS & WOOD: Remove all traces of loose paint and surface contamination. Sand thoroughly with [80-120 Grit Production Paper, 80 grit sand paper] wipe surface clean. Apply two coats of antifouling paint.

NEW FIBERGLASS – No Sand Method: Wash entire surface with [Fiberglass Surface Prep YMA601V, Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep] with a [brown, maroon, brown or maroon 3M Scotchbrite pad to scrub] the surface followed by a cleaning with fresh water to remove wax and dirt, repair scratches and dents with [Interlux Watertite epoxy filler, Interfill epoxy filler]; sand and clean repaired areas. Apply one coat [Interlux InterProtect 2000E, Interlux InterProtect HS, InterProtect 2000E, InterProtect HS, InterProtect] to ensure paint adhesion follow overcoat times prior to applying two coats of antifouling paint.

Sanding Method: Clean entire surface with [Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep] with a [brown, maroon, brown or maroon 3M Scotchbrite pad to scrub] the surface followed by a cleaning with fresh water to remove wax and dirt, changing rags frequently. Sand entire surface with [80, 100, 120, 80-120] Grit [Sand, Production] Paper; wipe clean. Apply two coats of antifouling paint.

NEW & BARE WOOD: Sand well with [80, 100, 120, 80-120] Grit [Sand, Production] Paper; wipe surface clean. Apply first coat of bottom paint reduced with [Interlux Special Thinner 216, Interlux Special Thinner, Special Thinner 216] (10% maximum) to penetrate the grain of wood. Fair seams with [Interlux Seam Compound 30, Seam Compound 30, SEAM COMPOUND 30]. Apply second coat of antifouling paint unreduced.

PREVIOUSLY PAINTED STEEL: Remove all loose paint, rust and surface contamination by sanding or using a wire brush; wipe surface clean. Touch up bare spots by roughening with 80 Grit Production Paper then spot priming with 3 coats of [INTERLUX Primocon, Primocon, InterProtect 2000E, InterProtect HS, InterProtect]; follow overcoat times between coats and prior to application of antifouling. Apply two coats of antifouling paint.

NEW STEEL: Sandblast to a near white finish; wipe surface clean. Immediately apply one thin coat of [InterProtect 2000E, InterProtect HS, InterProtect] thinned 15% with [Interlux 2333n, Interlux 2316n, Brushing Reducer 2333n, spray reducer 2316n]; Fill in all imperfections with Interlux [Watertite Epoxy Filler, Interfill Epoxy Filler]; sand filled areas smooth; wipe clean. Apply 3 coats of [INTERLUX Primocon, Primocon, InterProtect 2000E, InterProtect HS, InterProtect]. Apply two coats of antifouling paint.

Color difference may occur between actual paint and color swatch on front of can.

[Subset B – Alternate Directions for Use for Pleasure Craft]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: This product is a hard, high-strength antifouling designed for antifouling performance in moderate to high fouling conditions. This product has the added benefit of excellent color homogeneity and stability. The fast-dry formula of this product allows your boat to be painted and launched in the same day. This product is recommended for use on fiberglass, wood or properly primed steel and lead. Apply at least two full coats with brush, roller or spray. Do not apply when temperature is below 50°F (10°C).

COMPATIBILITY: This product is compatible with most other antifouling paints provided they are in sound condition and have been sanded. Soft antifouling paints and paints that are in poor condition will need to be removed or overcoated with Primocon® before applying this product.

V.O.C.: Less than 330 grams/liter 2.75 lbs./gallon yields	THEORETICAL COVERAGE: 506 sq. ft./ gallon (2 mils [Dry Film Thickness, DFT])
THINNER: SPECIAL THINNER 216 or Brush Ease 433	DRY TIMES: Touch dry - 1 hour 73°F (23°C) Dry to overcoat - 4 hours minimum Dry to launch - 8 hours
THINNING¹: Thin only when necessary. Do not exceed 10% maximum by volume	APPLICATION TEMPERATURES: 50°F (10°C) * and above (air and hull)
CLEAN-UP: SPECIAL THINNER 216 or Brush Ease 433	

ESTIMATED DRY TIMES:

Temperature °F (°C)	Touch Dry	Overcoating Time (Minimum)	Immersion Time (Minimum)
50°F (10°C)	3 Hours	6 Hours	12 Hours
59°F (15°C)	2 Hours	5 Hours	10 Hours
73°F (23°C)	1 Hour	4 Hours	8 Hours
95°F (35°C)	30 Minutes	2 Hours	6 Hours

*If the air temperature falls below 50°F (10°C) during the 12 hours dry time extend the dry times to 24 hours minimum.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED - GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit sandpaper; wipe surface clean with Special Thinner 216. Apply at least 2 coats of this product.

PREVIOUSLY PAINTED - POOR CONDITION: Completely remove all old antifouling paint. Sand and wipe clean with Interlux [Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Fiberglass Solvent Wash].

BARE FIBERGLASS (POLYESTER OR VINYLESTER) - SURFACE PREPARATION:

BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared in order to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following products; [Interlux Fiberglass Surface Prep YMA601V, Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Solvent Wash 202, Fiberglass Surface Prep] following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

BARE FIBERGLASS - NO SAND SYSTEM: Clean the surface following the preparation procedure described above. Apply one coat of [Interprotect® 2000E InterProtect HS, InterProtect] following the label instructions for applying the primer and overcoating with antifouling paint. Apply 2 coats of this product allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM: Clean the surface following the preparation procedure above. Sand the entire surface with [[80-120, 80, 100, 120] [grit, grade] sandpaper and wipe clean with [Interlux Fiberglass Surface Prep YMA601V, Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Solvent Wash 202, Fiberglass Surface Prep] to remove sanding residue. Repair any surface imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy filler]. Sand and wipe clean. Apply two coats of this product allowing for appropriate dry times.

BARE WOOD: Sand the entire surface with [80-120, 80, 100, 120] [grit, grade] sandpaper, wipe surface clean with [Interlux Special Thinner 216, Acetone, Fiberglass Solvent Wash 202]. Repair imperfections with [Watertite, Watertite epoxy filler, Interfill, Interfill Epoxy filler]. Sand and wipe clean. Apply the first coat of this product thinned 10% with [Special Thinner 216 or Brush-Ease 433,]. Fill seams with Seam Compound 30 (if necessary). Apply an additional coat of this product unthinned, allowing appropriate dry times.

UNDERWATER METALS: Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

MAINTENANCE

Antifouling are not effective under all conditions. Pollution, usage and natural occurrences can adversely affect an antifouling paint's performance. Therefore, we strongly suggest that the antifouling paints are checked regularly to make sure it is clean and that no growth is occurring. The less a boat is used, and the longer the idle-periods are, the higher the chance of fouling. Aggressive cleaning of antifouling paints, using tools such as scrubbing pads and brushes, will shorten the effective life of the paint, and should only be used if necessary.

***¹Thinning of this product may affect the V. O. C. compliance of this product.
Please consult your local government regulations for recommendations for volatile organic compound (VOC) limits.***