

Ultra-Kote 2669H Blue

EXCELLENT PROTECTION FOR SEVERE FOULING AREAS
FOR FIBERGLASS, WOOD OR STEEL BOATS

KEEP OUT OF REACH OF CHILDREN

WARNING



See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

EPA Registration No. 2693-143

EPA Establishment No. 2693-NJ1

Active Ingredient:		
Cuprous Oxide	=	72.25%
Inert Ingredients:	=	27.75%
		100.00%
Elemental Copper	=	64.10%

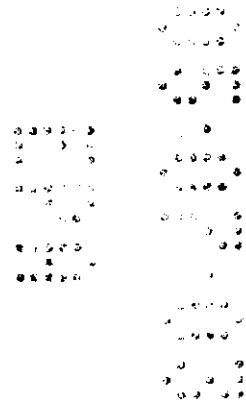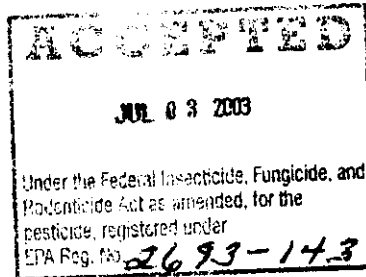

PRECAUTIONARY STATEMENTS

WARNING

HAZARD TO HUMANS AND DOMESTIC ANIMALS:

Causes eye irritation. Harmful if swallowed or absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if inhaled. Do not breathe the vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Call a poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

if on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

if inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

ENVIRONMENTAL HAZARD

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.


PHYSICAL OR CHEMICAL HAZARD

Flammable. Keep away from heat and open flame.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State, or local disposal authorities.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in an approved landfill, or by other approved state and local alternative procedures.

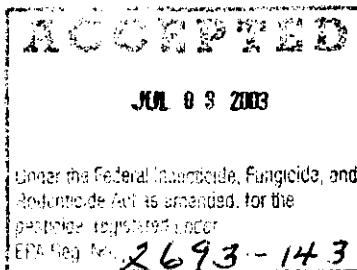

ULTRA-KOTE® 2669H BLUE ANTIFOULING BOTTOM PAINT

ACCEPTED 373
JUL 03 2003
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 2623-143

DIRECTIONS FOR USE:

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: ULTRA-KOTE® 2669H BLUE is a copper product for commercial and non-commercial use containing cuprous oxide. ULTRA-KOTE® also has excellent color stability. ULTRA-KOTE® can be applied to fiberglass, wood and properly prepared steel boat hulls. Use ULTRA-KOTE® where the fouling challenge is severe such as warm/tropical marine waters or in areas where runoff from the land causes higher algae and grass growth. ULTRA-KOTE® gives you protection no matter where you are.

GENERAL APPLICATION: ULTRA-KOTE® can be applied over most other antifouling paints, but it is important that these coatings be in excellent condition, well adhered to the hull and any loose or flaking paint has been removed. Soft antifouling paints should be removed. It is best to apply ULTRA-KOTE® between 50°F and 95° F.

MIXING AND THINNING: Shake or mix well. Stir continuously while using. For brush or roller use, thin if necessary with INTERLUX BRUSH-EASE 433. For use on bare wood, thin 15% with INTERLUX SPECIAL THINNER 216. For spray application, thin up to 10% with INTERLUX SPECIAL THINNER 216.

THEORETICAL COVERAGE: 450 square feet per gallon per coat.

CLEAN UP: INTERLUX SPECIAL THINNER 216 or INTERLUX BRUSH-EASE 433.

ESTIMATED DRY TIMES: ULTRA-KOTE® may be overcoated with itself after an overnight dry. Prior to launch, allow an overnight dry. Maximum time to launch is 60 days.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES: Sand the entire surface with 80 grit sandpaper. Wipe the surface with INTERLUX SPECIAL THINNER 216. Apply two coats of ULTRA-KOTE®.

BARE FIBERGLASS - NO SANDING METHOD: Wash entire surface with FIBERGLASS SOLVENT WASH 202 changing rags frequently. Repeat application to be sure all wax and mold release agents have been removed. Repair dents and scratches with EPOXY SURFACING & FAIRING COMPOUND 417A/418B; sand and clean repaired areas. Apply one thin coat of INTERLUX FIBERGLASS PRIMER AL200 with brush or roller. Do not spray, do not sand. Apply first coat of ULTRA-KOTE® after the FIBERGLASS PRIMER AL200 has dried for two hours but no more than three. Apply second coat of ULTRA-KOTE after an overnight dry.

BARE FIBERGLASS SANDING METHOD: Wash entire surface with FIBERGLASS SOLVENT WASH 202, changing rags frequently to be sure all contamination is removed. Repair scratches and dents with EPOXY SURFACING & FAIRING COMPOUND 417A/418B. Sand entire surface with 80 grit production sandpaper until a dull, matte appearance is obtained, wipe clean. Apply two coat of ULTRA-KOTE®.

BARE WOOD: Sand well with 80 grit production paper, wipe surface clean. Apply first coat of ULTRA-KOTE® after it has been thinned 15% with INTERLUX SPECIAL THINNER 216. Apply second coat after an overnight dry. (Do not thin second coat unless necessary).

UNDERWATER METALS: Please contact the INTERLUX Technical Sales Department for full details on how to apply to underwater metals. Do not use on aluminum.

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of Courtaulds Coatings Inc. including the surface preparation, proper application and the environmental conditions. Therefore, Courtaulds Coatings Inc. cannot guarantee the suitability of this product for your particular purpose or application. **IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED.** COURTAULDS COATINGS INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtaulds Coatings Inc.'s option.

International Paint Inc.
2270 Morris Ave., Union, NJ 07083