

PM 31

2693-144

10/2

ACCEPTED
JAN 24 1997
Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 2693-144



RECD EPA 7/P/DPDI

97



BEST AVAILABLE COPY

PRECAUTIONARY STATEMENTS
WARNING

**KEEP OUT OF REACH OF CHILDREN
HAZARD TO HUMANS AND DOMESTIC ANIMALS:**

Causes eye irritation. Harmful if swallowed or absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Promptly drink large quantities of water. Never give anything by mouth to an unconscious person. Avoid alcohol. Get medical attention.
IF IN EYES: Flush with plenty of water. Get medical attention if irritation persists.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.
IF INHALED: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARD


This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

Flammable. Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food, feed by storage or disposal. Open dumping is prohibited.
PESTICIDE DISPOSAL: Pesticide wastes are toxic. Paint that cannot be used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.
CONTAINER DISPOSAL: Triple rinse (or equivalent). Dispose of container by triple rinse and recycling or puncturing and disposing in a sanitary landfill or by other approved State and local procedures. If burned stay out of smoke.

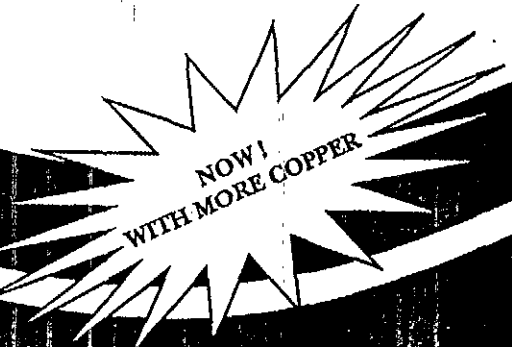

Ultra-Kote

24 LBS (11.3 KG) NET WT
FOR SEVERE BOILING AREAS
KEEP OUT OF REACH OF CHILDREN
WARNING

NET CONTENTS: ONE US GALLON (3.785 LITERS)

ACCEPTED
JAN 24 1997
 Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 2693-144

ULTRAKOTE® 2449H RED ANTIFOULING BOTTOM PAINT

DIRECTION FOR USE:
 It is a violation of federal law to use this product in a manner inconsistent with its labeling.
PRODUCT DESCRIPTION: ULTRAKOTE® 2449H RED has been developed to provide excellent single season antifouling protection from shell and weed growth. With 76% cuprous oxide, this epoxy ester formula is recommended for use wherever the fouling challenge is severe, such as tropical marine waters, warm bays or tidal waters, or in areas where nutrient runoff from the land results in high algae and grass growth. ULTRAKOTE® is formulated to offer the added benefits of excellent color stability and ease of mixing. ULTRAKOTE® is compatible with most other antifouling paints. It can be used below the waterline in fresh, salt or brackish water on fiberglass, wood and properly primed metal boat hull and parts. Do not use on aluminum. This product is suitable for commercial and non-commercial applications.
COMPATIBILITY: ULTRAKOTE® can be applied over most other antifouling paints, but it is important that these coatings be in excellent condition, well adhered to the hull and any loose or flaking paint has been removed. Soft antifouling paints should be removed. It is best to apply ULTRAKOTE® between 50°F and 95°F. Shake or mix well. Stir continuously while using.
V.O.C.: Less than 219 grams/liter (1.8 lbs./gallon) as supplied.
THINNER: Brushing - BRUSH-EASE 433
 Spraying - SPECIAL THINNER 216
THINNING: Thin only when necessary. Do not exceed 10% by volume (15% on bare wood).
CLEAN UP: INTERLUX SPECIAL THINNER 216 or INTERLUX BRUSH-EASE 433.
THEORETICAL COVERAGE: 450 square feet per gallon per coat.
DRYING TIMES: Touch dry - 2 hours
 Dry to overcoat - 16 hours minimum*
 Dry to launch - 16 hours minimum, 60 days maximum*
APPLICATION TEMPERATURE: 50°F (10°C) and above* (Air and Hull).
 *If either the air or hull temperature falls below 50°F (10°C) during the 16 hour dry time, extend the dry time and launch time to 36 hours minimum.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES: Sand the entire surface with 80 grit sandpaper. Wipe the surface with INTERLUX SPECIAL THINNER 216. Apply two coats of ULTRAKOTE®.
BARE FIBERGLASS - NO SAND METHOD: Wash entire surface with INTERLUX FIBERGLASS SOLVENT WASH 202 changing rags frequently. Repeat application to be sure all wax and mold release agents have been removed. Repair dents and scratches with INTERLUX EPOXY SURFACING & FAIRING COMPOUND 417A/418B; sand and clean repaired areas. Apply one thin coat of INTERLUX FIBERGLASS AL200 PRIMER with brush or roller. Do not spray, do not sand. Apply first coat of ULTRAKOTE® after an overnight dry.
BARE FIBERGLASS SANDING METHOD: Wash entire surface with INTERLUX FIBERGLASS SOLVENT WASH 202, changing rags frequently to be sure all contamination is removed. Repair scratches and dents with INTERLUX EPOXY SURFACING & FAIRING COMPOUND 417A/418B. Sand entire surface with 80 grit production sandpaper until a dull, matte appearance is obtained, wipe clean with INTERLUX FIBERGLASS SOLVENT WASH 202. Apply two coats of ULTRAKOTE®, allowing an overnight dry between coats.
BARE WOOD: Sand well with 80 grit production sandpaper; wipe surface clean with INTERLUX SPECIAL THINNER 216. Fill minor voids and imperfections with INTERLUX EPOXY SURFACING & FAIRING COMPOUND 417A/418B. Apply first coat of ULTRAKOTE® after it has been thinned 15% with INTERLUX SPECIAL THINNER 216. Fill seams, if necessary, with INTERLUX SEAM COMPOUND 30. Allow INTERLUX SEAM COMPOUND 30 to skin over for 24-48 hours before applying the second coat of ULTRAKOTE®. Do not thin second coat of ULTRAKOTE®.
UNDERWATER METALS: Please contact the INTERLUX Technical Sales Department 1-800-468-7589 for full details on how to apply to underwater metals. Do not use on aluminum.
DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Courtauld's Coatings Inc. including surface preparation, proper application, and environmental conditions. Therefore, Courtauld's Coatings Inc. cannot guarantee this product's suitability for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY ARE EXCLUDED. COURTAULD'S COATINGS INC. SHALL NOT, UNDER ANY CIRCUMSTANCES, BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtauld's Coatings Inc.'s option.

Rev. 03/95

Interlux For information call 908-686-1300
 Or write: Interlux, 2270 Morris Ave., Union, NJ 07088

Interlux
 76% Cuprous Oxide
 2/1000
 100/100
 67/100



400 S. 13th Street, Louisville, KY 40203
 Union, NJ • Louisville, KY • Montreal, Quebec • Houston, TX