

2693-144 6/23/2003



ACCEPTED

JUN 23 2003

Under the Federal Insecticide, Fungicide, and Herbicide Act as amended, for the pesticide, registered under EPA Reg. No. 2693-144

Interlux®

Ultra-Kote®

**Excellent Protection for Severe Fouling Areas
For Fiberglass, Wood or Steel Boats**

**KEEP OUT OF REACH OF CHILDREN
WARNING**

See Side Panel for Additional Precautionary Statements

**2449H
RED**

**ONE U.S. GALLON
(3.785 L)**

PERCENT
ACTIVE INGREDIENT 76.00%
CUPROUS OXIDE 24.00%
INERT INGREDIENTS 100.00%

ELEMENTAL COPPER 67.40%

EPA EST 2693-NJ-1
EPA REG NO. 2693-144

1/3

PRECAUTIONARY STATEMENTS WARNING KEEP OUT OF REACH OF CHILDREN

HAZARD TO HUMANS AND DOMESTIC ANIMALS:

Causes eye irritation. Harmful if swallowed or absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Call a poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

ENVIRONMENTAL HAZARD

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD


Flammable. Keep away from heat and open flame

STORAGE AND DISPOSAL

Do not contaminate water, food, feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Paint that cannot be used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Dispose of container by triple rinse and recycling or puncturing and disposing in a sanitary landfill or by other approved State and local procedures. If burned stay out of smoke.

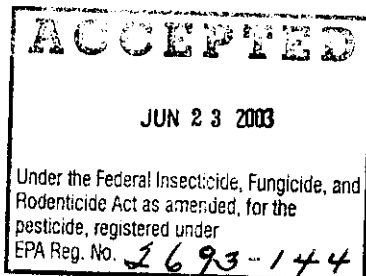

PERFORMANCE: The performance of any marine paint or coating depends on many factors outside the control of Carbotech Coatings Inc. including surface preparation, proper application, and environmental conditions. Therefore, Carbotech Coatings Inc. cannot guarantee the product's suitability for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY ARE EXCLUDED. CARBOTECH COATINGS INC. SHALL NOT, UNDER ANY CIRCUMSTANCES, BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of this product, buyer agrees that the sale and exclusive remedy, if any, is limited to the return of the product or replacement of the product at Carbotech Coatings Inc.'s option.

Interlux

For information call 908-686-1300
Or write: Interlux, 2270 Morris Ave., Union, NJ 07083

International Paint Inc.
2270 Morris Ave.
Union, NJ 07083

ULTRA-KOTE® 2449H RED ANTIFOULING BOTTOM PAINT

DIRECTION FOR USE:

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: ULTRA-KOTE® 2449H RED has been developed to provide excellent single season antifouling protection from shell and weed growth. With 76% cuprous oxide, this epoxy ester formula is recommended for use wherever the fouling challenge is severe, such as tropical marine waters, warm bays or tidal waters, or in areas where nutrient runoff from the land results in high algae and grass growth. ULTRA-KOTE® is formulated to offer the added benefits of excellent color stability and ease of mixing. ULTRA-KOTE® is compatible with most other antifouling paints. It can be used below the waterline in fresh, salt or brackish water on fiberglass, wood and properly primed metal boat hull and parts. Do not use on aluminum. This product is suitable for commercial and non-commercial applications.

COMPATIBILITY: ULTRA-KOTE® can be applied over most other antifouling paints, but it is important that these coatings be in excellent condition, well adhered to the hull and any loose or flaking paint has been removed. Soft antifouling paints should be removed. It is best to apply ULTRA-KOTE® between 50°F and 95°F. Shake or mix well. Stir continuously while using.

V.O.C.: Less than 219 grams/liter (1.8 lbs./gallon) as supplied.

THINNER: Brushing - BRUSH-EASE 433
Spraying - SPECIAL THINNER 216

THINNING: Thin only when necessary. Do not exceed 10% by volume (15% on bare wood).

CLEAN UP: INTERLUX SPECIAL THINNER 216 or INTERLUX BRUSH-EASE 433.

THEORETICAL COVERAGE: 450 square feet per gallon per coat.

DRYING TIMES: Touch dry - 2 hours
Dry to overcoat - 16 hours minimum*
Dry to launch - 16 hours minimum, 60 days maximum*

APPLICATION TEMPERATURE: 50°F (10°C) and above* (Air and Hull).
*If either the air or hull temperature falls below 50°F (10°C) during the 16 hour dry time, extend the dry time and launch time to 36 hours minimum.

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES: Sand the entire surface with 80 grit sandpaper. Wipe the surface with INTERLUX SPECIAL THINNER 216. Apply two coats of ULTRA-KOTE®.

BARE FIBERGLASS - NO SAND METHOD: Wash entire surface with INTERLUX FIBERGLASS SOLVENT WASH 202 changing rags frequently. Repeat application to be sure all wax and mold release agents have been removed. Repair dents and scratches with INTERLUX EPOXY SURFACING & FAIRING COMPOUND 417A/418B; sand and clean repaired areas. Apply one thin coat of INTERLUX FIBERGLASS AL200 PRIMER with brush or roller. Do not spray, do not sand. Apply first coat of ULTRA-KOTE® after the Fiberglass Primer AL200 has dried between 2-3 hours. NO MORE-NO-LESS! Apply second coat of ULTRA-KOTE after an overnight dry.

BARE FIBERGLASS SANDING METHOD: Wash entire surface with INTERLUX FIBERGLASS SOLVENT WASH 202, changing rags frequently to be sure all contamination is removed. Repair scratches and dents with INTERLUX EPOXY SURFACING & FAIRING COMPOUND 417A/418B. Sand entire surface with 80 grit production sandpaper until a dull, matte appearance is obtained, wipe clean with INTERLUX FIBERGLASS SOLVENT WASH 202. Apply two coats of ULTRA-KOTE®, allowing an overnight dry between coats.

BARE WOOD: Sand well with 80 grit production sandpaper; wipe surface clean with INTERLUX SPECIAL THINNER 216. Fill minor voids and imperfections with INTERLUX EPOXY SURFACING & FAIRING COMPOUND 417A/418B. Apply first coat of ULTRA-KOTE® after it has been thinned 15% with INTERLUX SPECIAL THINNER 216. Fill seams, if necessary, with INTERLUX SEAM COMPOUND 30. Allow INTERLUX SEAM COMPOUND 30 to skin over for 24-48 hours before applying the second coat of ULTRA-KOTE®. Do not thin second coat of ULTRA-KOTE®.

UNDERWATER METALS: Please contact the INTERLUX Technical Sales Department 1-800-468-7589 for full details on how to apply to underwater metals. Do not use on aluminum.

Color difference may occur between actual paint and color swatch on front of can.

