

2693-148

02-04-2010

1/15



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

WASHINGTON, D.C. 20460

OFFICE OF  
PREVENTION, PESTICIDES  
AND TOXIC SUBSTANCES

Mr. John Pazdera  
Pesticide Registration Manager for,  
International Paint LLC  
2270 Morris Ave.  
Union, New Jersey 07083

FEB - 4 2010

Subject: Regatta Baltoplate Racing Finish 3950 Gray Metallic  
EPA Registration Number 2693-148  
Your Amendment Dated November 10<sup>th</sup>, 2009  
EPA Received Date November 12<sup>th</sup>, 2009

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, FIFRA, as amended, to revise the Storage and Disposal section as per PR Notice 2007-4 and "Directions for Use" section, is acceptable.

A copy of the stamped labeling is enclosed.

If you have questions concerning this letter, please contact Karen M. Leavy at (703)-308-6237.

Sincerely,

*Dennis H Edwards* for

Marshall Swindell  
Product Manager 33  
Regulatory Management Branch I  
Antimicrobials Division(7510P)

Please read instructions on reverse before completing form.

Form Approved, UMB No. 2070-0060



United States  
Environmental Protection Agency  
Washington, DC 20460

Registration  
 Amendment  
 Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 2693-148	2. EPA Product Manager M. Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Regatta Baltoplate Racing Finish 3950 Gray Metallic	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) International Paint LLC 2270 Morris Ave. Union NJ 07083 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: <input checked="" type="checkbox"/> EPA Reg. No. _____ Product Name _____	

Section - II

<input checked="" type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

Label amendment: Update language to meet current standards; revise Alternate Directions for Use - "Subset A".

Minor amendment per PR Notice 98-10 - No registration fee required.

Section - III

1. Material This Product Will Be Packaged In:						2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	If "Yes" Unit Packaging wgt. No. per container		If "Yes" Package wgt. No. per container		<input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____
* Certification must be submitted							
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product			
6. Manner in Which Label is Affixed to Product			<input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled		<input type="checkbox"/> Other _____		

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)			
Name John P. Pazdera	Title Pesticide Regis. Manager	Telephone No. (Include Area Code) 908-964-2288	
<b>Certification</b> I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.			6. Date Application Received (Stamped) 
2. Signature <i>John P. Pazdera</i>	3. Title Pesticide Registration Manager		
4. Typed Name John P. Pazdera	5. Date Nov 10, 2009		



**AkzoNobel**

Tomorrow's Answers Today

Mr. Marshall Swindell  
Product Manager (33)  
Regulatory Management Branch I  
Antimicrobial Division (7504P)  
U.S. EPA  
Room S-4900, One Potomac Yard  
2777 South Crystal Drive  
Arlington, VA 22202-4501

Via Federal Express

November 10, 2009

Re: Regatta Baltoplate Racing Finish 3950 Gray Metallic  
EPA Reg. No. 2693-148  
Label Amendment

Dear Mr. Swindell:

The enclosed label amendment pertains to our product Regatta Baltoplate Racing Finish 3950 Gray Metallic, EPA Reg. No. 2693-148. Specifically, we wish to make the following changes:


- Revise the Storage and Disposal section in accord with PR Notice 2007-4.
- Revise the Directions for Use "Subset A".

No other changes are being made. For reference, a copy of the EPA-stamped label dated 7/3/03 is also enclosed.

As this is a minor amendment as described in PR Notice 98-10, no registration service fee is required.

Enclosed, therefore, please find:


- EPA Form 8570-1
- Five (5) copies of revised labeling
- Copy of EPA-stamped label dated 7/3/03



Mr. Marshall Swindell  
November 9, 2009  
Page 2

Please do not hesitate to contact me at 908-964-2288 if there are any questions concerning this submission.


Very truly yours,

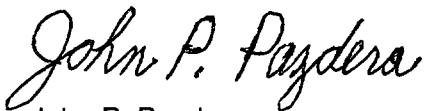

John P. Pazdera  
Pesticide Registration Manager

JPP/cd

Enclosures

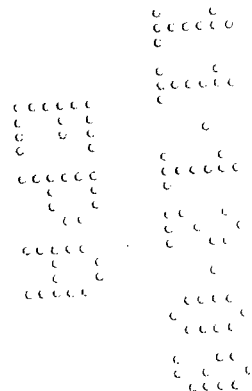

# REGATTA

## BALTOPLATE RACING FINISH

### ANTIFOULING BOTTOM PAINT FOR THE SERIOUS RACER

#### 3950 Gray Metallic

[For Professional Boat Paint Applicators]

- Hard Bottom Paint for All Waters
- Dependable Season Long Protection
- Overcoats Existing Antifouling Paint
- Super Value Bottom Paint

	%
ACTIVE INGREDIENT:	
Cuprous Oxide	= 41.15
INERT INGREDIENTS:	= 58.85
TOTAL	= 100.00
Elemental Copper	= 37.25

**Contains Petroleum Distillates**

EPA Registration No. 2693-148 EPA Establishment No. 2693-NJ-1

KEEP OUT OF REACH OF CHILDREN


### WARNING

See side panel for additional precautionary statements.

**Net Contents: ONE U.S. GALLON (3.785 LITERS)**

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of Courtaulds Coatings Inc. including the surface preparation, proper application and the environmental conditions. Therefore, Courtaulds Coatings Inc. cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. COURTAULDS COATINGS INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtaulds Coating Inc.'s option.

**Manufactured for Regatta Yacht Paint Inc.**  
 International Paint LLC  
 2270 Morris Ave.  
 Union, NJ 07083

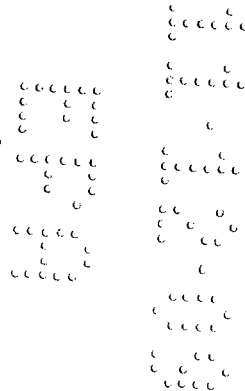

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Safety & Health Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

**FIRST AID**

**If Swallowed:**

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

**If on skin or clothing:**

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

**If inhaled:**

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

**If in eyes:**

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

**Other:** Have the product container or label with you when calling a poison control center or doctor or going for treatment.


**Note to Physician:** Contains petroleum distillate – vomiting may cause aspiration pneumonia.

**ENVIRONMENTAL HAZARD**

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARD**

Flammable. Keep away from heat and open flame.

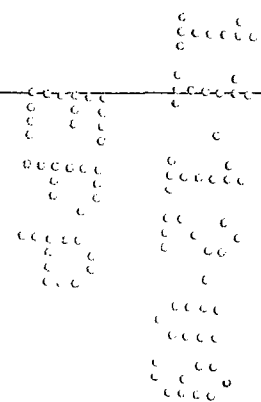

## STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

---

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT:  
CALL TOLL FREE – CHEMTREC 1-800-424-9300 (DAY OR NIGHT)  
MEDICAL ADVISORY:  
CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813

## [Directions for Use – Subset A]

### Baltoplate Racing Finish Antifouling Bottom Paint for the Serious Racer

**PRODUCT DESCRIPTION:** This product is a specialized antifouling paint for the serious racer. It combines the fouling resistance of an antifouling finish with the smoothness and lubricity of a superior racing bottom finish in one coating. This product is unlike any bottom paint you have ever used. It dries to a dull finish. Sand, polish and watch an amazing change take place. What was a dull finish is now a gleaming metallic finish. This product is recommended for use in all waters.

**DIRECTIONS FOR USE:** It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**COMPATIBILITY:** This product should not be applied over ANY bottom paints other than vinyl paints containing Cuprous Oxide. This product can be applied by brush, roller or spray.

<b>V.O.C.:</b> Less than 515 grams/liter. Less than 4.28 lbs. /gal.	<b>THEORETICAL COVERAGE:</b> 305 sq. ft./gal. Yields 2 mils dry film thickness.
<b>THINNER:</b> Interlux Viny-Lux Solvent 355	<b>THINNING:</b> Thin only when necessary. Do not to exceed 10% maximum.
<b>CLEAN UP:</b> Interlux Special Thinner 216 or Interlux Viny-Lux Solvent 355	<b>APPLICATION TEMPERATURE:</b> 50°F (10°C)* and above (air and hull).

#### ESTIMATED DRY TIMES:

Temperature °F (°C)	Touch Dry	Overcoating Time		Immersion Time	
		Minimum	Maximum	Minimum	Maximum
50°F (10°C)	3 Hours	12 Hours	16 Hours	16 Hours	60 Days
73°F (24°C)	2 Hour	6 Hours	12 Hours	12 Hours	60 Days
95°F (35°C)	1 Hour	4 Hours	8 Hours	8 Hours	60 Days

\*If the air temperature falls below 50°F (10°C) during the 12 hour dry time, extend the dry time and launch time to 24 hours.

#### PREPARATION

##### PREVIOUSLY PAINTED SURFACES

Remove previous coating unless it can be determined it is a vinyl based paint containing Cuprous Oxide. Scrape and sand with 80-grit sandpaper any old vinyl coatings which are not adhering to the surface. Wipe the sanding residue off the surface with Special Thinner 216. Remove antifouling paint in poor condition with Interstrip Semi-Paste 299E. Apply three coats of this product according to the Dry Time Schedules above.



**BARE FIBERGLASS:**

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Remove mold release wax using one of the following Interlux products. Fiberglass Surface Prep YMA601 or Fiberglass Solvent Wash 202 following the product label instructions. Fill any surface imperfections with Interlux Watertite YAV135 following the label instructions. After the surface has been properly cleaned, proceed with one of the application systems below.

**APPLICATION SYSTEMS****BARE FIBERGLASS:**

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Fiberglass Solvent Wash 202. Sand and wipe clean. Apply three coats of this product following for appropriate dry times.

**BARE FIBERGLASS - BLISTER PREVENTION SYSTEM:**

For the prevention of blisters, apply InterProtect® 2000E. Apply enough InterProtect 2000E to reach a 10 mil dry film thickness plus 1 additional coat. Allow to dry for 24 hours and sand with 80 grit sandpaper prior to applying this product. For full details, contact the Interlux Technical Service Department at 1-800-468-7589 or visit [yachtpaint.com](http://yachtpaint.com) for complete details.

**BARE WOOD:**

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Special Thinner 216. Apply the first coat of this product thinned 10% with Viny-Lux Solvent 355. Apply two more coats of this product unthinned, allowing for the appropriate dry times.

**POLISHING:** After the final coat of this product has cured wet sand with 400 grit sandpaper removing any imperfections in the coat. Polish with fine bronze wool until a shiny, super smooth finish is obtained.

**UNDERWATER METALS:**

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

**COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN. THIS PRODUCT IS A BRICK RED COLOR WHEN APPLIED. IT WILL TURN GRAY METALLIC AFTER WET SANDING.**

**BALTOPLATE RACING FINISH  
ANTIFOULING BOTTOM PAINT FOR THE SERIOUS RACER**

**DIRECTIONS FOR USE**

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

**GENERAL DESCRIPTION:**

This product is an antifouling protective coating resistant to algae, barnacles and other marine fouling.

This product has been developed with increased antifouling performance for both fresh and salt water. This product combines superior antifouling performance with a supersmooth low friction surface for the performance conscious boater. The friction reducing property of this product is enhanced by its fluorocarbon base (of which Teflon is a well-known trademark). When polished, this product yields a very hard finish for maximum durability and reduced friction for increased performance.

**SURFACE PREPARATION**

1. New or unpainted fiberglass - Wash surface with V170 VC-GENERAL THINNER changing rags frequently to remove all mold release wax. Sand surface to a dull finish with 80 grit production paper. Wipe surface clean with V170 VC-GENERAL THINNER and apply the first coat of this product. Allow a minimum of 6 hours before second coat is applied.
2. Previously coated vinyl surface - This product may be applied over vinyl based antifouling provided the old surface is in good condition. Sand vinyl antifouling fair with 80 grit production paper. Wash the surface with V170 VC-GENERAL THINNER and apply first coat of This product. Allow minimum of 6 hours before second coat.
3. Previously coated surface - Remove all previous coats unless they are vinyl based per above. Scrape and sand all coatings from surface. Clean surface with V170 VC-GENERAL THINNER and apply first coat of this product. Allow minimum of 6 hours before second coat.
4. New or cleaned wood - Sand with 80 grit production paper. Wipe surface clean with V170 VC-GENERAL THINNER. Apply first coat this product, thinned 15% with V171 VC-VINYL THINNER. Allow minimum 6 hours between coats. Apply two full unthinned coats of this product.
5. Steel, iron and lead must be primed to avoid contact with copper bottom paints. (Not for Aluminum) Grind or sand blast alloy to bright metal, clean thoroughly with V170 VC-GENERAL THINNER and overcoat within one hour with the first coat of V125 VC-TAR. Apply 3-5 additional coats taking care to follow the label directions as to overcoating time. Apply this product within 12-36 hours of the last coat of V125 VC-TAR.

**MIXING:**

Mix well, thin up to 10% with V171 VC-VINYL THINNER for spraying. Thin only as required for brushing or rolling. Do not exceed 10% by volume (other than wood). Stir repeatedly.

**POLISHING:**

After the final coat of this product has dried, wet sand with 400 grit to remove any imperfections in the film. Polish with fine bronze wool to a super smooth finish.

**CAUTION:**

Do not use on aluminum boats, outdrives or parts without proper barrier coats. This product cannot be applied over any previous antifouling paint unless it is vinyl based.

**Application Information**

**Technical Facts:** Based on air temperature of 70° at application.

**Drying Time Between Coats:** Min. = 10 hours  
Max. = None

**Drying Time To Launch:** Min. - Overnight; Max. - 30 days.

**Coverage:** 305 square feet per gallon.

**Thinner:** V171 VC-VINYL THINNER

**Application Tools:** Brush, roller, spray. (For best performance finish spray apply only).

**Number Of Coats:** Two are recommended.

**FOR INFORMATION CALL 1-908-686-1300 OR WRITE TO:  
2270 MORRIS AVENUE, UNION, NJ 07083**

**BALTOPLATE RACING FINISH  
ANTIFOULING BOTTOM PAINT FOR THE SERIOUS RACER**

**DIRECTIONS FOR USE**

This product is a hard modified epoxy antifouling paint developed to provide effective season long antifouling protection and ease of application. This product is recommended for use on the underwater areas of fiberglass, wood and properly primed metal (except aluminum) boat hulls. This product can be used in fresh, salt and brackish waters.

**COMPATIBILITY:** This product can be applied over most other antifouling paints provided they are adhering well to the surface and the surface has been cleaned and sanded.

**COVERAGE:** 400 sq. ft. per gallon.

**GENERAL SURFACE PREPARATION:** The surface must be clean and dry. Wash gelcoat finishes with fiberglass wax remover to remove mold release wax and other contaminants. Change rags frequently and always adhere to cleaning instructions on the label. Fill gouges and dents with epoxy putty. Sand smooth with 80-120 grit sandpaper.

**GENERAL APPLICATION PROCEDURES:** This product can be applied over fiberglass or wood by brush, roller, or spray. Performance of the paint will relate directly to the care in surface preparation, application technique and the number of coats applied. Apply at least two coats. Observe the dry time schedules provided below.

**MIXING INSTRUCTIONS:** Mix until all solids are dispersed. Thin only as required with solvent when brushing or rolling. Stir repeatedly during application to prevent solids from resettling.

**DRY TIMES:** (At 77°F) Between coats - 10 hours.

**LAUNCH TIMES:** Minimum 10 hours  
Maximum 60 days

**SPECIFIC APPLICATION PROCEDURES**

**PREVIOUSLY COATED SURFACES**

**GOOD CONDITION:** Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit wet or dry sandpaper; wipe surface clean with paint thinner. Apply at least 2 coats of this product.

**POOR CONDITION:** Completely remove all old antifouling paint. Proceed with application system for bare work as described below.

**BARE SURFACES**

**FIBERGLASS, SANDLESS SYSTEM:** Wash the entire surface with fiberglass wax remover to remove all mold release wax and other contaminants. Change rags frequently and always adhere to cleaning instructions on the label. Apply one thin coat of non-sanding primer by roller or brush, following label instructions. Apply two coats of this product. Allow a minimum of 10 hours of drying time between coats.

**MANUAL SANDING SYSTEM:** Wash the entire surface with fiberglass wax remover to remove all mold release wax and other contaminants. Change rags frequently and always adhere to cleaning instructions on the label. Sand to a dull finish with 80-120 grit sandpaper. Wipe the surface clean and apply the first coat of **this product**. Apply at least two coats, allowing a minimum of 10 hours of drying time between coats.

**BARE WOOD:** Sand with 80-120 grit sandpaper. Wipe the surface clean. Apply the first coat of **this product** thinned approximately 15% with paint thinner. Allow 8-10 hours of drying time. Caulk seams if necessary with Seam Compound. Apply the second and third coats unthinned. Allow a minimum of 10 hours of drying time between additional coats.

**BARE METAL (EXCEPT ALUMINUM):** Apply a good anti-corrosive primer or anti-corrosive epoxy following manufacturers recommendations. Apply two coats of **this product**, (three coats on shafts and props) allowing 10 hours between coats. Do not use on Aluminum.

**FOR INFORMATION CALL 1-908-686-1300 OR WRITE TO:  
2270 MORRIS AVENUE, UNION, NJ 07083**

BALTOPLATE RACING FINISH  
ANTIFOULING BOTTOM PAINT FOR THE SERIOUS RACER

**DIRECTIONS FOR USE**

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

**DIRECTIONS FOR USE CONT'D**

**PRODUCT DESCRIPTION:** This product is a hard modified-epoxy antifouling paint developed to provide effective season long protection and ease of application. This product is recommended for use on the underwater areas of fiberglass, wood and properly primed metal (except aluminum) boat hulls. This product can be used in fresh, salt and brackish waters.

**COMPATIBILITY:** This product can be applied over most other antifouling paints provided they are adhering well to the surface and the surface has been cleaned and sanded. This product can be applied by brush, roller or spray.

**V.O.C.:** Less than 408 grams/liter (3.34 lbs./gallon).

**THINNER:** SPECIAL THINNER 216 or BRUSH-EASE 433.

**THINNING:** Thin only when necessary. Do not exceed 10% maximum.

**CLEAN-UP:** SPECIAL THINNER 216 or BRUSH-EASE 433.

**THEORETICAL COVERAGE:** 400 square feet/gallon yields 2 mils dry film thickness.

**DRY TIMES:** Touch dry - 2 hours.  
77°F (25°C) Dry to overcoat - 10 hours minimum  
Dry to launch - 10 hours minimum  
60 days maximum

**APPLICATION TEMPERATURE:** 50°F (10° C)\* and above (air and hull).

\* If the air temperature falls below 50° F (10° C) during the 10 hour dry time, extend the dry times to 36 hours minimum.

**APPLICATION SYSTEMS**

**PREVIOUSLY PAINTED - GOOD CONDITION:** Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit sandpaper, wipe surface clean with SPECIAL THINNER 216. Apply at least two coats of this product.

**PREVIOUSLY PAINTED - POOR CONDITION:** Completely remove all old antifouling paint, using FIBERGLASS PINTOFF 299 for fiberglass, PINTOFF 199 for wood, and by sandblasting to near white metal for steel. Follow application system for bare work below.

**BARE FIBERGLASS (POLYESTER OR VINYLESTER)**

**SURFACE PREPARATION:** It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with soap and water using a stiff brush, or **INTERLUX ABRASIVE CLEANER YMA600**. Flush well with water. Wipe a small area with a clean cloth that has been wetted with **INTERLUX FIBERGLASS SOLVENT WASH 202**. While the surface is still wet remove with a clean dry cloth. Repeat this process until the entire surface has been cleaned. To be certain that all the contamination has been removed, run water over the surface. If the water beads up or separates, wipe again with **FIBERGLASS SOLVENT WASH 202**. When the water sheets off, all contamination has been removed. Sanding does not remove contamination. After the surface has been properly cleaned, proceed with the application system below.

**BARE FIBERGLASS - NO SAND SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using **INTERLUX EPOXY SURFACING AND FAIRING COMPOUND 417A/418B**. Sand and wipe clean. Apply one thin, continuous coat of **INTERLUX AL200 FIBERGLASS PRIMER** by brush or roller. DO NOT SPRAY: DO NOT SAND. Allow to cure a minimum of 2 hours but no more than 3 hours, and apply the first coat of **this product**. Apply a second coat allowing for the appropriate dry times.

**BARE FIBERGLASS - SANDING SYSTEM:** Clean the surface following the preparation procedure above. Sand the entire surface with 80 grit sandpaper and wipe clean with **FIBERGLASS SOLVENT WASH 202** to remove sanding residue. Repair any surface imperfections using **INTERLUX EPOXY SURFACING AND FAIRING COMPOUND 417A/418B**. Sand and wipe clean. Apply two coats of **this product** allowing for appropriate dry times.

**BARE WOOD:** Sand the entire surface with 80 grit sandpaper, wipe surface clean with **INTERLUX SPECIAL THINNER 216**. Repair imperfections with **INTERLUX EPOXY SURFACING AND FAIRING COMPOUND 417A/418B**. Sand and wipe clean. Apply the first coat of **PROLUX 240** thinned 10% with **SPECIAL THINNER 216** or **BRUSH-EASE 433**. Fill seams with **INTERLUX SEAM COMPOUND 30** (if necessary). Apply two more coats of **this product** unthinned, allowing the appropriate dry times.

**UNDERWATER METALS:** Contact the Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. **DO NOT USE ON ALUMINUM.**

**FOR INFORMATION CALL 1-908-686-1300 OR WRITE TO:  
2270 MORRIS AVENUE, UNION, NJ 07083**