


FRONT PANEL

INTERLUX

**AQUARIUS ANTIFOULING BOTTOM PAINT
568 NAVY BLUE**

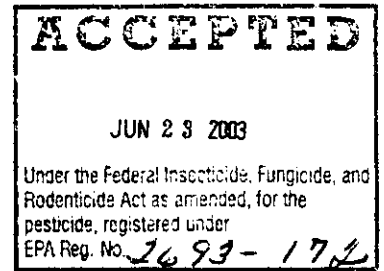

- Hard Scrubbable Finish
- Low V.O.C., Low Odor
- Easy Clean-Up with Water

Active Ingredient:

Cuprous Oxide = 46.45%

EPA Registration No. 2693-172

Inert Ingredients: = 53.55%

100.00%

EPA Establishment No. 2693-NJ-1

Elemental copper 37.9%

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

NET CONTENTS ONE U.S. GALLON (3.785 Liters)

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of International Paint Inc. including the surface preparation, proper application and environmental conditions. Therefore, International Paint Inc. cannot guarantee the suitability of this product for your particular purpose or application. **IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.** By purchase or use of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at International Paint Inc.'s option.

International Paint Inc.
2270 Morris Avenue
Union, NJ 07083

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMAN AND DOMESTIC ANIMALS
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. While spraying and/or sanding boat surface, wear a face mask and respirator jointly approved by the Mining Enforcement and Safety Administration and by the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID**If Swallowed:**

- Call a poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.


If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

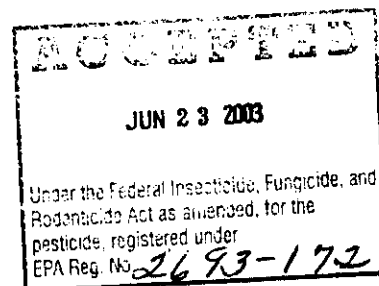**ENVIRONMENTAL HAZARDS**

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water board or Regional Office of the EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

Pesticide Disposal: Pesticide wastes are toxic. Open dumping is prohibited. Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

Container Disposal: Triple rinse (or equivalent) and dispose of in an approved landfill. Consult Federal, State, or local disposal authorities for approved alternative procedure.

RIGHT PANEL

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: AQUARIUS provides a hard, scrubbable finish that will give premium protection from algae, slime, barnacles, zebra mussels and other forms of fouling. AQUARIUS is perfect for use on either cruising or performance boats, and for those who want a little extra speed, the surface can be wet-sanded to provide a smooth racing finish with less drag. AQUARIUS is also low in Volatile Organic Content (V.O.C.) which limits solvent emission into our atmosphere, with the added benefit of easy clean-up with soap and water. AQUARIUS is for use below the waterline in fresh, salt and brackish waters on fiberglass, wood, and properly primed metal boat hulls and parts. Do not use on aluminum.

COMPATIBILITY: AQUARIUS can be applied over most antifouling paints as long as the old coating is tightly adhered and is in sound condition. When applying over conventional antifouling paints, thoroughly sand with 80 grit wet-or-dry sandpaper. If applying over self-polishing type copolymer antifouling, heavy sanding is required. Soft rosin based coatings should be removed prior to application of AQUARIUS.

V.O.C.: Less than 150 grams/liter

COATS REQUIRED: 2 coats.
3 coats on bare wood

THINNER: INTERLUX® Conditioner 6516

DRY TIMES: Touch dry - 2 hours
77°F (25°C) To Recoat - 6 hours
To Launch - Minimum 36 hours
from last coat
Maximum - 60 days

THINNING: Thin only if necessary
Do not exceed 10% by volume.


CLEAN UP: Soap and water. Be sure to observe proper disposal procedures for all antifouling paints.

THEORETICAL COVERAGE: 400 sq. ft./gal/coat.

APPLICATION TEMPERATURE: 50°F (10°C) and above.

* If either hull or air temperature falls below 50°F (10°C) during the 16 hour dry time extend the dry time to a minimum of 48 hours.

Do not apply if the air feels damp or it is raining. If it rains immediately after application allow to dry for a minimum of 24 hours (48 hours @ <50°F(10°C)) after it has stopped raining, prior to launch or overcoat.

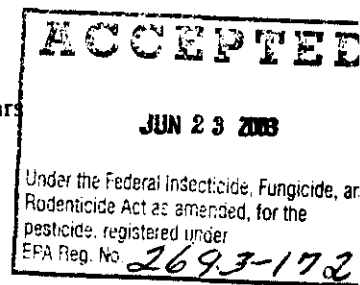

APPLICATION SYSTEMS

Stir thoroughly (do not shake) Apply at least two full coats (three on bare wood) of AQUARIUS by synthetic brush or 3/8" nap roller. Do not apply thin coats. If during application, the brush or roller drags, thin with INTERLUX® CONDITIONER 6516 to improve handling. During the drying and curing process there may appear to be color changes resulting in an uneven appearance. This discoloration will disappear as the finish dries to a deep uniform color.

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe surface clean with tap water. Apply at least two coats of **AQUARIUS**, allowing proper dry times. See compatibility section for additional information.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION: Completely remove all old antifouling paint with **INTERLUX® FIBERGLASS PINTOFF® 299** for fiberglass and epoxy surfaces, **INTERLUX® PINTOFF® 199** for wood and by sandblasting underwater metals to near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS - SURFACE PREPARATION: (POLYESTER and VINYLESTER) Wash entire surface thoroughly with **INTERLUX® FIBERGLASS SOLVENT WASH 202™** changing rags frequently. Before liquid dries, wipe with a clean dry cloth. Be sure all wax and other contamination is removed, failure to properly clean the surface will result in paint delamination. Sand any imperfections and repair with **INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B**; sand and wipe clean. Sanding does not remove contamination.

NO SAND SYSTEM: Prepare surface as described above - Apply one thin continuous coat of **INTERLUX® AL 200 FIBERGLASS PRIMER®** with brush or roller. Follow label directions for overcoating. Apply at least two coats of **AQUARIUS** allowing a minimum of 6 hours between coats.

BARE FIBERGLASS - SANDING SYSTEM: Prepare surface as described above - Sand entire surface well with 80 grit sandpaper until a flat, matte finish is obtained; wipe off sanding residue with **INTERLUX® FIBERGLASS SOLVENT WASH 202™**. Apply two coats of **AQUARIUS** allowing a minimum of 6 hours between coats.

BARE WOOD: Remove any surface contamination by wiping with **INTERLUX® SPECIAL THINNER 216**. Sand entire surface with 80 grit sandpaper. wipe off sanding residue with **INTERLUX® SPECIAL THINNER 216**. Repair any imperfections with **INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B**; sand and wipe clean. Apply first coat of **AQUARIUS** reduced with **INTERLUX CONDITIONER 6516** (10% maximum). Apply two additional coats unreduced. Allow a minimum of 6 hours between coats. Fill seams (if necessary) with **INTERLUX® SEAM COMPOUND 30** between first and second coats of antifouling paint.

UNDERWATER METALS: Contact the **INTERLUX®** Technical Service Department at 1-800-468-7589 for full details on how to properly prime underwater metals. Do not use on aluminum.

NOTE: Keep from freezing.

INTERLUX® For more information call 908-686-1300
or write: Interlux, 2270 Morris Avenue, Union, N.J. 07083

