

5/6/96

PM 31

2693-174

PS 126



United States Environmental Protection Agency

Washington, DC 20460

Registration Amendment Other

OPP Identifier Number

251590

Application for Pesticide - Section I

1. Company/Product Number: 2693-174
2. EPA Product Manager: M. Johnson
3. Proposed Classification: [X] None [] Restricted
4. Company/Product (Name): Tri-Lux II Aerosol 490A Blue
5. Name and Address of Applicant: Courtaulds Coatings Inc., P.O. Box 386, Union, NJ 07083
6. Expedited Review: [X] Check if this is a new address

Section - II

Amendment - Explain below. Resubmission in response to Agency letter dated. Notification - Explain below. Final printed labels in response to Agency letter dated. "Me Too" Application. Other - Explain below.

NOTIFICATION MAY 22 1996

Explanation: Use additional page(s) if necessary. (For section I and Section II.) Notification - Correction of error in Container Disposal Statement.

Section - III

N/A

1. Material This Product Will Be Packaged In: Child-Resistant Packaging, Unit Packaging, Water Soluble Packaging, 2. Type of Container, 3. Location of Net Contents Information, 4. Size(s) Retail Container, 5. Location of Label Directions, 6. Manner in Which Label is Affixed to Product

Section - IV

1. Contact Point: Name John P. Pazdera, Title Pesticide Registration Mgr., Telephone No. 908-964-2288
Certification: I certify that the statements I have made on this form...
2. Signature: John P. Pazdera
3. Title: Pesticide Registration Mgr.
4. Typed Name: John P. Pazdera
5. Date: 4/26/96
6. Date Application Received: (Stamped)

276

US ENVIRONMENTAL PROTECTION AGENCY
OFFICE OF PESTICIDES PROGRAMS
REGISTRATION DIVISION (TS-767)
WASHINGTON, DC 20460

EPA REGISTRATION NO.
2693-174

DATE OF ISSUANCE
AUG 24 1994

TERM OF ISSUANCE

NOTICE OF PESTICIDE: REGISTRATION
 REREGISTRATION
(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

NAME OF PESTICIDE PRODUCT
TRI-LUX Aerosol 490A Blue

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Courtaulds Coatings Inc.
P. O. Box 1439
4000 South 13th Street
Louisville, KY 42001-1439

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:

1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for reregistration of your product under FIFRA section 4.

2. Make the labeling changes listed below before you release the product for shipment:

- a. Add the phrase "EPA Registration No. 2693-164" 174
- b. Include your complete EPA Establishment No. (i.e., company #- State abbreviation- site #) on the label.
- c. The revised, updated Confidential Statement of Formula dated December 22, 1993 is filled out correctly, it is in compliance with PR Notice 91-2. The Confidential Statement of Formula agrees with the label claim, the nominal concentration and is acceptable.

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

DATE

Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Sincerely,

Marshall Swindell
Acting Product Manager (31)
Antimicrobial Program Branch
Registration Division (7505C)

Enclosures

```

>>>>
>>>>
>>>>
>>>>

>>>>>
>>>>>
>>>>>
>>>>>
>>>>>
>>>>>
>>>>>
>>>>>


>>>>>
>>>>>
>>>>>
>>>>>
>>>>>

```

FRONT PANEL

INTERLUX

TRI-LUX II AEROSOL
490 A BLUE

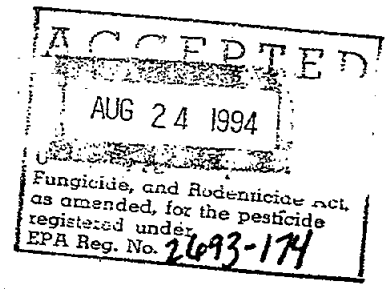

COPOLYMER ANTIFOULING PAINT

Active Ingredient:
Copper Thiocyanate = 9.16% . EPA Registration No. 2693-
Inert Ingredients: = 90.84%
100.0% EPA Establishment No. 2693-NJ-1

Contains Petroleum Distillates.

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

12 Fluid Ounces

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of Courtaulds Coatings Inc. including the surface preparation, proper application and the environmental conditions. Therefore, Courtaulds Coatings Inc. cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. COURTAULDS COATINGS INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtaulds Coatings Inc.'s option.

Courtaulds Coatings Inc.
400 S. 13th Street, Louisville, KY 40203

Union, NJ, Houston, TX, Montreal, Quebec

ACCEPTED
 AUG 24 1994
 Under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 2693-174

LEFT PANEL

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMAN AND DOMESTIC ANIMALS

WARNING

Causes eye irritation. harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT:

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.
 IF IN EYES: Flush with plenty of water. Get medical attention.
 IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
 IF INHALED: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

PHYSICAL OR CHEMICAL HAZARD:

Extremely Flammable. Content under pressure. Keep away from heat, sparks, open fire or heated surfaces. Do not puncture or incinerate container. Exposure to temperatures above 130 degrees F may cause bursting.


ENVIRONMENTAL HAZARD:

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL:

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.
 Container: Do not puncture or incinerate. A completely empty can be disposed of with household trash. Wrap in paper before disposing.

MEDICAL ADVISORY PHONE NUMBER: XXX-XXX-XXXX

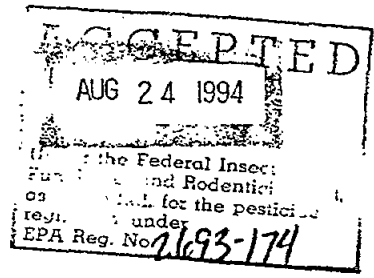

RIGHT PANEL

TRI-LUX II AEROSOL

Copolymer Antifouling Paint

DIRECTION FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION:

Tri-Lux II Aerosol is an antifouling paint specifically designed for application to aluminum outboard lower units and outdrives in conjunction with the specified primers.

SURFACE PREPARATION:

Previously Painted Surfaces: Clean surface of all contaminants and heavily sand existing paint with 80 grit sandpaper prior to application of 2-3 coats of TRI-lux II Aerosol.

Bare Aluminum: Clean bare metal with INTERLUX SPECIAL THINNER 216. Bring aluminum to a bright metal finish with coarse grit emery cloth. Wipe clean again with INTERLUX 216. Immediately apply 1 thin coat of INTERLUX VINYL-LUX PRIME WASH 353/354 thinned 25% with VINYL-LUX SOLVENT 355. Allow a minimum of 1 hour - maximum for 24 hours then overcoat with 2-3 coats of 360R UNDERWATER METAL PRIMER for best adhesion of the antifouling. Apply 2-3 coats of TRI-LUX II adhering to proper dry times.

Factory Painted Surfaces: Wipe surface clean with 216 INTERLUX SPECIAL THINNER to remove contaminants. Sand the surface with 120 grit production sandpaper. wipe the surface again with 216 INTERLUX SPECIAL THINNER to remove sanding residue. Apply 2 coats of 360R UNDERWATER METAL PRIMER, allowing appropriate dry times. After an overnight dry apply TRI-LUX II as specified below.

Paint Application:

- 1) Shake can well, listen for rattle of mixing ball. Continue shaking for a least one minute.
- 2) Hold container about 12-16 inches from unit when applying paint.
- 3) Apply two coats allowing a minimum of 6 hours at 75 degrees F, or 12 hours at 50 degrees F dry time between coats. Three coats are recommended, especially in warmer waters where evaporation rate is accelerated.
- 4) Be sure paint is completely dry before immersion, 6 hours at 75 degrees F or 12 hours at 50 degrees F.