

2693-174

7-15-2003

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

JUL 15 2003

1/5

International Paint Inc.
2270 Morris Avenue
Union, N.J. 07083

Attention: John P. Pazdera
Pesticide Registration Manager

Subject: Tri-Lux II Aerosol 490A Blue
EPA Registration No. 2693-174
Amendment Dated April 25, 2003

The amendment, submitted in connection with registration under the Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended, is acceptable.

- Response to PR Notice 2001-1

Minor Conditions

Include the following statement in the precautionary section.

“Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet”.

The statement “Hazards to Humans and Domestic Animals” must fall directly below the “Precautionary Statements” heading.

Adjust the formatting of your labeling so that the Ingredient Section falls directly above the Child Hazard Warning Statement “Keep Out Of Reach Of Children” and the signal word “WARNING”.

General Comments

Submit two (2) copies of the final printed labels for our review. A stamped copy of the accepted labeling is enclosed for your records.

CONCURRENCES							
SYMBOL							
SURNAME							
DATE							

2/5

Page 2
EPA Registration No. 2693-174

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,



Marshall Swindell
Product Manager 33
Regulatory Management Branch 1
Antimicrobials Division (7510C)

Enclosure

3/5

Tri-Lux II Aerosol 490 A BLUE

COPOLYMER ANTIFOULING PAINT

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional Precautionary Statements

12 Fluid Ounces

EPA Registration No. 2693-174

EPA Establishment No. 2693-NJ-1

Active Ingredient:

Cuprous Thiocyanate = 9.16%

Inert Ingredients: = 90.84%


100.00%

Contains Petroleum Distillates

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of Courtaulds Coatings Inc. including the surface preparation, proper application and the environmental conditions. Therefore, Courtaulds Coatings Inc. cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. COURTAULDS COATINGS INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtaulds Coatings Inc.'s option.

International Paint Inc.
2270 Morris Ave.
Union, NJ 07083

ACCEPTED
JUL 15 2003
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 2693-174

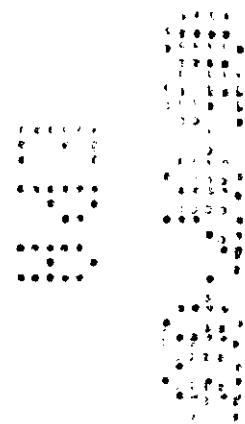

**PRECAUTIONARY STATEMENTS
WARNING
KEEP OUT OF REACH OF CHILDREN
HAZARD HUMANS AND DOMESTIC ANIMALS:**

Causes eye irritation. Harmful if swallowed or absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

PHYSICAL OR CHEMICAL HAZARD

Extremely flammable. Content under pressure. Keep away from heat, sparks open fire or heated surfaces. Do not puncture or incinerate container. Exposure to temperatures above 130 degrees F may cause bursting.

ENVIRONMENTAL HAZARD


This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food, feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Paint that cannot be used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL: Do not puncture or incinerate. A completely empty can can be disposed of with household trash. Wrap in paper before disposing.

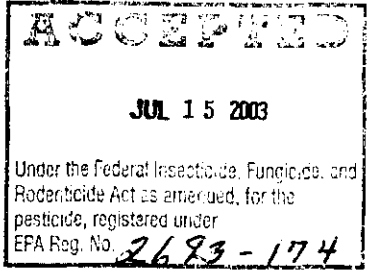

TRI-LUX II AEROSOL Copolymer Antifouling Paint

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION:

TRI-LUX II AEROSOL antifouling paint is formulated specifically for aluminum outboards, outdrives and aluminum boat hulls in underwater areas. When applied over properly primed metal TRI-LUX II AEROSOL will provide excellent antifouling protection.

TRI-LUX II is a true polishing copolymer that washes away with use, preventing buildup of old coatings. TRI-LUX II is for use in fresh, salt and brackish water.

APPLICATION SYSTEMS:

BARE ALUMINUM: Sand with medium grit emery cloth to a bright metal finish. Apply one thin coat of VINYLUX PRIMEWASH 353/354 that has been thinned 25% with VINYLUX SOLVENT 355. Allow to dry one hour but no more than twenty-four hours and apply the first coat of INTERLUX OUTBOARD AND OUTDRIVE AEROSOL PRIMER 370 to the entire underwater surface. Do not apply primer or TRI-LUX II AEROSOL above the true waterline. After applying at least 2 coats of primer, apply TRI-LUX II AEROSOL as specified below.

PREVIOUSLY PAINTED (with antifouling paint): Sand with 80 grit sandpaper. Wipe off sanding residue with INTERLUX SPECIAL THINNER 216. Re-sand any areas where the bare aluminum is exposed with medium grit emery cloth and wipe clean. Immediately apply INTERLUX OUTBOARD AND OUTDRIVE AEROSOL PRIMER 370 to bare areas. Apply at least two full coats of primer to the entire underwater surface. Do not apply primer or TRI-LUX II above the true waterline. Apply TRI-LUX II AEROSOL as specified below.

FACTORY PAINTED SURFACES (Underwater Surface Only): Wipe surface clean with INTERLUX SPECIAL THINNER 216 to remove contaminants. Sand the surface with 120 grit production sandpaper. Wipe the surface again with INTERLUX SPECIAL THINNER 216 to remove sanding residue. Apply at least 2 coats of INTERLUX OUTBOARD AND OUTDRIVE PRIMER 370, allowing appropriate dry times. After an overnight drying, apply at least one full can of TRI-LUX II AEROSOL as specified below. Do not apply primer or TRI-LUX II Aerosol above the true waterline.

TRI-LUX II AEROSOL APPLICATION

- 1) Shake can well, listen for rattle of mixing ball. Continue shaking for a least one minute.
- 2) Hold container about 12-16 inches from unit when applying paint. TRI-LUX II AEROSOL will be touch dry in about 30 minutes.
- 3) Apply contents of one can for each outdrive/outboard. Allow a minimum of 6 hours at 75 degrees F or 12 hours at 50 degrees F dry time between coats.
- 4) Be sure paint is completely dry before immersion, leave a minimum of 12 hours at 75 degrees or 16 hours at 50 degrees F prior to launch. ~~There is no maximum launch time.~~
- 5) Clean up - use INTERLUX SPECIAL THINNER 216.

