


FRONT PANEL



ANTIFOULING PAINT

FOR COMMERCIAL USE ONLY

Active Ingredient:

Cuprous Oxide = 38.19% EPA Registration No. 2693-178

Inert Ingredients: = 61.81%


EPA Establishment No. 2693-Tx-1

100.00%

Copper as Metallic = 34.57%

Contains Petroleum Distillates.

KEEP OUT OF REACH OF CHILDREN

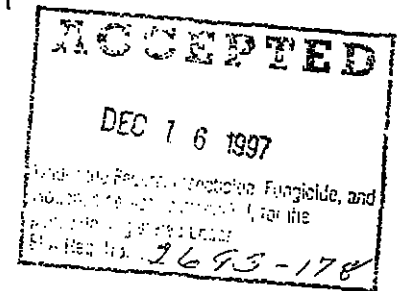

WARNING

See side panel for additional precautionary statements

NET CONTENTS: FIVE U.S. GALLONS (18.927 LITERS)

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of Courtaulds Coatings Inc. including the surface preparation, proper application and the environmental conditions. Therefore, Courtaulds Coatings Inc. cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. COURTAULDS COATINGS INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Courtaulds Coatings Inc.'s option.

Courtaulds Coatings Inc.
2270 Morris Ave, Union, NJ 07083

Union, NJ

Houston, TX

Louisville, KY

LEFT PANEL

PRECAUTIONARY STATEMENTS

WARNING

HAZARDS TO HUMAN AND DOMESTIC ANIMALS

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT:

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

IF IN EYES: Flush with plenty of water. Get medical attention.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARD:

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD:


Do not use or store near heat or open flame.

STORAGE AND DISPOSAL:

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State, or local disposal authorities.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

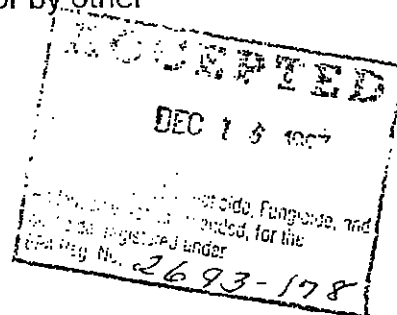

RIGHT PANEL

INTERSPEED BWA SERIES

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION:

This product is an antifouling protective coating resistant to algae, barnacles and other marine fouling in fresh, sea and brackish water on steel boat hulls. This product is for industrial use and professional application only. Not for sale to general public.

SURFACE PREPARATION AND COMPATIBILITY: Surface preparation directions must be followed exactly in order to ensure adhesion. Surface must always be clean and dry prior to painting.

GENERAL APPLICATION PROCEDURES: Airless spray is recommended: Tip Size 21-26 thou. inch. Pump ratio of 30:1 or greater., For small areas, brush or roller may be used but multiple coats may be required to achieve the required dry film thickness. It is recommended to apply by airless spray one (1) or two (2) full coats of this product.

MIXING AND THINNING INSTRUCTIONS: Mix thoroughly with power mixer prior to application. This coating is designed to be applied without thinning. Should thinning be necessary consult your International representative prior to altering this coating.

CLEAN UP: For tools, equipment, etc., use INTERNATIONAL GTA007.

MINIMUM DRY AND LAUNCHING TIMES: Minimum drying time between coats is 8 hours, and before launching is 16 hours at a temperature of 73°F.

THEORETICAL COVERAGE: 497 square feet per gallon, per coat at 2.0 mils D.F.T. Consult your International representative for practical application coverage. Practical square foot coverage per gallon, per coat is directly proportional to surface, application techniques and climatic conditions.

APPLICATION SYSTEMS

EXISTING ANTIFOULING SYSTEMS - GOOD CONDITION: High pressure fresh water wash with a minimum of 2500 p.s.i. and/or scrape to remove all marine growth, slime, salts, etc. Spot blast all areas of corrosion to a Near White Metal Standard of SSPC-SP10-85. Blow down with clean and dry high pressure air to remove all spent abrasives. Apply an approved underwater anticorrosive system.

POOR HULL CONDITIONS: For "optimum" results, blast entire area to a Near White Metal Standard SSPC-SP10-85. Apply an approved underwater anticorrosive system.

NEW SHIP CONSTRUCTION: Blast entire area to a Near White Metal Standard SSPC-SP10-85. Blow down with clean and dry high pressure air to remove all spent abrasives. Apply an approved underwater anticorrosive system.

