

2693-179

C 02/17/2010 C

1/8

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



United States
Environmental Protection
Agency

Office of Pesticide Programs

International Paints, LLC
2270 Morris Avenue
Union, N. J. 07083

FEB 17 2010

Attention: John P. Pazdera
Pesticide Registration Manager

Subject: Fiberglass Bottomkote 999 Bronze
EPA Registration No. 2693-179
Notification Dated February 1, 2010

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9).

Proposed Notification

- To revise Storage and Disposal statement per PR Notice 2007-4

General Comments

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been added to your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely

A handwritten signature in cursive script, appearing to read "Martha Terry".

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)



United States
Environmental Protection Agency
Washington, DC 20460

☐ Registration
☐ Amendment
☒ Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 2693-179	2. EPA Product Manager M. Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Fiberglass Bottomkote 999 Bronze	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) International Paint LLC 2270 Morris Ave. Union, NJ 07083 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

Notification - revise Storage and Disposal statement in accord with PR Notice 2007-4

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____		
* Certification must be submitted		If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt.	No. per container
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed to Product		<input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled		<input type="checkbox"/> Other _____	

Section - IV


1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)			
Name John P. Pazdera		Title Pesticide Regis. Manager	
		Telephone No. (Include Area Code) 908-964-2283	
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment both under applicable law.			
2. Signature <i>John P. Pazdera</i>		3. Title Pesticide Registration Manager	
4. Typed Name John P. Pazdera		5. Date Feb 1, 2010	
6. Date Application Received (Stamped) _____ _____ _____ _____			


**AkzoNobel**

Tomorrow's Answers Today

CERTIFICATION FOR NOTIFICATION

"Notification of label change per PR Notice 2007-4. This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or the Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA, and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA."

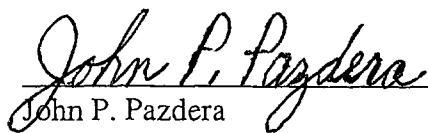
John P. Pazdera
Pesticide Registration Manager

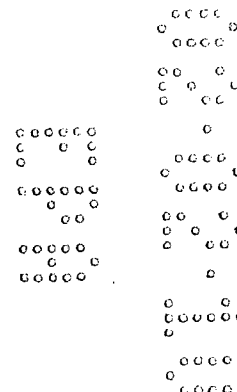



AkzoNobel

Tomorrow's Answers Today

Mr. Marshall Swindell
Product Manager 33
Regulatory Management Branch 1
Antimicrobial Division
Office of Pesticide Programs (7504P)
U.S. EPA
Room S-4900, One Potomac Yard
2777 South Crystal Drive
Arlington, VA 22202-4501

Via Federal Express

February 1, 2010

Re: Fiberglass Bottomkote 999 Bronze
EPA Reg. No. 2693-179
Notification-Response to PR Notice 2007-4

Dear Mr. Swindell:


The enclosed Notification pertains to our product Fiberglass Bottomkote 999 Bronze, EPA Reg. No. 2693-179. Specifically, we wish to make the following label change:

- Revise the Storage and Disposal statement in accord with PR Notice 2007-4.
No other changes are being made.

As this is an Agency-initiated amendment, no registration service fee is required.

In support of this application, please find enclosed:

- Application for Amendment Form (8570-1)
- Five (5) copies of revised labeling
- Copy of EPA stamped label dated 7/23/03
- Certification Statement

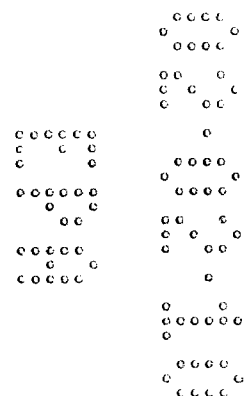

$\frac{5}{8}$

Very truly yours,

John P. Pazdera
Pesticide Registration Manager

Enclosures

A collection of 15 abstract, minimalist line drawings of various objects, including a chair, a table, a lamp, a clock, a vase, a bowl, a cup, a plate, a bottle, a box, a bag, a hat, a shoe, a car, a house, and a tree. Each drawing is composed of simple black lines on a white background.



FIBERGLASS BOTTOMKOTE®

999 BRONZE

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements.

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

DISCLAIMER: The use of this product is limited to the application of fiberglass bottom coatings on the hulls of boats. It is not intended for use on other surfaces. The use of this product on other surfaces is at the user's risk. The manufacturer assumes no liability for any damage or injury resulting from the use of this product on other surfaces. The manufacturer also assumes no liability for any damage or injury resulting from the use of this product on the hulls of boats. The manufacturer's warranty is limited to the product as described in this document. The manufacturer's warranty does not cover any damage or injury resulting from the use of this product on other surfaces. The manufacturer's warranty is limited to the product as described in this document. The manufacturer's warranty does not cover any damage or injury resulting from the use of this product on other surfaces.

EPA REG. NO. 24833-76
EPA EST. NO. 24833-76
ACTIVE
INGREDIENTS
Metallic Copper 23.2%
Inert Ingredients 76.8%
(100%)

6/8

PRECAUTIONARY STATEMENTS

WARNING

HAZARDS TO HUMANS AND DOMESTIC ANIMALS:

Causes eye irritation. Harmful if swallowed or absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

FIRST AID

If Swallowed:

- Call a poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

ENVIRONMENTAL HAZARD

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

Flammable. Keep away from heat and open flame.

STORAGE AND DISPOSAL


Do not contaminate water, food or feed by storage or disposal.

Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous.

Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

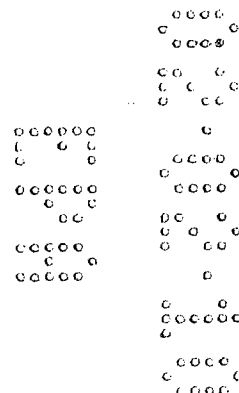

FIBERGLASS BOTTOMKOTE® 999 BRONZE

PRODUCT DESCRIPTION: FIBERGLASS BOTTOMKOTE® 999 BRONZE combines season long protection against fouling organisms with a hard, smooth racing finish. FIBERGLASS BOTTOMKOTE® 999 BRONZE uses an acrylic resin to provide ease of application and a hard finish that is compatible with most other types of antifouling paints. It also can be hauled out and trailered (on a short term basis) without losing its antifouling capability. FIBERGLASS BOTTOMKOTE® 999 BRONZE can also be wet sanded and burnished to provide an even smoother surface for racing sailboats or powerboats. FIBERGLASS BOTTOMKOTE® 999 BRONZE is for use below the waterline on fiberglass, wood and properly primed underwater metal boat hulls and parts (except aluminum). FIBERGLASS BOTTOMKOTE® 999 BRONZE is effective in fresh or low fouling saltwater on barnacles, and zebra mussels.

DIRECTION FOR USE:

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

COMPATIBILITY: FIBERGLASS BOTTOMKOTE® 999 BRONZE can be applied over most other hard antifouling paints, but it is important that these coatings be in excellent condition, well adhered to the hull and any loose or flaking paint must be removed. Soft antifouling paints must be removed.

V.O.C.: Less than 660 grams/liter.

THINNER: SPECIAL THINNER 216
BRUSH-EASE 433

THINNING: Thin only if necessary. Maximum 10%.

CLEAN UP: SPECIAL THINNER 216
BRUSH-EASE 433

THEORETICAL COVERAGE: 300 sq. ft./gal. yields 1 mils D.F.T.

DRY TIMES: Touch Dry 1 hour minimum.

77°F (25°C) Overcoat 2 hours minimum.

Launch 8 hours minimum 60 day maximum.

*Under good drying conditions paint may be overcoated after 2 hours, however it is best to allow an overnight dry to assure complete solvent evaporation. Lower temperature result in longer dry and launch times.

APPLICATION TEMPERATURES: 50°F (10°C) and above (air and hull).

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES - Good Condition: Remove all traces of loose paint and contamination by sanding the entire surface well with 80-120 grit production paper; wipe surface clean. Apply two coats of bottom paint.

Poor Condition: Completely remove all old paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass, INTERLUX® PINTOFF® 199 for wood and by sandblasting steel surfaces to a near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS - No Sand System: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202, changing rags frequently. Before liquid dries, wipe clean with a dry cloth. (Be sure all wax and other contaminants are removed). Repair imperfections with INTERLUX® EPOXY SURFACE & FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply one thin continuous coat of INTERLUX® NO SAND PRIMER AL200 with brush or roller. Do not spray, do not sand. Allow to cure between 2-3 hours - no more, no less. Apply two coats of bottom paint.

Sanding System: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202, changing rags frequently. Before liquid dries, wipe clean with a dry cloth. (Be sure all wax and other contaminants are removed). Repair imperfections with INTERLUX® EPOXY SURFACE & FAIRING COMPOUND 417A/418B; sand and wipe clean. Sand entire gelcoat well with 80-120 grit production paper until a flat, matte finish is obtained; wipe surface clean. Apply two coats of bottom paint.

BARE WOOD: Sand entire surface thoroughly to a smooth finish with 80 grit production paper; wipe surface clean. Repair imperfections with INTERLUX® EPOXY SURFACE & FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of bottom paint reduced with INTERLUX® SPECIAL THINNER 216 (10% maximum) to penetrate the porous grain. Fair seams with INTERLUX® SEAM COMPOUND 30. Apply second and third coats of bottom paint unthinned.

BARE STEEL: Sandblast surface to a near white metal; remove blast residue with broom and air hose. Within one hour of blasting apply the first coat of INTERPROTECT® 2000E/2001E. If application of INTERPROTECT® 2000E/2001E cannot be applied within one hour after blasting, apply one thin coat of VINYL-LUX® PRIMEWASH 353/354, that has been thinned 25% with VINYL-LUX® SOLVENT 355, prior to application of INTERPROTECT® 2000E/2001E. Apply at least 4 coats of INTERPROTECT® 2000E/2001E to reach a minimum dry paint film thickness of 10 mils. If sanding is necessary to smooth INTERPROTECT® 2000E/2001E, apply at least 15 mils of dry paint film thickness prior to sanding. If fairing is necessary, apply INTERLUX® EPOXY SURFACE & FAIRING COMPOUND 417A/418B or VC®-WATERITITE between first and second coats of INTERPROTECT® 2000E/2001E.

Rev. 6/95



For information call 908-686-1300

Or write: Interlux, 2270 Morris Ave., Union, NJ 07083

DISCLAIMER: The performance of any paint is dependent on many factors, including surface preparation, proper application and environmental conditions. Therefore, we cannot guarantee the durability of any particular product for any particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY ARE EXCLUDED. COATINGS COATINGS INC. SHALL NOT BE LIABLE FOR ANY DAMAGE TO OR LOSS OF PROPERTY OR CONSEQUENTIAL DAMAGES OF ANY KIND, INCLUDING BUT NOT LIMITED TO, THE REPAIR OR REPLACEMENT OF ANY COATINGS OR COATINGS COATINGS INC.

EPA REG NO. 655-170
EPA EST NO. 655-170-1

ACTIVE
INGREDIENT

INERT INGREDIENTS 71.65%
100.00%

International Paint Inc.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300

