



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY  
AND POLLUTION PREVENTION

July 22, 2020

Vanessa Villagran  
PSRA Specialist  
International Paint  
6001 Antone Drive  
Houston, TX 7791

Subject: Label Amendment – To update label language  
Product Name: Intersmooth® 360 Ecoloflex SPS Antifouling, BEA 368 Dark Brown  
EPA Registration Number: 2693-187  
Application Date: February 3, 2020  
Decision Number: 560104

Dear Ms. Villagran:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

The following alternate brand names have been added to the product record:

- Micron 66

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6. If you have any questions, you may contact Emilia Oiguenblik by phone at 703 347 0199, or via email at [Oiguenblik.emilia@epa.gov](mailto:Oiguenblik.emilia@epa.gov) or Eric Miederhoff by phone at 703 347 8028, or via email at [Miederhoff.eric@epa.gov](mailto:Miederhoff.eric@epa.gov)



Eric Miederhoff  
Product Manager 31  
Regulatory Management Branch I  
Antimicrobials Division (7510P)  
Office of Pesticide Programs


Enclosure: Stamped label

# Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown

[Self-Polishing, Long Life Copolymer]  
[Contains Biolux SPC\*]  
[True Self Polishing Copolymer Provides Excellent Antifouling Protection]  
[Can be used on any size boat]  
[Biolux\* Technology Controls Slime]

## Alternate Brand Names (ABNs):

- [INTERSMOOTH 460 ANTIFOULING BLACK BEA461/5]
- [INTERSMOOTH 460 ANTIFOULING BLUE BEA462/5]
- [INTERSMOOTH 460 ANTIFOULING DARK BROWN BEA468/5]
- [INTERSMOOTH 460 ANTIFOULING DARK RED BEA469/5]
- [INTERLUX MICRON 66 YBA470 BLUE]
- [INTERLUX MICRON 66 YBA471 GREEN]
- [INTERLUX MICRON 66 YBA472 RED]
- [INTERLUX MICRON 66 YBA473 BLACK]
- [INTERSMOOTH 360 ANTIFOULING DARK BROWN BEA368/5]
- [INTERSMOOTH 360 ANTIFOULING DARK RED BEA369/5]
- [INTERSMOOTH 360 BEA361/5 BLACK]
- [INTERSMOOTH 360 ECOLOFLEX SPC ANTIFOULING DARK BROWN BEA368/5]
- [INTERSMOOTH 360 ECOLOFLEX SPC ANTIFOULING DARK RED BEA369/5]
- [INTERSMOOTH 460 ECOLOFLEX SPC ANTIFOULING DARK BROWN BEA468/5]
- [INTERSMOOTH 460 ECOLOFLEX SPC ANTIFOULING DARK RED BEA469/5]
- [MICRON 66 YBA470 BLUE]
- [MICRON 66 YBA471 GREEN]
- [MICRON 66 YBA472 RED]
- [MICRON 66 YBA473 BLACK]
- [MICRON 66]

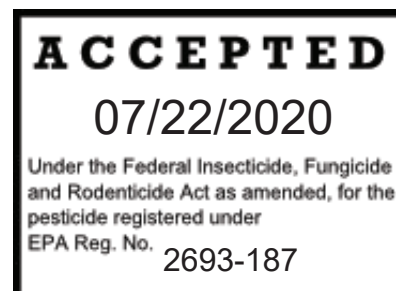

---

## Active Ingredients:

Cuprous Oxide	=	40.41%
Zinc 2-Pyridinethiol 1-Oxide*	=	3.80%

Other ingredients:	=	<u>55.79%</u>
		100.00%

COPPER AS METALLIC	=	35.89%
--------------------	---	--------

Contains petroleum distillates.

\* Zinc Pyrithione

---

**KEEP OUT OF REACH OF CHILDREN**

**DANGER**

See side panel for additional Precautionary Statement

EPA Reg. No.: 2693-187

EPA Est. No.: 2693-TX-1

[For specific state registrations contact your International Representative.]

NET CONTENTS:  
FIVE U.S. GALLONS (18.927 LITERS)

[Disclaimer]

The performance of any marine paint or coating depends on many factors outside the control of INTERNATIONAL PAINT, LLC., including surface preparations, proper application and environmental conditions. Therefore, INTERNATIONAL PAINT, LLC., cannot guarantee this product's suitability for your particular purpose of application. To the extent consistent with applicable law, INTERNATIONAL PAINT, LLC., EXPRESSLY DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE or otherwise that extend beyond the statements made on this label, and shall not be liable for special, incidental, or consequential damages resulting from the use or handling of this product, the exclusive remedy being the replacement of this product. To the extent consistent with applicable law, buyer/user assumes all risk of possession, handling, or use of this material when use and/or handling is contrary to label instructions.

**6001 Antoine Drive  
Houston, TX 77091**

**[[Interlux.com](http://Interlux.com)]**

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS  
KEEP OUT OF REACH OF CHILDREN  
DANGER**

Corrosive. Causes irreversible eye damage or skin burns. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Harmful if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses, or face shield), long-sleeved shirt and long pants, socks and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While painting or sanding or sandblasting boat surfaces, wear a minimum of a NIOSH-approved elastomeric half mask respirator with organic vapor (OV) cartridges and combination N, R, or P filters; OR a NIOSH-approved gas mask with OV canisters; OR a NIOSH-approved powered air purifying respirator with OV cartridges and combination HE filters.

Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

<b>FIRST AID</b>	
<b>If swallowed:</b>	<ul style="list-style-type: none"><li>• Call a poison control center or doctor immediately for treatment advice.</li><li>• Have person sip a glass of water if able to swallow.</li><li>• Do not induce vomiting unless told to do so by a poison control center or doctor.</li><li>• Do not give anything by mouth to an unconscious person.</li></ul>
<b>If on skin or clothing:</b>	<ul style="list-style-type: none"><li>• Take off contaminated clothing.</li><li>• Rinse skin immediately with plenty of water for 15-20 minutes</li><li>• Call a poison control center or doctor for treatment advice.</li></ul>
<b>If inhaled:</b>	<ul style="list-style-type: none"><li>• Move person to fresh air.</li><li>• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.</li><li>• Call a poison control center or doctor for further treatment advice.</li></ul>
<b>If in eyes:</b>	<ul style="list-style-type: none"><li>• Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li><li>• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li><li>• Call a poison control center or doctor for treatment advice.</li></ul>
<b>Other:</b> Have the product container or label with you when calling a poison control center or doctor or going for treatment. For medical emergencies, call the poison control center at 1-800-222-1222. For general information on this product, contact the National Pesticide Information Center (NPIC) at 1-800-858-7378, Monday through Friday, 8 AM to 12 PM PST, or at <a href="http://npic.orst.edu">http://npic.orst.edu</a> .	

**Note to Physician:** Contains petroleum distillate - vomiting may cause aspiration pneumonia.

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and particulates generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARD:** Flammable. Keep away from heat and open flame.

## STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

**STORAGE:** Exposure to air and extremes of temperature must be avoided. Keep the container firmly closed. Keep out of direct sunlight. Keep the containers in a dry, cool, well ventilated space and away from sources of heat and ignition.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER HANDLING:** Nonrefillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

**[Subset A- for Heavy Marine Applications  
BEA468, BEA469 formulas]**

**[Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name]**

**DIRECTIONS FOR USE**

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**PRODUCT DESCRIPTION** High performance, self-polishing copolymer (SPC) antifouling system with patented Copper Acrylate technology.

Produced in association with Nippon Paint Co; Ltd.

For Commercial Use Only

**Intended Uses:** Specifically designed for Deep Sea Vessels.  
For use and application by professionals at Maintenance and Repair facilities.

**PRODUCT INFORMATION**

Colour	[BEA468 Dark Brown; BEA469 Dark Red, BEA461 Black, BEA462 Blue]
Finish/Sheen	Not Applicable
Converter/Curing Agent	Not Applicable
Volume Solids	40% ±2% (ISO 3233-1998)
Typical Film Thickness	5 mils dry (12.5 mils wet)
Theoretical Coverage	128 ft <sup>2</sup> /U.S. Gal at 5 mils dft (dry film thickness), allow appropriate loss factors.
Method Of Application	Airless Spray; Brush, Roller (small areas only)
Flash Point	Single Pack 70°F
Induction Period	Not Applicable

<u>Substrate Temperature</u>	<u>23°F</u>	<u>41°F</u>	<u>77°F</u>	<u>95°F</u>
------------------------------	-------------	-------------	-------------	-------------

**DRYING INFORMATION**

Touch Dry [ISO 1517:73]	2 hrs	60 mins	40 mins	30 mins
Before Immersion 0-36 Month Schemes	30 hrs	20 hrs	16 hrs	10 hrs
Before Immersion 48-60 Month Schemes	Not recommended	48 hrs	36 hrs	24 hrs

**OVERCOATING DATA - see limitations**

Overcoated by:	Min	Max	Min	Max	Min	Max	Min	Max
Intersmooth 460 Ecoloflex SPC 0-36 Month Schemes	12 hrs	28 days	6 hrs	28 days	4 hrs	28 days	3 hrs	28 days
Intersmooth 460 Ecoloflex SPC 48-60 Month Schemes	Not recommended		18 hrs	28 days	12 hrs	28 days	9 hrs	28 days

Note: For 48-60 month schemes the times before flooding can revert to the times for 0-36 month schemes if:

- 1) the antifouling scheme is less than 15 mils (375 microns) dft in total or
  - 2) the vessel service speed is less than 15 knots
  - 3) for applications at 23°F (-5°C) only 2 coat schemes should be specified. It is not recommended that 3 or 4 coat schemes are applied at this temperature.
- Refer to Limitations section for maximum recommended atmospheric exposure time before flooding.  
Consult your International Representative for specific recommendations.

**REGULATORY DATA** VOC 508 g/lit (4.24 lb/US Gal) as supplied (EPA Method 24)

**SYSTEMS AND COMPATIBILITY** Consult your International Representative for the system best suited for the surfaces to be protected.

**SURFACE PREPARATIONS** Use in accordance with the standard Worldwide Marine Specifications. All surfaces to be coated should be clean, dry and free-from & contamination. High pressure fresh-water wash or fresh water wash, as appropriate, and remove all oil or grease, soluble contaminants and other foreign matter in accordance with SSPC-SP1 solvent cleaning.

#### MAJOR REFURBISHMENT

Areas of breakdown, damage etc. should be prepared to the specified standard (eg. Sa2<sup>1</sup>/<sub>2</sub> (ISO 8501-1:1988)) and primed prior to the application of [Intersmooth 460 SPC]. [Intersmooth 460 SPC] should always be applied over a recommended primer coating scheme. The primer surface should be dry and free from all contamination, and [Intersmooth 460 SPC] must be applied within the overcoating intervals specified for the primer (consult the relevant product data sheet).

#### REPAIR

Repair corroded areas with the recommended anticorrosive primer system and apply [Intersmooth 460 SPC] within the overcoating interval specified for the primer (consult relevant primer data sheets). Application of [Intersmooth 460 SPC] over itself: Clean the entire area with close high pressure fresh water washing using a fan-jet lance held close to the surface (3,000 psi. 211 kg/cm<sup>2</sup>) as soon as the vessel enters dock and before it dries out. Consult International for alternative methods of surface preparation.

Application of [Intersmooth 460 SPC] over other International or competitors antifoulings: Consult your International Representative for specific recommendations.

#### NOTE:

For use in Marine situations in North America, the following surface preparation standards can be used: SPC-SP10 in place of Sa 2<sup>1</sup>/<sub>2</sub> (ISO 8501-1:1988) APPLICATION

Mixing	This product is a one pack coating without additional components. Always mix thoroughly with a power agitator before application.
Thinner	Not recommended. Use International GTA007 only in exceptional circumstances (max 5% by volume). DO NOT thin more than allowed by local environmental legislation.
Airless Spray	Recommended. <ul style="list-style-type: none"><li>- Tip range 0.46 - 0.66 mm (18-26 thou)</li><li>- Total output fluid pressure at spray tip not less than 190 kg/cm<sup>2</sup> (2700 psi)</li></ul>
Conventional Spray	Do not apply by conventional spray.
Brush	Application by brush is for small areas only. Multiple coats may be required to achieve specified film thickness.
Roller	Application by roller is for small areas only. Multiple coats may be required to achieve specified film thickness.
Cleaner	International GTA007
Work Stoppages and Cleanup	Thoroughly flush all equipment with International GTA007. All unused product should be stored in tightly closed containers. Partially filled containers may show surface skinning and/or a viscosity increase of the product after storage.' Product should be filtered prior to use.
Welding	In the event welding or flame cutting is performed on metal coated with this product, dust and fumes will be emitted which



will require the use of appropriate personal protective equipment and adequate local exhaust ventilation. In North America do so in accordance with instruction in ANSI/ASC Z49.1 "Safety in Welding and Cutting."

#### SAFETY

All work involving the application and use of this product should be performed in compliance with all relevant national Health, Safety & Environmental standards and regulations. Prior to use, obtain, consult and follow the Material Safety Data Sheet for this product concerning health and safety information. Read and follow all precautionary notices on the Material Safety Data Sheet and container labels. If you do not fully understand these warnings and instructions or if you cannot strictly comply with them, do not use this product. Proper ventilation and protective measures must be provided during application and drying to keep solvent vapour concentrations within safe limits and to protect against toxic or oxygen deficient hazards. Take precautions to avoid skin and eye contact (i.e., gloves, goggles, face masks, barrier creams etc.) Actual safety measures are dependent on application methods and work environment EMERGENCY CONTACT NUMBERS: USA/Canada—Medical Advisory Number 1-800-854-6813.

#### LIMITATIONS

Coating lifetime is directly proportional to thickness applied. Performance of the product is dependent upon the specified film thickness being achieved. The Minimum Time Before Flooding and Overcoating Time is dependent upon film thickness and vessel speed. Please refer to the note in the Drying/Overcoating information section. Recommended maximum drying time before immersion:  
Temperate conditions - 28 days  
Tropical conditions - 28 days  
If these periods are exceeded the antifouling performance may be impaired.  
On immersion, [Intersmooth 460 SPC] will exhibit a slight colour change.

Overcoating information is given for guidance only and is subject to regional variation depending upon local climate and environmental conditions. Consult-your-local International Representative for specific recommendations.  
Apply in good weather. Temperature of the surface to be coated must be at least 3°C (5°F) above the dew point. For optimum application properties bring the product to 25-30°C (77-86°F), unless specifically instructed otherwise, prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage in accordance with information given in the STORAGE Section of this label. Technical and application data herein is for the purpose of establishing a general guideline of the coating application procedures. Test performance results were obtained in a controlled laboratory environment and International makes no claim that the exhibited published test results, or any other tests, accurately represent results found in all field environments. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of the coating.

#### UNIT SIZE

5 US gallons in a 5 US gallon container  
For availability of other unit sizes consult International.

#### UNIT SHIPPING WEIGHT

5 US gallon unit: 69 lb (31.3 kg)

#### STORAGE

Shelf Life (from date of manufacture)  
6 months minimum at temperatures up to 25°C (77°F). \*  
3 months minimum at temperatures greater than 25°C {77°F}, \*  
Subject to re-inspection thereafter. Store in dry, shaded conditions away from sources of heat and Ignition.

\* Note: Active ingredients remain stable, but application properties may be affected

#### WORLDWIDE AVAILABILITY

Consult International.

#### [DISCLAIMER]

*The information in this data sheet is not intended to be exhaustive: any person using the product for any purpose other than that specifically recommended in this data sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. All advice we give or statements made about the product (whether in this data sheet or otherwise) is correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing Jo do so, we do not accept any liability at all for the performance of the product or*

*for (subject to law) any loss or damage arising out of the use of She product. All products supplied and technical advice given are subject to our standard terms and conditions of sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is liable to modification from time to time in light of experience and our policy of continuous development. It is the user's responsibility to check that this data sheet is current prior to using the product.*

## [Subset B - for Yacht Applications]

### [Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66]

#### Product Description

[Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] is a long-lasting Self Polishing Copolymer that is formulated with Biolux® Technology to provide powerful antifouling performance. This self-polishing copolymer resin and Biolux Technology enables this product to provide a premium level of antifouling protection. This technology also allows the boat to be hauled and launched without recoating. Because [Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] self polishes it will become smoother with use, which will reduce drag and fuel consumption. The polishing action of [Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] also reduces build-up of old spent coatings and minimizes sanding at reapplication. [Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [This product] is for use below the waterline on fiberglass, wood and properly primed metal boat hulls and parts, in salt and brackish waters. Do not use in fresh water.

#### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

#### Preparation

##### PREVIOUSLY PAINTED - Good Condition:

TBT Copolymers: Vacuum sand or Wet sand the surface with [80, 100, 80-100] [grit, grade, (grit)] sand paper to a clean firmly attached surface. Remove sanding residue. Apply one coat of [Primocon, Primocon Primer, Underwater Metal Primer].

Non-TBT Copolymers: Vacuum sand or Wet sand the surface with [80, 100, 80-100] [grit, grade, (grit)] sand paper to a clean firmly attached surface. Remove sanding residue.

Hard Antifouling: Vacuum sand or Wet sand the surface with [80, 100, 80-100] [grit, grade, (grit)] sand paper to a clean firmly attached surface. Remove sanding residue. Apply one coat of [Primocon, Primocon Primer, Underwater Metal Primer].

**PREVIOUSLY PAINTED - POOR CONDITION:** Completely remove all old antifouling paint [by paint stripper, sanding, abrasive media blasting, sanding or abrasive media blasting] for [fiberglass, epoxy, wood, or, sandblasting steel surfaces to a near white metal]. Proceed with application system for bare system below.

**BARE FIBERGLASS - (POLYESTER OR VINYLESTER) SURFACE PREPARATION:** It is very important that bare fiberglass be properly prepared in order to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following products: [Interlux Fiberglass Surface Prep YMA601V, Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Solvent Wash 202, Fiberglass Surface Prep, Solvent Wash, Acetone, Boat Prep] following the product label instructions. To be certain that all the contamination has been removed, run water over the surface; if the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surfaces has been properly cleaned, proceed with one of the application systems below.

**BARE FIBERGLASS - NO SAND SYSTEM:** Clean the surface using [Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Boat Prep] following the preparation procedure described. Apply one coat of [InterProtect 2000E, InterProtect HS, InterProtect, Sandless Primer] following the label instructions for applying the primer and overcoating with antifouling paint. Apply 2 coats of [Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] allowing for the appropriate dry times.

**BARE FIBERGLASS - SANDING SYSTEM:** Sand the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Interlux Fiberglass Solvent Wash 202, Fiberglass Solvent Wash 202, Fiberglass Solvent Wash, Solvent Wash, Acetone, Boat Thinner, Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Surface Prep, Boat Surface Prep] to remove sanding residue. Repair any surface imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler, Epoxy Filler, Boat Filler]. Sand and wipe clean. Apply 2 coats of [Intersmooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] allowing for appropriate dry times.

**BARE WOOD:** Sand the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Fiberglass Solvent Wash 202, Interlux Fiberglass Solvent Wash 202, Solvent Wash, Boat Thinner, Brush Ease 433]. Repair imperfections with

[Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler]. Apply the first coat of this product thinned 10% with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease]. Fill seams with [Seam Compound 30, Seam Compound, Seam Filler], if necessary. Apply 2nd coat of [Intermooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] unthinned, following the overcoating times.

**ALUMINUM AND STEEL:** Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals.

### Application

For applications by residential (non-commercial) users:

- Do not apply by airless spray
- Apply only in outdoor, non-enclosed spaces

**MIXING AND THINNING INSTRUCTIONS:** Shake and mix well. Stir continuously while using.

Thin only when necessary with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease] (not to exceed 10% by volume).

**GENERAL APPLICATION PROCEDURES:** Apply 2 full coats of [Intermooth® 360 Ecoloflex SPC Antifouling BEA 368 Dark Brown], [Alternate Brand Name], [Micron® 66], [this product] by brush or (solvent resistant) 3/8" nap roller. If during application, brush pulls or roller drags, use [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease] to improve handling. Ensure proper coverage at high wear areas such as the waterline, bow, and keel areas.

**THINNER:** [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease] Do not exceed 10% maximum

**CLEAN UP:** [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease]

**THEORETICAL COVERAGE:** 320 square feet per gallon, per coat at 2,0 mil D.F.T.

**V.O.C.:** Less than 525 grams/liter

**APPLICATION TEMPERATURE:** 41°F (5°C)\* and above (air and hull)

Dry Time Chart

Temperature (Air and Hull)	Touch Dry	Overcoating Time	Immersion Time	
		Minimum	Minimum	Maximum*
F° (C°)				
41° (5°)	3 Hours	12 Hours	24 Hours	30 days
61° (15°)	2 Hours	8 Hours	18 Hours	30 days
73° (23°)	30 Minutes	6 Hours	12 Hours	30 days
95° (35°)	30 Minutes	4 Hours	12 Hours	30 days

\*If more than 30 days have passed powerwash, lightly wet sand or use water and a stiff brush to clean and reactivate the surface before overcoating or before immersion.

Caution: If this product is to be sprayed, it must only be applied by professional spray applicators utilizing the proper solvent and safety equipment.

[Color difference may occur between actual paint and color swatch on front of can.]

[Interlux, Micron, 66, Biolux and the AkzoNobel logo are trademarks of AkzoNobel. © AkzoNobel 2019.]