



U.S. ENVIRONMENTAL PROTECTION AGENCY
Office of Pesticide Programs
Antimicrobials Division (7510C)
1200 Pennsylvania Avenue, N.W.
Washington, D.C. 20460

EPA Reg. Number:
2693-200

Date of Issuance:
JUN 08 2005

NOTICE OF PESTICIDE:

Registration
 Re-registration

(under FIFRA, as amended)

Term of Issuance:
**Time Limited; expires
midnight on 9/30/06**

Name of Pesticide Product:
"Multi-Micron Antifouling Blue"

Name and Address of Registrant (include ZIP code):

International Paint, Inc.
2270 Morris Avenue
Union, NJ 07083

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA Section 3(c)(7)(A) provided you:

1. Submit and/or cite all data required for registration of your product under FIFRA Section 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA Section 4.

2. The following submitted data must be found acceptable.

73-1 Whole sediment acute freshwater invertebrate

73-2 Whole sediment acute marine invertebrate

850.5400 Marine diatom Skeletonema costatum

850.4225 Seedling emergence in rice

850.5400 Vegetative vigor dose response in rice

Signature of Approving Official:

Marshall Swindell, Product Manager, Team 33,
Regulatory Management Branch I,
Antimicrobials Division

Date:

JUN 08 2005

3. Submit by 1/1/05, data to satisfy the following requirements.

875.1100 Dermal exposure - outdoor

875.1300 Inhalation exposure - outdoor

4. Submit the following “reserved” studies within **12 months** of the date of the Agency’s written request for these data. The need for these reserved data will be based upon the results of one or more of the above studies as determined by the Agency.


- GLN 72-5 Fish Life Cycle
- GLN 72-7 Simulated or actual field testing for aquatic organisms
- GLN 71-4 Avian Reproduction
- GLN 73-3 Acute Pore Water Studies (fish and invertebrates)
- GLN 74-1 Whole Sediment Chronic Study (invertebrates)
- Special Study: Monitoring of Representative U.S. Waters
- GLN 162-1 Aerobic Soil Metabolism
- GLN 162-2 Anaerobic Soil Metabolism
- GLN 164-2 Aquatic Field Study
- GLN 165-5 Accumulation Study (Nontarget organism)
- GLN (Not Assigned) Monitoring of Representative US Waters

This conditional registration will expire automatically on 9/30/06. If you fail to satisfy the conditions imposed in this registration, EPA may issue a Notice of Intent to Cancel under Section 6(e) of FIFRA. Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label stamped “accepted with comments” is enclosed for your records.

If you have any questions concerning this letter, please contact myself at 703-308-6341, or Tony Kish at (703) 308-9443.

Sincerely,



Marshall Swindell

Product Manager 33

Regulatory Management Branch 1

Antimicrobial Division(7510C)

Enclosure

Multi-Micron Antifouling Blue

Active Ingredients:

Cuprous Oxide	34.34%
Zinc 2-Pyridinethiol 1-Oxide*	3.04%

Inert Ingredients:

<u>62.62%</u>
100.00%

COPPER AS METALLIC = 30.50%

Contains petroleum distillates.
* Zinc Pyrithione

KEEP OUT OF REACH OF CHILDREN

DANGER

- See side panel for additional Precautionary Statement-

EPA Reg. No.: 2693-200

EPA Est. No.: 2693-NJ-1


**NET CONTENTS:
ONE GALLON (3.875 LITERS)**

**ACCEPTED
with COMMENTS
in EPA Letter Dated:**

JUN 0 8 2005

**Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.**

2693-200

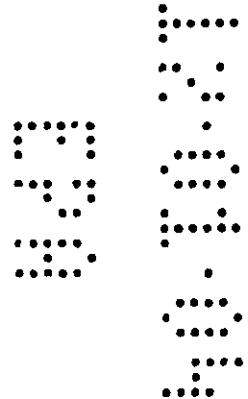

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
KEEP OUT OF REACH OF CHILDREN
DANGER**

Danger. Causes skin burns. Causes substantial but temporary eye injury. May be fatal if inhaled. Do not get in eyes, on skin, or on clothing. Do not breathe dust, vapor, spray mist. Wash thoroughly with soap and water after handling and before eating, drinking, or using tobacco. Remove contaminated clothing and wash clothing before reuse.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses, or face shield), long-sleeved shirt and long pants, socks and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifoulant paint, commercial users must wear a respirator with an organic vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges, and prefilters as required by commercial users.

STATEMENT OF PRACTICAL TREATMENT

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

**ACCEPTED
with COMMENTS
in EPA Letter Dated:**

JUN 08 2005
Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.
2693-200

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia. Probable mucosal damage may contraindicate the use of gastric lavage.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: FLAMMABLE! Keep away from heat and open flame.

STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Keep away from heat and open flame. Keep product container tight and upright to prevent leakage. Keep container closed when not in use. Absorb and dispose of spillages in accordance with local applicable regulations.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Open dumping is prohibited. Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and dispose of in an approved landfill. Consult Federal, State or local disposal authorities for approved alternative procedures.

**ACCEPTED
with COMMENTS
in EPA Letter Dated:**

JUN 08 2005

**Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.**

2693-200

687

Product Description

Multi-Micron Antifouling offers an entirely new development in antifouling paint technology that provides exceptional protection from all types of shell and weed fouling. This product uses Biolux® Technology that provides even better slime resistance than its predecessor Micron 44. Multi-Micron Antifouling is a multi-season, self-polishing copolymer that washes away over time similar to a bar of soap. This results in reduced build up of old coatings and minimizes sanding at reapplication. This copolymer technology also allows the boat to be hauled and relaunched without recoating. Multi-Micron Antifouling is for use below the waterline on fiberglass, wood and properly primed metal boat hulls and parts. Do not use on aluminum unless contacting Interlux Technical Service Department at 1-800-468-7589. Multi-Micron Antifouling can be used in fresh, salt and brackish waters. Multi-Micron Antifouling can be applied by brush and roller. Wet sand only; do not dry sand.

This product is a Tributyltin (TBT) free, long lasting self-polishing copolymer that is formulated to provide outstanding antifouling performance.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

ACCEPTED
with COMMENTS
to EPA Letter Dated: :

JUN 08 2005

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, and the Federal
Insecticide, Fungicide,
and Rodenticide Act as
amended, EPA Reg. No.

Preparation

PREVIOUSLY PAINTED (All surfaces) – Good Condition: Wet sand the surface with 80-grit wet-or-dry sandpaper, wipe with Special Thinner 216 to remove sanding residue.

PREVIOUSLY PAINTED (All surfaces) – Poor Condition: Remove all old antifouling paint using Interstrip 299E. Wet sand and wipe clean with Fiberglass Solvent Wash 202.

BARE FIBERGLASS - (POLYESTER OR VINYLESTER)

SURFACE PREPARATION: Wipe surface with Fiberglass Solvent Wash 202 or use Fiberglass Surface Prep YMA601.

BARE FIBERGLASS – No Sand System: Repair any surface imperfections using Interprotect® Watertite®. Wet sand and wipe clean. Apply one thin, continuous coat of Interlux Fiberglass Primer. Follow application directions for primer.

BARE FIBERGLASS – Sanding System: Wet sand the entire surface with 80-grit sandpaper and wipe with Fiberglass Solvent Wash 202. Repair any surface imperfections with Interprotect Watertite. Wet sand and wipe clean.

BARE WOOD: Wet sand the surface with 80-grit sandpaper, wipe surface with Special Thinner 216. Apply the first coat 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux® Seam Compound 30 (if necessary). Repair imperfections with Interprotect Watertite. Wet sand and wipe clean. Apply 2 additional coats.

UNDERWATER METALS: Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals.

Application

For applications by residential (non-commercial) users:

- Do not apply by airless spray
- Do not apply more than one coat of this product within 24 hours
- Apply only in outdoor, non-enclosed spaces

MIXING AND THINNING INSTRUCTIONS: Shake and mix well. Stir continuously while using. Thin only when necessary with Interlux Brush Ease 433 or Interlux Special Thinner 216 (not to exceed 10% by volume).

GENERAL APPLICATION PROCEDURES: Apply at least 2 full coats by brush or (solvent resistant) 3/8" nap roller. If during application, brush pulls or roller drags, use Interlux Brush Ease 433 to improve handling. Apply an extra coat to high wear areas such as the waterline, bow, and keel areas.

THINNER: Special Thinner 216 or Brush-Ease 433

Do not exceed 10% maximum

CLEAN UP: For tools, equipment, etc. use Interlux Special Thinner 216 or Brush-Ease 433

THEORETICAL COVERAGE: 320 square feet per gallon, per coat at 2.0 mil Dry Film Thickness (DFT).

V.O.C.: less than 525 grams/liter.

APPLICATION TEMPERATURE: 50°F (10°C)*and above (air and hull)

Temperature F° (C°)	Touch Dry	Overcoating Time		Immersion Time	
		Minimum	Maximum	Minimum	Maximum
50° (10°)	3 Hours	16 Hours	30 days	16 Hours	30 days
60° (15°)	2 Hours	12 Hours	30 days	12 Hours	30 days
75° (24°)	1 Hour	12 Hours	30 days	12 Hours	30 days
95° (35°)	30 Minutes	8 Hours	30 days	8 Hours	30 days

International Paint Inc.
2270 Morris Avenue
Union, NJ 07083

ACCEPTED
with **COMMENTS**
in EPA Letter Dated:

JUN 08 2005

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

2693-200