

2693-225

07/05/2011

1/13

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, D.C. 20460



Office of Pesticide Programs

JUL 5 2011

International Paints, LLC  
2270 Morris Avenue  
Union, N. J. 07083

Attention: John P. Pazdera  
Pesticide Registration Manager

Subject: Latenac II Antifouling Red  
EPA Registration No. 2693-225  
Notification Dated June 22, 2011

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9).

Proposed Notification

Revise the Storage and Disposal statement per PR Notice 2007-4

General Comments

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been added to your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely

Marshall Swindell  
Product Manager (33)  
Regulatory Management Branch 1  
Antimicrobials Division (7510P)

Please read instructions on reverse before completing form.

Form Approved OMB No. 2070-0060

Print Form



United States  
Environmental Protection Agency  
Washington, DC 20460

<input type="checkbox"/>	Registration
<input type="checkbox"/>	Amendment
<input checked="" type="checkbox"/>	Other

OPP Identifier Number

### Application for Pesticide - Section I

1. Company/Product Number 2693-225	2. EPA Product Manager M. Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Latenac II Antifouling Red	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) International Paint LLC 2270 Morris Ave. Union NJ 07093 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: <input checked="" type="checkbox"/> EPA Reg. No. _____ Product Name _____	

### Section - II

<input type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)


Notification - revise Storage and Disposal statement in accord with PR Notice 2007-4

### Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Metal Plastic Glass Paper Other (Specify) _____		
* Certification must be submitted	If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt	No. per container	
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed to Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled			<input type="checkbox"/> Other _____		

### Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name John P. Pazdera	Title Pesticide Regis. Manager	Telephone No. (Include Area Code) 908-964-2288
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature <i>John P. Pazdera</i>	3. Title Pesticide Registration Manager	
4. Typed Name John P. Pazdera	5. Date Jun 22, 2011	

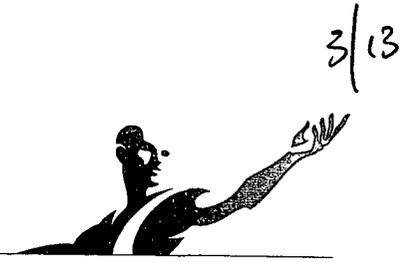

**AkzoNobel**  
Tomorrow's Answers Today

Mr. Marshall Swindell  
Product Manager 33  
Regulatory Management Branch 1  
Antimicrobial Division  
Office of Pesticide Programs (7504P)  
U.S. EPA  
Room S-4900, One Potomac Yard  
2777 South Crystal Drive  
Arlington, VA 22202-4501

Via Federal Express

June 22, 2011

Re: Latenac II Antifouling Red  
EPA Reg. No. 2693-225  
Notification/Response to PR Notice 2007-4

Dear Mr. Swindell:


The enclosed Notification pertains to our product Latenac II Antifouling Red, EPA Reg. No. 2693-225. Specifically, we wish to make the following label change:

- Revise the Storage and Disposal statement in accord with PR Notice 2007-4. No other changes are being made.

As this is an Agency-initiated amendment, no registration service fee is required.

In support of this application, please find enclosed:


- Application for Amendment Form (8570-1)
- Five (5) copies of revised labeling
- Copy of EPA stamped label dated 10/21/08
- Certification Statement

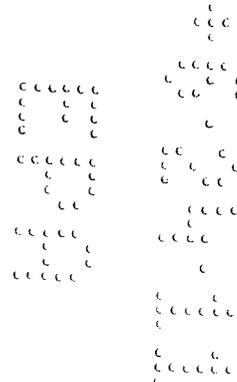

Mr. Marshall Swindell  
June 22, 2011  
Page 2

Please do not hesitate to contact me at 908-964-2288 if there are any questions concerning this submission.


Very truly yours,

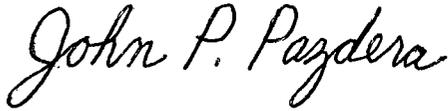

John P. Pazdera  
Pesticide Registration Manager

JPP/cd

Enclosures

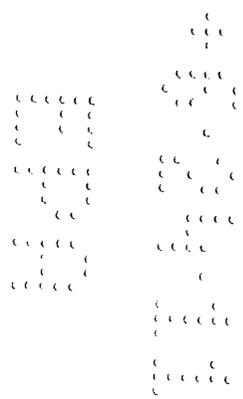




**AkzoNobel**

Tomorrow's Answers Today

**CERTIFICATION FOR NOTIFICATION**

**“Notification of label change per PR Notice 2007-4. This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA’s regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or the Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA, and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.”**

*John P. Pazdera*  
\_\_\_\_\_  
John P. Pazdera  
Pesticide Registration Manager

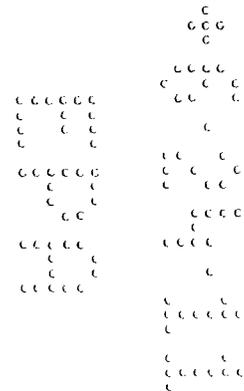

# Latenac II Antifouling Red

**Dependable Season Long Protection  
Fast Dry, Paint and Launch the Same Day  
Compatible Over Most Antifouling Paints**

---

Active Ingredient:		
Cuprous Oxide	= 33.40%	EPA Registration No. 2693- 225
Inert Ingredients:	= <u>66.60%</u>	
	100.00%	EPA Establishment No. 2693-NJ-1
Copper as Metallic	= 29.66%	

---

Contains Petroleum Distillates.

KEEP OUT OF REACH OF CHILDREN


## WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

**DISCLAIMER:** The performance of any marine coating depends on many factors outside the control of International Paint LLC, including the surface preparation, proper application and the environmental conditions. Therefore, International Paint LLC cannot guarantee the suitability of this product for your particular purpose or application. **IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC SHALL NOT, UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.** By purchase or use of the product buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at the discretion of International Paint LLC.

**International Paint LLC  
2270 Morris Avenue  
Union, New Jersey 07083**

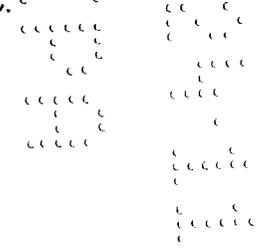

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS  
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

**FIRST AID**

**If Swallowed:**

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give **any** liquid to the person.
- Do not give anything by mouth to an unconscious person.

**If on skin or clothing:**

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

**If inhaled:**

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

**If in eyes:**

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.


**Other:** Have the product container or label with you when calling a poison control center or doctor or going for treatment.

**Note to Physician:** Contains petroleum distillate – vomiting may cause aspiration pneumonia.

**ENVIRONMENTAL HAZARDS**

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.


**PHYSICAL OR CHEMICAL HAZARD:** Flammable. Keep away from heat and open flame.

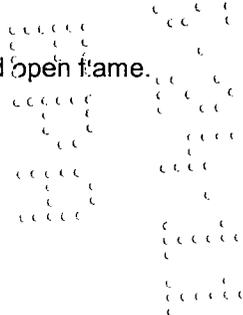

**STORAGE AND DISPOSAL:** Do not contaminate water, food, feed by storage or disposal. Open dumping is prohibited.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

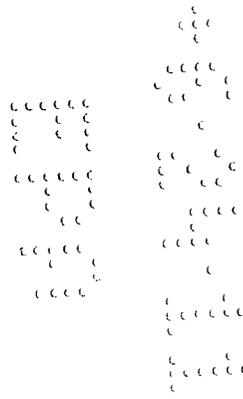

**[Subset A – For use on Pleasure Craft]**

**PRODUCT DESCRIPTION:**

This product is performance, value and reliability all in one. The fast dry formula allows the boat to be painted and launched in the same day and can be applied directly over most properly prepared antifouling paints. This product is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. It can be used in fresh, salt and brackish waters.

**DIRECTIONS FOR USE:**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**COMPATIBILITY:** This product can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been thoroughly sanded with 80 grit wet-or-dry sandpaper.

<b>V.O.C.:</b> Less than 480 grams/liter. (4.0 lbs./gal.)	<b>THEORETICAL COVERAGE:</b> 400 sq. ft./gal. yields 2 mils dry film thickness
<b>THINNER:</b> Interlux Special Thinner 216 or Interlux Brush Ease 433	<b>THINNING:</b> Thin only when necessary. Do not to exceed 10% maximum.
<b>CLEAN UP:</b> Interlux Special Thinner 216 or Interlux Brush Ease 433	<b>APPLICATION TEMPERATURE:</b> 50°F (10°C)* and above (air and hull).

**ESTIMATED DRY TIMES:**

Temperature °F (°C)	Touch Dry	Overcoating Time Minimum	Immersion Time	
			Minimum	Maximum
50°F (10°C)	3 Hours	6 Hours	12 Hours	60 Days
60°F (15°C)	2 Hours	5 Hours	10 Hours	60 Days
75°F (24°C)	1 Hour	4 Hours	8 Hours	60 Days
95°F (35°C)	30 Minutes	2 Hours	6 Hours	60 Days

\*If the air temperature falls below 50°F (10°C) during the dry time extend the dry times by 12 hours minimum.

## PREPARATION

### PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit wet-or-dry sandpaper; wipe surface clean with Interlux Special Thinner 216. Apply at least 2 coats of this product.

### PREVIOUSLY PAINTED SURFACES - POOR CONDITION:

Completely remove all old antifouling paint, using Interlux Interstrip 299E for fiberglass, and wood, and by sandblasting to near white metal for steel. Follow application systems below.

### BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All-Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following Interlux products. Fiberglass Surface Prep YMA601 or Fiberglass Solvent Wash 202 following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

## APPLICATION SYSTEMS

### BARE FIBERGLASS - NO SAND SYSTEM:

Clean the surface following the preparation procedure above. Apply one coat, of Interlux InterProtect® 2000 or YPA200 Fiberglass No-Sand Primer following the label instructions for applying the primer and overcoating with antifouling paint. Apply two coats of this product, allowing for the appropriate dry times.

### BARE FIBERGLASS - SANDING SYSTEM:

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Interlux Fiberglass Solvent Wash 202. Sand and wipe clean. Apply two coats of this product allowing for appropriate dry times.

**BARE WOOD:**

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Interlux Special Thinner 216. Apply the first coat of this product thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux Seam Compound 30 (if necessary). Apply two more coats of this product unthinned, allowing for the appropriate dry times.

**UNDERWATER METALS:**

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

**COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN.**

### [Subset B: Alternate Directions for Use for Pleasure Craft]

#### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**PRODUCT DESCRIPTION:** This product uses Micron technology to provide excellent, long lasting antifouling protection against all types of fouling. These products are designed to wear away (polish) at a controlled rate similar to a bar of soap. As a result there will be a reduced buildup of old coatings and minimized sanding at reapplication. In addition, this technology allows the boat to be hauled and relaunched the following season without repainting. This product dries to bright colors. It will provide excellent antifouling longevity against all types of algae, weeds, barnacles, and other shell fouling. This product can be used below the waterline in fresh, salt or brackish water on fiberglass, wood and properly primed metal boat hull and parts. Do not use on aluminum.

**COMPATIBILITY:** This product can be applied over most antifouling paints as long as the old coating is tightly adhered, is in sound condition, and has been thoroughly sanded with 80 grit wet-or-dry sandpaper. Soft antifouling paints will need to be removed or overcoated with Primocon® before applying.

<b>VOC:</b> Less than 385 grams/liter (3.21 lbs./gallon) as supplied	<b>THINNING:</b> Thin only when necessary. Do not exceed 10% by volume.
<b>DRY TIMES:</b> Touch Dry - 2 hours At 77°F (25°C) Dry to overcoat - 16 hours minimum*  Dry to launch - 16 hours minimum*	<b>THINNER:</b> Brushing - Brush-Ease 433™  Spraying - Special Thinner 216™
<b>THEORETICAL COVERAGE:</b> 495 sq.ft./gallon. Yields 2 mils dry film thickness.	<b>CLEAN-UP:</b> Special Thinner 216™ or Brush-Ease 433™.
<b>APPLICATION TEMPERATURES:</b> 50°F (10°C) and above. (Air and hull). * If either hull or air temperature falls below 50°F (10°C) during the 16 hour dry time extend the dry time to a minimum of 36 hours.	

#### APPLICATION SYSTEMS

**GENERAL APPLICATION PROCEDURES:** Shake or mix well prior to use. Apply at least 2 full coats (3 coats on bare wood) of this product by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. If during application, brush pulls or roller drags, use Interlux Brush-Ease 433™ to improve handling. Certain areas of hull experience faster polishing than other areas. These areas include the waterline, the leading edge of the keel and rudder, and the bow stem. On these areas, it is suggested that an additional coat of paint be applied to insure that this product does not wash away before the other areas of the bottom.

**PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:** Remove all traces of loose paint and contamination by sanding the entire surface well with 80-grit wet or dry sandpaper; wipe surface clean with Interlux Special Thinner 216™. Apply at least 2 coats of this product, allowing proper dry times.

**PREVIOUSLY PAINTED SURFACES - POOR CONDITION:** Completely remove all old antifouling paint with Interlux Interstrip® 299E for fiberglass, wood and by sandblasting steel surfaces to a near white metal. Proceed with application system for bare work as described below.

**BARE FIBERGLASS:**

It is very important that bare fiberglass be properly prepared to completely remove the mold release wax in order to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using Interlux All- Purpose Boat Soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following Interlux Fiberglass Surface Prep or Interlux Fiberglass Solvent Wash following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surface has been properly cleaned, proceed with one of the application systems below.

**BARE FIBERGLASS - NO SAND SYSTEM:** Clean the surface following the preparation procedure above. Apply one coat of Interlux InterProtect® 2000 or Interlux No Sand Primer YPA200, following the label instructions for applying the primer, and overcoating with antifouling paint. Apply two coats of this product, allowing for the appropriate dry times.

**BARE FIBERGLASS - SANDING SYSTEM:** Clean the surface following the preparation procedure described above. Repair any surface imperfections using Watertite Epoxy Filler. Sand and wipe clean. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Fiberglass Solvent Wash 202™. Apply at least 2 coats of this product.

**BARE WOOD:** Sand entire surface thoroughly with 80 grit production sandpaper; wipe surface clean with Interlux Brush-Ease 433™. Repair imperfections with Watertite Epoxy Filler; sand and wipe clean. Apply first coat of this product reduced with Interlux Brush-Ease 433™ (10% maximum). Fill seams with Interlux Seam Compound 30 between first and second coats of this product.

**UNDERWATER METALS:** Contact the Interlux Technical Service Department at 1-800-468- 7589 for full details on how to properly prime underwater metals. Do not use on aluminum.

**NOTE:** This product may change color at the waterline.

**Color difference may occur between actual paint and color swatch on front of can.**