

2693-228

03-26-2010

1/1

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



Office of Pesticide Programs

International Paints, LLC
2270 Morris Avenue
Union, N. J. 07083

MAR 26 2010

Attention: John P. Pazdera
Pesticide Registration Manager

Subject: Uni-Kote HT – Black
EPA Registration No. 2693-228
Notification Dated March 10, 2010

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9).

Proposed Notification

- Minor Label Changes

General Comments

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been added to your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,


Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)

an Akzo Nobel brand


International Paint LLC
2270 Morris Avenue
Union
New Jersey
07083
Tel (908) 686-1300
Fax (908) 686-8545
www.yachtpaint.com

CERTIFICATION FOR NOTIFICATION

“This notification is consistent with the provisions of PR Notice 95-2 and EPA regulations at 40 CFR 152.46, and no other changes have been made to the labeling or the confidential statement of formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms of PR Notice 95-2 and 40 CFR 152.46, this product may be in violation of FIFRA, and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.”

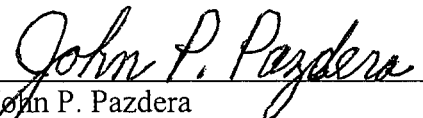

John P. Pazdera
Pesticide Registration Manager

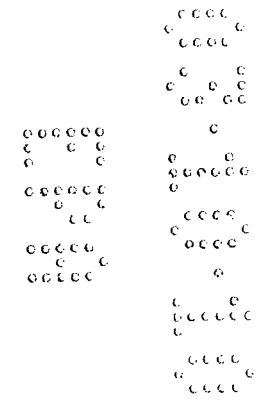



AkzoNobel

Tomorrow's Answers Today

Mr. Marshall Swindell
Product Manager (33)
Regulatory Management Branch I
Antimicrobial Division (7504P)
U.S. EPA
Room S-4900, One Potomac Yard
2777 South Crystal Drive
Arlington, VA 22202-4501

Via Federal Express

March 10, 2010

Re: Uni-Kote HT - Black
EPA Reg. No. 2693-228
Notification – Minor Label Changes

Dear Mr. Swindell:

The enclosed Notification pertains to our product Uni-Kote HT - Black, EPA Reg. No. 2693-228. Specifically, we wish to make the following labeling changes:


- Add Product Descriptors to the front panel.
- Revise the Precautionary Statements in accord with EPA letter dated 1/15/10.
- Revise the Physical or Chemical Hazard section in accord with EPA letter dated 1/15/10.
- Revise Product Description section in accord with comments in EPA letter dated 1/15/10.
- Correct typographical errors in Dry Time chart (in Overcoating & Immersion Time sections).

No other changes are being made. For reference, a copy of the EPA-stamped label dated 1/15/10 is also enclosed.

As this is a Notification as described in PR Notice 98-10, no registration service fee is required.

Enclosed, therefore, please find:

- EPA Form 8570-1
- Five (5) copies of revised labeling
- Copy of EPA-stamped label dated 1/15/10
- Certification Statement

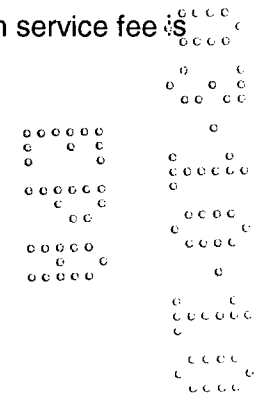

Uni-Kote HT - Black

Dual resin technology
Universal for use on all power and sailboats
Durable coating yet minimizes paint build up
Fast dry, paint and launch the same day

Active Ingredient:

Cuprous Oxide = 25.00%
Inert Ingredients: = 75.00%
100.00%

EPA Registration No. 2693-228

EPA Establishment No. 2693-NJ-1

Copper as Metallic = 22.20%


Contains Petroleum Distillates.

KEEP OUT OF REACH OF CHILDREN

WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

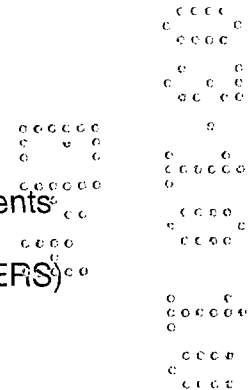

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of International Paint LLC, including the surface preparation, proper application and the environmental conditions. Therefore, International Paint LLC cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of the product buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at the discretion of International Paint LLC.

International Paint LLC
2270 Morris Avenue
Union, New Jersey 07083

2
11

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mine Safety and Health Administration(MSHA) and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Non-refillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

Uni-Kote HT

PRODUCT DESCRIPTION: Uni-Kote HT uses a dual resin technology that provides a universal durable, fast dry antifouling paint that delivers the benefits of both hard and polishing antifouling paints for use on all power and sailboats. The universal formula of Uni-Kote HT has durability of a traditional hard paint but has a slow polishing mechanism built-in that continuously smoothes and renews the active surface avoiding the heavy build-up of paint layers much like a polishing paint. The fast dry formula allows the boat to be painted and launched in the same day. Uni-Kote HT provides clean stable colors for effective season-long protection. Uni-Kote HT is recommended for use on the underwater areas of fiberglass, wood, and properly primed metal (except aluminum) boat hulls. It can be used in fresh, salt and brackish waters.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

COMPATIBILITY: Uni-Kote HT can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been thoroughly sanded with 80 grit wet-or-dry sandpaper. Uni-Kote HT can be applied by brush, roller or spray.

V.O.C.: Less than 465 grams/liter. (3.9 lbs. /gal.).	THEORETICAL COVERAGE: 400 sq. ft./gal at 2 mils dry film thickness.
THINNER: Interlux Special Thinner 216 or Interlux Brush Ease 433.	THINNING: Thin only when necessary. Do not to exceed 10% maximum.
CLEAN UP: Special Thinner 216 or Brush Ease 433.	APPLICATION TEMPERATURE: 50°F (10°C)* and above (air and hull).

ESTIMATED DRY TIMES:

Temperature °F (°C)	Touch Dry	Overcoating Time Minimum	Immersion Time	
			Minimum	Maximum
50°F (10°C)	3 Hours	6 Hours	12 Hours	60 Days
60°F (15°C)	2 Hours	4 Hours	10 Hours	60 Days
75°F (24°C)	1 Hour	2 Hours	6 Hours	60 Days
95°F (35°C)	30 Minutes	1 Hours	3 Hours	60 Days

*If the air temperature falls below 50°F (10°C) during the dry time extend the dry times by 12 hours minimum.

PREPARATION

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit wet-or-dry sandpaper; wipe surface clean with Special Thinner 216. Apply at least 2 coats of Uni-Kote HT.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION:

Completely remove all old antifouling paint, using Interlux Interstrip 299E for fiberglass, and wood, and by sandblasting or grinding to near white metal for steel. Follow application systems below.

BARE FIBERGLASS:

It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Remove mold release wax and surface contamination by using one of the following Interlux products: Fiberglass Surface Prep YMA601 or Fiberglass Solvent Wash 202 following the product label instructions. Fill any surface imperfections with Interlux Watertite YAV135 following the label instructions. After the surface has been properly cleaned, proceed with one of the application systems below.

APPLICATION SYSTEMS

BARE FIBERGLASS - NO SAND SYSTEM:

Clean the surface following the preparation procedure above. Apply one coat, of Interlux InterProtect® 2000 or Fiberglass No-Sand Primer YPA200 following the label instructions for applying the primer and over coating with antifouling paint. Apply two coats of Uni-Kote HT, allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM:

Clean the surface following the preparation procedure above for bare fiberglass. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Fiberglass Solvent Wash 202. Sand and wipe clean. Apply two coats of Uni-Kote HT allowing for appropriate dry times.

BARE FIBERGLASS - BLISTER PREVENTION SYSTEM:

Apply the InterProtect system for the prevention of blisters. Contact the Interlux Technical Service Department at 1-800-468-7589 or visiting yachtpaint.com for complete instructions on the application of the InterProtect system.

BARE WOOD:

Sand the entire surface with 80-grit sandpaper. Wipe the sanding residue off the surface with Special Thinner 216. Apply the first coat of Uni-Kote HT thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux Seam Compound 30 (if necessary). Apply two more coats of Uni-Kote HT unthinned, allowing for the appropriate dry times.

UNDERWATER METALS:

Contact the Interlux Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals or steel hulls. More systems and information available on www.yachtpaint.com. DO NOT USE ON ALUMINUM.

COLOR DIFFERENCE MAY OCCUR BETWEEN ACTUAL PAINT AND COLOR SWATCH ON FRONT OF CAN.