



NOTICE OF PESTICIDE:

Registration  
 Reregistration  
(under FIFRA, as amended)

EPA Reg. Number:

2693-238

Date of Issuance:

11/23/2020

Term of Issuance:

Conditional

Name of Pesticide Product:

Micron Latitude

Name and Address of Registrant (include ZIP Code):

Bathsheba Njuguna  
International Paint, LLC  
6001 Antoine Drive  
Houston, TX 77091

**Note:** Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A). You must comply with the following conditions:

1. Submit and/or cite all data required for registration/reregistration/registration review of your product under FIFRA when the Agency requires all registrants of similar products to submit such data.

Signature of Approving Official:

Eric Miederhoff  
Product Manager 31  
Regulatory Management Branch I  
Antimicrobials Division (7510P)  
Office of Pesticide Programs

Date:

11/23/2020

2. You are required to comply with the data requirements described in the DCI or EDSP Order identified below:

a. Cuprous Oxide GDCI-025601-1257

You must comply with all of the data requirements within the established deadlines. If you have questions about the Generic DCI or EDSP Order listed above, you may contact the Reevaluation Team Leader (Team 36): <http://www2.epa.gov/pesticide-contacts/contacts-office-pesticide-programs-antimicrobial-division>

3. The data requirements for storage stability and corrosion characteristics (Guidelines 830.6317 and 830.6320) are not satisfied. A one year study is required to satisfy these data requirements. You have 18 months from the date of registration to provide these data.

4. Make the following label changes before you release the product for shipment:

- Revise the EPA Registration Number to read, “EPA Reg. No. 2693-238.”

5. Submit one copy of the final printed label for the record before you release the product for shipment.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) lists examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Assurance.

If you fail to satisfy these data requirements, EPA will consider appropriate regulatory action including, among other things, cancellation under FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions. A stamped copy of the label is enclosed for your records. Please also note that the record for this product currently contains the following CSFs:


- Basic CSF Micron Latitude Black dated 11/16/2020
- Alternate CSF Micron Latitude Green dated 11/16/2020
- Alternate CSF Micron Latitude Red dated 11/16/2020
- Alternate CSF Micron Latitude Blue dated 11/16/2020
- Alternate CSF Micron Latitude Dark Blue dated 11/16/2020

The following alternate brand names have been added to the product record:

Interlux Micron Extra SPC Black  
Interlux Micron Extra SPC Blue  
Interlux Micron Extra SPC Dark Blue  
Interlux Micron Extra SPC Red  
Interlux Micron Extra SPC Green

If you have any questions, please contact Karen M. Leavy by phone at (703)-308-6237, or via email at [Leavy.Karen@epa.gov](mailto:Leavy.Karen@epa.gov).

Enclosure

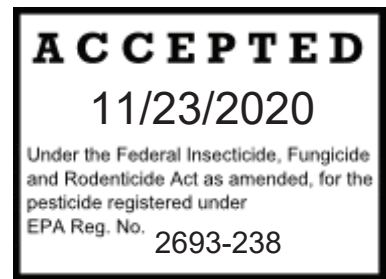

**Micron Latitude**

- [Self-Polishing Copolymer for Consistent Protection even while Stationary]
- [Outstanding Performance in All Conditions and All Waters]
- [Micron SPC Technology – Multi-Seasonal – Haul and Relaunch]
- [Easy to apply – Fast Drying – High Solids]
- [Self-Polishing Copolymer – Smoother Finish Increases Fuel Efficiencies]
- [Multi-Seasonal Protection – Haul and Relaunch without Repainting]
- [Self-Polishing Copolymer –Multi-Season - No Paint Build-Up]
- [All the benefits of Micron Technology]


---

**Alternative Brand Names (ABNs)**

- [[Interlux][Micron Extra SPC Black]]
- [[Interlux][Micron Extra SPC Blue]]
- [[Interlux][Micron Extra SPC Dark Blue]]
- [[Interlux][Micron Extra SPC Red]]
- [[Interlux][Micron Extra SPC Green]]

---

**[GRAPHICS]**

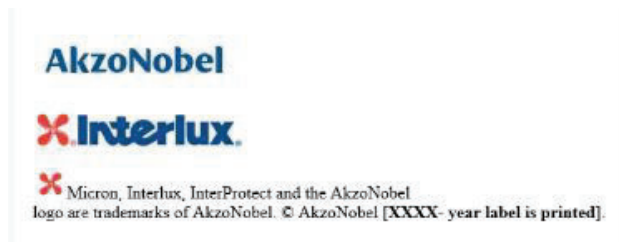

---

**KEEP OUT OF REACH OF CHILDREN**

**WARNING**

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

EPA Registration No. 2693-XXX  
EPA Establishment No. 2693-TX-1

**Active Ingredient:**

Cuprous Oxide = 38.00%  
CAS #1317-39-1

**Other Ingredients:** = 62.00%  
100.00%

**Metallic Copper:** = 33.44%

\*Contains Petroleum Distillates, xylene or xylene range aromatic solvents

**DISCLAIMER:** The performance of any marine paint or coating depends on many factors outside the control of INTERNATIONAL PAINT, LLC., including surface preparations, proper application and environmental conditions. Therefore, INTERNATIONAL PAINT, LLC., cannot guarantee this product's suitability for your particular purpose of application. To the extent consistent with applicable law, INTERNATIONAL PAINT, LLC., EXPRESSLY DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE or otherwise that extend beyond the statements made on this label, and shall not be liable for special, incidental, or consequential damages resulting from the use or handling of this product, the exclusive remedy being the replacement of this product. To the extent consistent with applicable law, buyer/user assumes all risk of possession, handling, or use of this material when use and/or handling is contrary to label instructions.

**International Paint, LLC.  
6001 Antoine Drive  
Houston, Texas 77091**

[SIDE PANEL]

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**WARNING**

WARNING. Causes skin irritation and moderate eye irritation. Do not get on skin or on clothing. Avoid contact with eyes. Wear long-sleeved shirt and long pants, chemical-resistant gloves and chemical-resistant footwear. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using restroom. Remove and wash contaminated clothing before reuse. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not breathe vapor or spray mist.

While painting or sanding or sandblasting boat surfaces, wear a minimum of a NIOSH approved respirator with an organic vapor (OV) cartridge with a combination N, R, or P filter with NIOSH approval number prefix TC-84A; or a NIOSH approved gas mask with a canister with NIOSH approval number prefix TC – 14G; or powered air purifying respirator with organic vapor (OV) cartridge and combination HE filter with NIOSH approval number prefix TC-23C. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

<b>FIRST AID</b>	
<b>If swallowed:</b>	<ul style="list-style-type: none"><li>• Call a poison control center or doctor immediately for treatment advice.</li><li>• Have person sip a glass of water if able to swallow.</li><li>• Do not induce vomiting unless told to do so by a poison control center or doctor.</li><li>• Do not give anything by mouth to an unconscious person.</li></ul>
<b>If inhaled:</b>	<ul style="list-style-type: none"><li>• Move person to fresh air.</li><li>• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.</li><li>• Call a poison control, center or doctor for further treatment advice.</li></ul>
<b>If in eyes:</b>	<ul style="list-style-type: none"><li>• Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li><li>• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li><li>• Call a poison control center or doctor for treatment advice.</li></ul>
<b>If on skin or clothing:</b>	<ul style="list-style-type: none"><li>• Take off contaminated clothing.</li><li>• Rinse skin immediately with plenty of water for 15-20 minutes.</li><li>• Call a poison control center or doctor for treatment advice.</li></ul>
<b>General Information:</b> Have the product container or label with you when calling a poison control center or doctor or going for treatment. For non-emergency and general information on product use, etc., information pertaining to this product, call the National Pesticides Information Center (NPIC) at 1-800-858-7378, 8:00-12:00 pm Pacific Time, Monday-Friday, email: <a href="mailto:npic@ace.orst.edu">npic@ace.orst.edu</a> ; or website: <a href="http://npic.orst.edu/">http://npic.orst.edu/</a> . You may also contact the poison control center 1-800-222-1222 for emergency medical treatment information.	

**Note to Physician:** Probable mucosal damage may contraindicate the use of gastric lavage.

**ENVIRONMENTAL HAZARD**

This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System [NPDES] permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARDS**

**Combustible.** Do not use or store near heat or open flame.

**[Subset A – Directions for Use for Pleasure Craft]**

**[This Product] [Alternate Brand Names]**

**Product Description**

[This Product] [Alternate Brand Names] is a high performance Self-Polishing Copolymer (SPC) antifouling developed for premium multi-seasonal performance in all waters. [This Product] [Alternate Brand Name] can be launched and relaunched without recoating. The Self-Polishing Copolymer technology is designed to wear away at a constant rate whether the boat is moving or at dock getting smoother, improving hull efficiencies minimizing paint build up, with consistent premium performance. [This Product] [Alternate Brand Names] can be used on all boats and in all waters – salt, brackish and fresh water

**DIRECTIONS FOR USE**

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

<p><b>STORAGE AND DISPOSAL</b></p> <p>Do not contaminate water, food or feed by storage or disposal.</p> <p><b>STORAGE:</b> Exposure to air and extremes of temperature should be avoided. Keep the container firmly closed. Keep out of direct sunlight.</p> <p><b>PESTICIDE DISPOSAL:</b> Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.</p> <p><b>CONTAINER HANDLING:</b> Nonrefillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.</p>
---

**GENERAL DESCRIPTION**

**GENERAL PREPARATION:** [This Product] [Alternate Brand Names] can be applied over most other antifouling paints provided the old coating is tightly adhered, is in sound condition and has been [properly prepped, sanded] [with] [80,100, 120, 80-120] [grit, grade, grit wet and dry, grade wet or dry] [sandpaper]. Surface must always be clean and dry prior to painting.

**MIXING INSTRUCTIONS:** Shake or mix [This Product][Alternate Brand Name] well prior to use. Do not apply thin coats and care must be taken not to over-apply as this can impact overcoating and immersion times. The service life of [This Product] [Alternate Brand Names] is directly related to the amount of paint applied.

<b>V.O.C.:</b> Less than 329g/l 2.75lbs/gal yield	<b>Theoretical Coverage:</b> 407sq.ft/gallon (Roller/Brush) (4 mils [WFT, Wet Film Thickness]) (2.4 mils [DFT, dry film thickness])
<b>Thinner:</b> [Special Thinner 216, Special Thinner, Thinner 216, Yacht Thinner, Brush Ease 433, Brush Ease, Acetone]	<b>Application:</b> Stir or shake thoroughly and apply 2 coats by brush, roller, or spray (where allowed). Follow overcoat applications systems below. Contact Interlux for usage and necessary priming instructions on large aluminum hulls, not for use on small aluminum boats.
<b>Thinning:</b> Thin only when necessary. Do not exceed 10% maximum by volume	<b>Application Temperatures:</b> 41°F (5°C)* to 95°F (35°C) (air and hull)
<b>Clean-Up:</b> [Special Thinner 216, Special Thinner, Thinner 216, Yacht Thinner, Brush Ease 433, Brush Ease, Acetone]	

## DRY TIMES

Temperature °F (°C) *	Touch Dry	Overcoating	Immersion Time Minimum
41°F (5°C)	1 Hour	16 Hours	24 Hours
59°F (15°C)	45 Mins	10 hours	18 hours
73°F (23°C)	30 Mins	6 hours	12 hours
95°F (35°C)	20 Mins	4 hours	8 hours

\*If the air temperature falls below 41°F (5°C) during the dry time prior to immersion, extend the dry times 12 hours minimum.

## APPLICATION SYSTEMS

**PREVIOUSLY PAINTED Good Condition:** Remove all traces of loose paint and contamination by sanding the entire surface with [80, 80-120, 100, 120] [grit, grade, wet or dry] sandpaper. Remove sanding residue. Apply 2 coats of [This Product] [Alternate Brand Names]

**PREVIOUSLY PAINTED Poor Condition:** Completely remove all old antifouling paint [by] [paint stripper, sanding, abrasive media blasting, sanding or abrasive media blasting] for [fiberglass, epoxy, wood, or, sandblasting steel surfaces to a near white metal]. Proceed with application system for bare system below.

**BARE FIBERGLASS** – It is particularly important that bare fiberglass be properly prepared in order to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following products: [Interlux Fiberglass Surface Prep YMA601V, Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V or Fiberglass Solvent Wash 202, Fiberglass Surface Prep, Solvent Wash, Acetone, Boat Prep] [following the product label instructions]. To be certain that all the contamination has been removed, run water over the surface; if the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surfaces has been thoroughly cleaned, proceed with one of the application systems below.

**No Sand Method:** Clean the surface following the preparation procedure described. Apply one coat of [InterProtect 2000E, InterProtect HS, InterProtect, Sandless Primer] following the label instructions for applying the primer and overcoating with antifouling paint. Apply 2 coats [this product][ alternate brand name] **following the overcoating times.**

**Sanding Method:** Clean the surface following the preparations procedure described. Sand the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Interlux Fiberglass Solvent Wash 202, Fiberglass Solvent Wash 202, Fiberglass Solvent Wash, Solvent Wash, Acetone, Boat Thinner, Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Surface Prep, Boat Surface Prep] to remove sanding residue. Repair any surface imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler, Epoxy Filler, Boat Filler]. Sand and wipe clean. Apply 2 [this product][ alternate brand name] coats following the overcoating times.

**Blister Prevention System:** Apply the InterProtect system for the prevention of blisters. Contact the Interlux Technical Service Department at 800-468-7589 or visiting interlux.com for complete instructions on the application of the InterProtect system.

**NEW & BARE WOOD:** Sand the entire surface [with] [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Fiberglass Solvent Wash 202, Interlux Fiberglass Solvent Wash 202, Solvent Wash, Boat Thinner]. Repair imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler]. Apply the first coat of this product thinned 10% with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease]. Fill seams with Seam Compound 30, if necessary. Apply 2nd coat of un-thinned, following the overcoating times.

**PREVIOUSLY PAINTED STEEL:** Remove all loose paint, rust and surface contamination by sanding or using a wire brush; wipe surface clean. Touch up bare spots by roughening with [80, 60, 60-80] [grit, grade]



[sand paper, production paper] then spot priming with 3 coats of [Interlux Primocon, Interlux InterProtect 2000E, InterProtect HS, InterProtect, Primocon, Underwater Metal Primer, Boat Metal Primer]; follow overcoat times between coats and prior to application of antifouling. Apply 2 coats [this product][ alternate brand name following the overcoating times.

**NEW STEEL:** Sandblast to a near white finish; wipe surface clean. Immediately apply one coat of [InterProtect 2000E, Interlux InterProtect 2000E, Interlux InterProtect HS, InterProtect HS, InterProtect] thinned 15% with [Interlux 2333n, Interlux 2316n, Brushing Reducer 2333n, Spray Reducer 2316n]. Fill in all imperfections with [Interlux Watertite Epoxy Filler, Watertite Epoxy Filler, Interlux Interfill Epoxy Filler, Interfill Epoxy Filler, Interlux Epoxy Filler, Epoxy Filler]. Sand filled areas smooth; wipe clean. Apply [2,2-3, 3,3-4,3-5,4,5] coats of [InterProtect 2000E, Interlux InterProtect 2000E, Interlux InterProtect HS, InterProtect HS, InterProtect, Primocon, Interlux Primocon, Underwater Metal Primer, Metal Primer, Boat Metal Primer]. Apply two [this product][ alternate brand name coats following the overcoating times.

**Underwater Metals:** Contact the Interlux Technical Service Department at [Interlux.com, interluxtechnicalservice@akzonobel.com, 1-800-468-7589] for full information on how to properly prime underwater metals. Contact Interlux for usage and necessary priming instructions for application on large aluminum hulls, not for use on small aluminum boats.

#### [Maintenance]

[Antifouling are not effective under all conditions. Pollution, usage and natural occurrences can adversely affect an antifouling paint's performance. Therefore, we strongly suggest that the antifouling paints are checked regularly to make sure it is clean and that no growth is occurring. The less a boat is used, and the longer the idle periods are, the higher the chance of fouling. Aggressive cleaning of antifouling paints, using tools such as scrubbing pads and brushes, will shorten the effective life of the paint, and should only be used if necessary.]

- [1. Thinning of this product may affect the VOC compliance of this product.]
- [2. Please consult your local government regulations for recommendations for volatile organic compound (VOC) limits.]
- [3. Color difference may occur between actual paint and color swatch on front of can]