
NET

No. 45 CONCENTRATE

GALLONS

PHOENIX

CONA

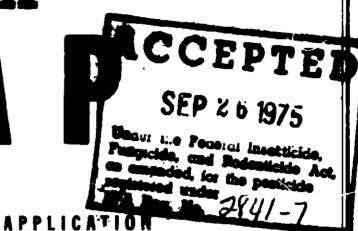

"REG. U. S. PAT. OFF."

DILUTION

Before using dilute with 2 parts by volume of mineral spirits, sene, light fuel oil, or peguivalent.

See Manufacturer's Wood Treating Specifications Tech. Bul. CN-400 Hot-Cold Method.

WOOD PRESERTATIVE COPPER NAPHTHENATE BASE

For open tank and pressure treatment of lumber, timber, posts, poles, other forest products to control decay and attack by termites. Protects wood against blue stain, mold, mildew, Lyctus (Powder Post) Beetles. Green in color. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned and immersed in the product (dilute product) for a period of 12 to 48 hours to be an effective wood preserver. Lumber intended to be in contact with the soil should be dipped for a minimum of 3 minutes or if treated by the brush or spray method, receive two or more flowing coats of the product. For protection against termites, treat wood prior to use in construction.

ASSAY

ACTIVE INGREDIENTS:

Copper Naphthenate 27.16% Petroleum Solvent 72.84% Copper as metallic 3.6%

E.P.A. Reg. No. 2841-7

E.P.A. Est. 2841-GA-1

CAUTION

Keep Out Reach of Children

Harmful if swallowed. Avoid breathing of vapor. Do not get in eyes. Avoid skin contact. Wash thoroughly. Do not use, pour, spill or store near heat or open flame. CONAP Solutions are noncorrosive to metals. Will not bleed thru paint if the wood is thoroughly dry after treatment.

This product is toxic to fish. Keep out of lakes, streams, or ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

"Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supplies."

PHOENIX OIL COMPANY

CHEMICAL DEPARTMENT 625 - 5th STPEET AUGUSTA, GA. 30903