




SUPER FLAVR-GARD

WATER FILTER, BACTERIOSTATIC.
MODEL SG-2AG

EPA Reg. No. 4800-0001 U.S. EPA Reg. No. 2933-12
U.S. EPA Reg. No. 2933

ACTIVE INGREDIENT Silver*, as elemental 0.4%
*from Silver nitrate

INERT INGREDIENT Carbon 99.6%

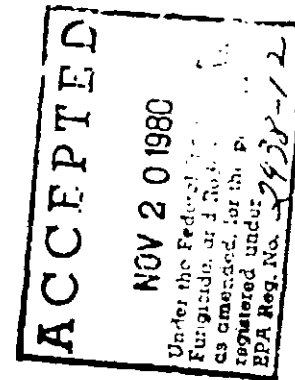

CAUTION:
KEEP OUT OF REACH OF CHILDREN

DIRECTIONS FOR USE

- GENERAL CLASSIFICATION: This is a violation of Federal law if you use this product in a manner inconsistent with its label.
 - FLOW: MAXIMUM 5 Gallons per minute.
 - USE ONLY ON MUNICIPALLY TREATED TAP WATER.
 - Removes most unpleasant water tastes and odors including chlorine by activated carbon adsorption.
 - Always rinse at use.
 - The unit has a capacity of up to 1000 gallons. It is suitable for treating 10 gallons of standard tap water for a period of 12 months.
 - Combine with a reverse osmosis (RO) or Gard activated carbon cartridge.
1. REMOVE FILTER WATER TAP WATER
2. REMOVE LEAKS, DAMPNESS, AND CONDENSATION
3. REMOVE BACTERIA FROM TAP WATER
4. REMOVE AND PREVENT BACTERIAL GROWTH
5. CLEAN WATER AND PREVENT BACTERIAL GROWTH
6. REMOVE BACTERIA FROM TAP WATER AND PREVENT BACTERIAL GROWTH
7. REMOVE BACTERIA FROM TAP WATER AND PREVENT BACTERIAL GROWTH
8. REMOVE BACTERIA FROM TAP WATER AND PREVENT BACTERIAL GROWTH

DISPOSAL: Wrap old cartridge in newspaper and dispose with trash.

The silver is a preservative to inhibit bacterial growth within the activated carbon filler media.

CAUTION: MAXIMUM PRESSURE 125 PSI (8.6 bar)
MAXIMUM INLET WATER TEMPERATURE 100 F (38 C)
PROTECT FROM WATER HAMMER OR FREEZING

CULLIGAN INTERNATIONAL COMPANY

20000 W. 15th Ave., Denver, CO 80202