OSMOSE K-33 (72%)

WOOD PRESERVATIVE

(For Pressure Plant Use Only)

DIRECTIONS FOR USE TO BE USED IN ACCORDANCE WITH AWPA OR FEDERAL SPECIFICA-TIONS REFER TO OSMOSE OPERATING MANUAL FOR SPECIFIC RECOMMENDATIONS.


ACTIVE INGREDIENTS

Arsenic Pentoxide 32 1 % Chromic Acid 25.4% Copper Oxide 14.1%

INERT INGREDIENTS

28.0% 100.0%

NET CONTENITS: 275 lbs.

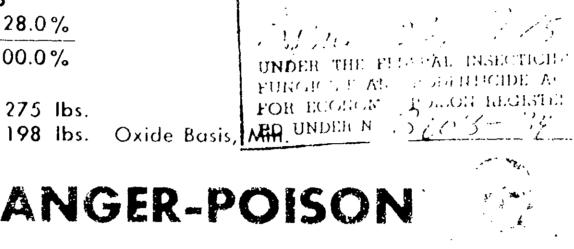



DANGER-POISON

PC'SONOUS IF SWALLOWED

May cause rash or external ulcers. Wear goggles or face shield and rubber gloves when handling. Avoid contact with skin, eyes or clothing. In case of contact flush skin or eyes with plenty of water. For eyes get medical attention. Wash thoroughly after using. Wash clothing before re-use. Do not breathe spray mist.

All waste pesticide should be removed from this container and empty container decontaminated thoroughly before disposal in any other manner.

This product is toxic to fish and wildlife. Keep out of lakes, streams, or ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes.

FIRST AID

Give two tablespoons of milk of magnesia or aluminum hydroxide gel suspended in water (the whites of two or three eggs may be used). Follow with an emotic (a tablespoon of mustard or table salt in a glass of warm water). Then give olive oil or mucilaginous drink. Never give anything by mouth to an unconscious person. CALL A PHYSICIAN IMMEDIATELY,

DIRFCTIONS FOR DECONTAMINATION

En contents into mixing tank and flush container clean with 500 gallons of water which shall be reused for diluting treating solution. Puncture and safely bury cleaned container.

DANGER KEEP OUT OF REACH OF CHILDREN

Manufactured by OSMOSE WOOD PRESERVING CO. OF AMERICA, INC. 980 Ellicott St. Buffaio NY 14209 E. P. A. Reg. No. 3008-34

EPA ESE 3008 TN 1

•



WATER SOLUTE ARSENIC AS METALLIC 21.1%